




Perm-O-Pads® Integrated Circuit Mounts

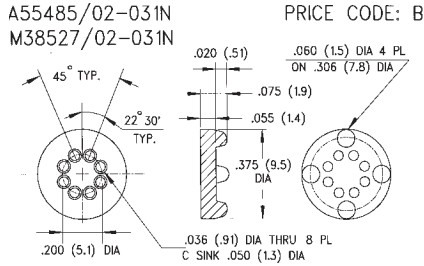


610-075 8 LEADS

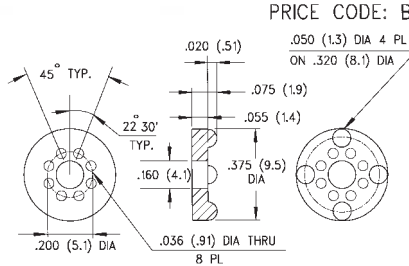

615-075 8 LEADS

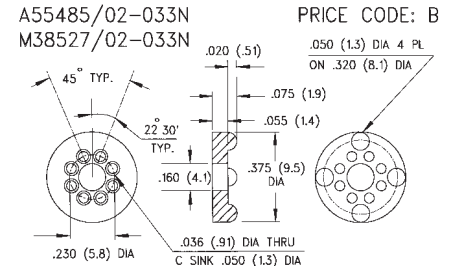


617-075 8 LEADS

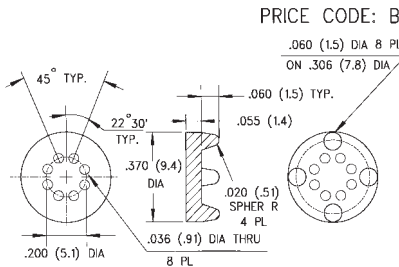


603-115 8 LEADS


**ONLY THE FINEST
U.L. RATED MATERIALS
ARE USED
PRECISION MOLDED**

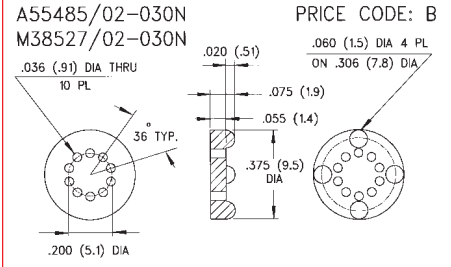


611-075 10 LEADS

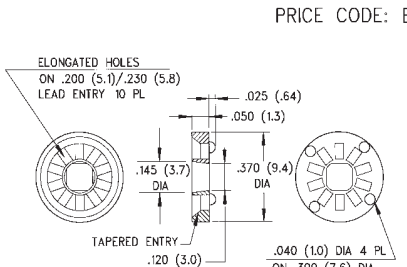

606-075 COLOR: RED 10 LEADS

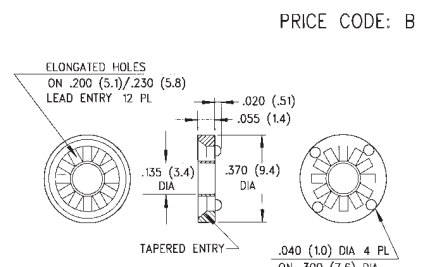


607-075 12 LEADS

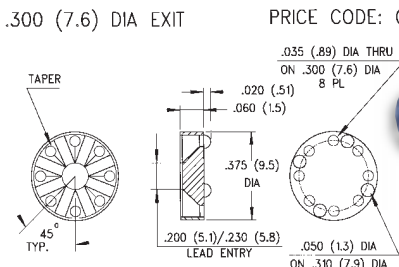


711-085 8 LEADS


**VISIT US ON-LINE!
www.bivar.com**

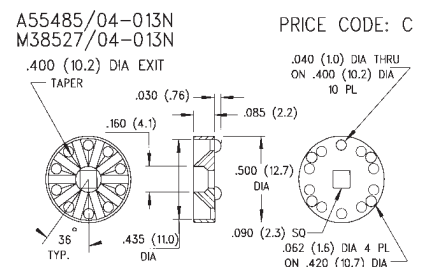


701-130 COLOR: RED 10 LEADS

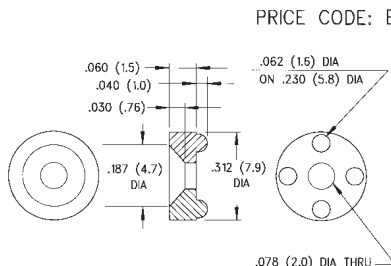

400-100



420-078

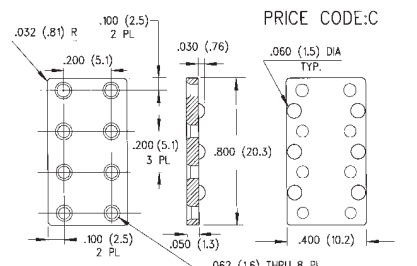

408-080

Material Specifications:

White or Natural Nylon, per ASTM D 4066 PA111, U.L. Rated 94V-2

Oxygen Rating Index: Over 28%

Standard Drawing Tolerances, unless otherwise indicated:

Fractions: = ± 1/64 (.40) .X = ± 1/64 (.40) .XX = ± .010 (.254) .XXX = ± .005 (.127)

