



**Sample Kit Contents**

Part Number	Maximum Operating Voltage (VDC)	Nominal Capacitance		Maximum ESR @ 1 kHz (Ω)	Maximum Current @ 30 Minutes (mA)	Voltage Holding Characteristic Minimum (V)	Weight (g)	Quantity
		Charge System (F)	Discharge System (F)					
FME0H223ZF	5.5	0.022	0.028	40	0.033	—	1.3	10
FME0H473ZF	5.5	0.047	0.06	20	0.071	—	1.3	10
FM0H473ZF	5.5	0.047	0.06	200	0.071	4.2	1.3	10
FM0H104ZF	5.5	0.10	0.13	100	0.15	4.2	1.6	10
FMR0H104ZF	5.5	0.10	—	50	0.15	4.2	1.6	10
FM0H224ZF	5.5	—	0.22	100	0.33	4.2	1.6	10
FM0V224ZF	3.5	0.22	0.30	100	0.20	—	1.6	10
FMC0H334ZF	5.5	—	0.33	25	0.50	4.2	3.5	10

**Dimensions – Millimeters**

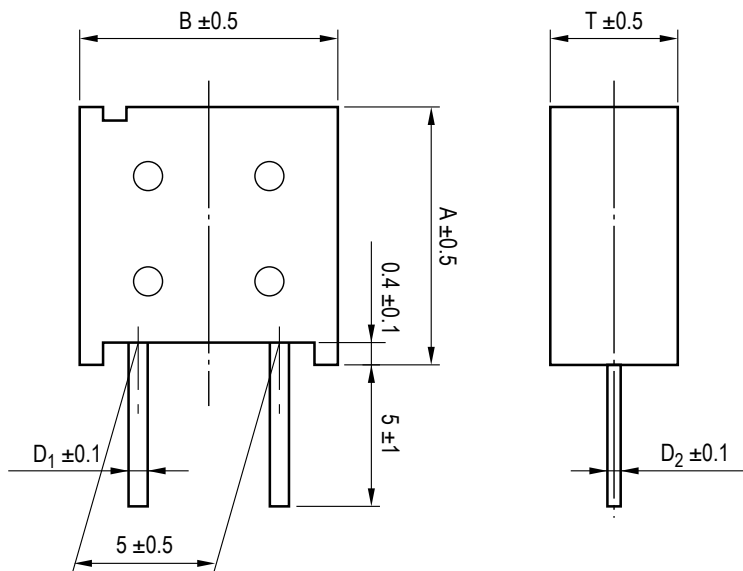

Part Number	A	B	T	D <sub>1</sub>	D <sub>2</sub>
FM0H223ZF	11.5	10.5	5.0	0.5	0.4
FM0H473ZF	11.5	10.5	5.0	0.5	0.4
FME0H473ZF	11.5	10.5	5.0	0.5	0.4
FM0H104ZF	11.5	10.5	6.5	0.5	0.4
FMR0H104ZF	11.5	10.5	6.5	0.5	0.4
FM0H224ZF	11.5	10.5	6.5	0.5	0.4
FM0V224ZF	11.5	10.5	6.5	0.5	0.4
FMC0H334ZF	15.0	14.0	9.0	0.6	0.6



[www.kemet.com/fm](http://www.kemet.com/fm)