

You are here: Products » Connectors f.con » PCB connectors » Male headers » SL LP 6 SMD ... »  

- ▶ Heatsinks f.cool
- ▶ Cases f.case
- ▼ **Connectors f.con**
  - ▶ Sockets
  - ▼ PCB connectors
    - **Male headers**
    - Female headers
    - Direct female connectors
    - Jumpers
  - ▶ IDC-connectors
  - ▶ D-Sub connectors
  - Brackets for PC
  - ▶ Optoelectronics


**Male headers**


**SL LP 6 SMD ...**

**SL LP 6 SMD 066 14 S B TR**

□ 0.635 mm, low profile

[Data sheet](#)

[add to request](#) 

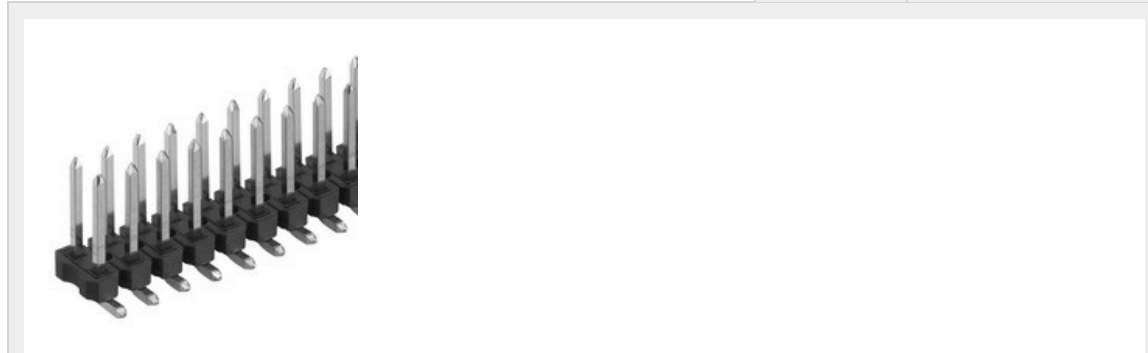

- Features
- Technical Drawing
- Equipping
- Variants
- Service
- Accessories / related products

<b>grid</b>	2.54 mm
<b>no. of contacts</b>	14
<b>contact material</b>	CuSn alloy
<b>surface of contact</b>	selective gold-plated
<b>surface contact /</b>	Ni+≥0.2µm Au
<b>contact sleeve</b>	Ni+4...6µm Sn
<b>version</b>	male header
<b>volume resistance</b>	≤5 mΩ
<b>nominal current</b>	3 A
<b>nominal voltage</b>	250 V AC
<b>test voltage</b>	2000 V
<b>insulating body material</b>	PA 4.6. GF
<b>temperature range</b>	-40°C... +163°C (260°C/10 s)
<b>class of inflammability</b>	UL 94 V-0
<b>specific insulation resistance</b>	>10.0 <sup>70</sup> Ω·m
<b>connection type</b>	SMD
<b>positioning</b>	locating pin (2 pcs/bar bigger than 6 contacts)
<b>reflow solderable</b>	yes
<b>packing</b>	pick and place pad and tape and reel (250pcs/reel)