



| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | COMPONENT NOTES |
|----------|-------------|--|------|-----------------|
| 1 | 50-00406 | Connector, stereo plug, 2.5xL19.6 mm, brass, nickel plated, white, molding style | 1 | |
| 2 | 30-00180 | Wire, 3C BC, 28 AWG, 300V, 80C, 3.8 mm, foil + shield, PVC, white | 1 | |
| 3 | 24-00028 | Overmold, PVC | 1 | white |

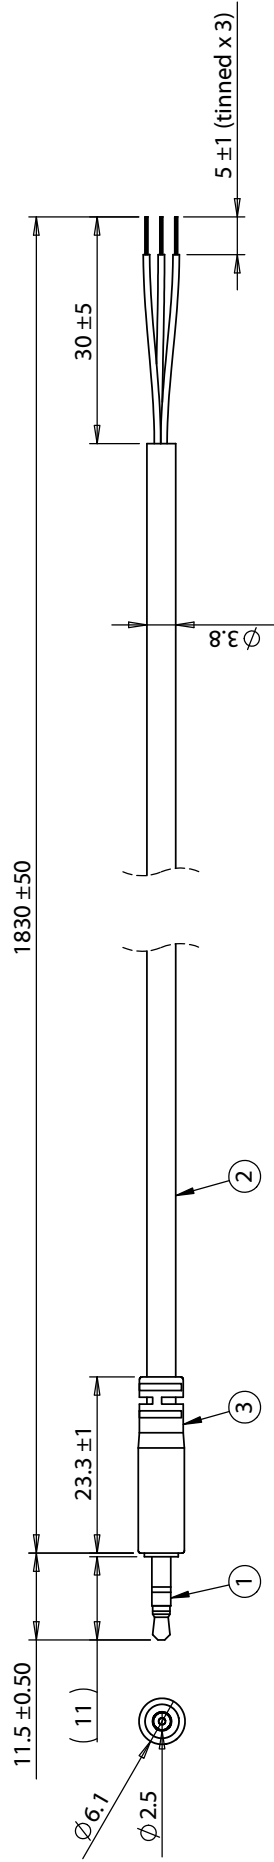

| Wiring Diagram | |
|----------------|------------|
| 50-00406 | wire color |
| A | red |
| B | white |
| C | green |

Notes:
 Cables individually tied and bundled in groups of 10
 Functionally equivalent components may be substituted

| Revision: | Date: | Description: | Prepared: | Notes: |
|-----------|------------|-------------------------------|--|--|
| A1 | 10/5/2010 | Updated wiring diagram | GL Digitally signed by GL Date: 2016.10.28 13:48:51 -0700 | RoHS compliant |
| A2 | 9/6/2011 | Updated specification | DN Digitally signed by DN Date: 2016.10.28 15:04:29 -0700 | Function test: no open, no short circuit, no intermittent |
| A3 | 3/28/2012 | Updated wire part number | Dimensions are in millimeters. | Description: Cable, 1830 mm, 2.5 mm 50-00406 slim stereo plug to 5 mm tinned, 28 AWG, 30-00180, shielded, white |
| A4 | 10/8/2014 | Updated connector | Tolerances: X: ± 0.5 mm XX: ± 0.3 mm XXX: ± 0.05 mm | Size: Part number: A 10-00333 |
| A5 | 10/21/2016 | Corrected overmold dimensions | | Scale: 1:1 |

TENSILITY

tel 1.541.323.3228 800 877.670.7118
 fax 1.541.323.4202 web tensility.com

Sheet 1 of 1