

You are here: Products » Connectors f.con » PCB connectors » Male headers » SL LP 6 SMD... » SL LP 6 SMD 066



Heatsinks f.cool

Cases f.case

Connectors f.con

Sockets

PCB connectors

Male headers

Female headers

Direct female connector

Jumpers

IDC-connectors

D-SUB connectors

Brackets for PC


Optoelectronics

Male headers

SL LP 6 SMD 066 6 Z

0.635 mm, low profile

add to request

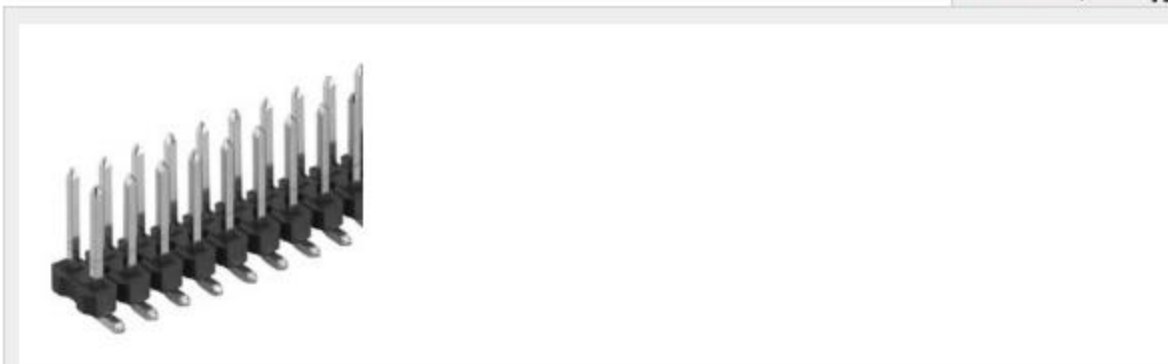

Features Technical Drawing Equipping Variants

no. of contacts	6
contact material	CuSn-Legierung
surface contact / contact sleeve	Ni+0,2µm Au Ni+4...6µm Sn
surface of contact	tin-plated
volume resistivity	≤5 mΩ
nominal current	3 A
nominal voltage	250 V AC
test voltage	2000 V
material isolation body	PA4.6, GF
temperature range	-40 °C ... +163 °C (260 °C / 10 s)
class of flammability	UL 94 V0
insulation resistance	> 10 ¹² Ω
connection type	SMD
version	female header
positioning	locating pin (2 pcs/bar bigger than 6 contacts)
reflow solderable	yes
packing	bar magazine pick and place pad and bar magazine pick and place pad and tape and reel (250pcs/reel)