



270 Series

Vitreous Enamel Power

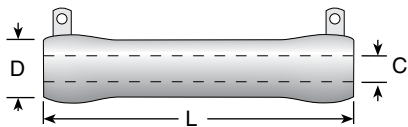

See page 36 for mounting hardware

FEATURES

- Terminals suitable for soldering or bolt connection
- High wattage applications
- Rugged lead free vitreous enamel coating
- Flame resistant coating
- All-welded construction
- RoHS compliant available
- "Fast on" option – see terminal 538, page 37

SPECIFICATIONS

- Material**
Coating: Lead free vitreous enamel. Very large models (750 watts and up) are supplied in Silicone Ceramic. Also available in low-cost Centohm coating; Consult factory.
Core: Tubular ceramic.
Terminals: Solder coated radial lug. RoHS solder composition is 96% Sn, 3.5% Ag, 0.5% Cu
Derating: Linearly from 100% @ +25°C to 0% @ +350°C.
Electrical
Tolerance:
 ±5% 1Ω and over (J)
 ±10% under 1Ω (K)
Power rating: Based on 25°C free air rating.
Overload: 10 times rated wattage for 5 seconds.
Temperature coefficient:
 1 to 20Ω: ±400 ppm/°C.
 Above 20Ω: ±260 ppm/°C
Dielectric withstanding voltage:
 1000 VAC: 12 to 100 watt rating.
 3000 VAC: 175 to 225 watt rating (Measured from terminal to mounting bracket)
To calculate max. amps: use the formula $\sqrt{P/R}$

Series	Wattage	Ohms	Dimensions (in. / mm)			Core Code	Voltage	Standard Terminal
			L	D	C			
L12	12	0.1-51K	1.75 / 44.4	0.313 / 7.94	0.188 / 4.76	D	565	57
L25	25	0.15-100K	2.0 / 50.8	0.562 / 14.3	0.313 / 7.94	K	625	40
L50	50	0.38-260K	4.0 / 101.6	0.562 / 14.3	0.313 / 7.94	K	1625	40
L100	100	0.23-101K	6.5 / 165.1	0.750 / 19.1	0.50 / 12.7	M	2845	40
L175	175	0.13-101K	8.5 / 215.9	1.125 / 28.6	0.75 / 19.1	P	3595	46
L225	225	0.16-129K	10.5 / 266.7	1.125 / 28.6	0.75 / 19.1	P	4595	46
L500	500	0.38-218K	12.0 / 304.8	2.50 / 63.5	1.75 / 44.5	S	4970	45
L1000	1000	0.69-392K	20.0 / 508.0	2.50 / 63.5	1.75 / 44.5	S	8900	45

Non-Inductive versions available; Other sizes available; Also available in low cost Centohm or Silicone coating; Consult Ohmite.
 * Maximum Voltage is based on Ohm's Law $[V=\sqrt{P \cdot R}]$ as limited by the resistance value of specified product

Select 270 Type fixed resistors for applications requiring wattage ratings from 12 to 1000 watts. The 270 Type resistors are equipped with lug terminals suitable for soldering or sturdy bolt connection. When secure mounting is required, the hollow core of these resistors permit fastening with spring-type brackets, thru bolts or thru bolts with slotted-steel brackets. Suitable for rugged applications, the 270 Type resistors feature all-welded construction and durable lead free vitreous enamel coating. Mounting brackets not included with resistors.

ORDERING INFO

F = Fast on (optional)
 Non-inductive Blank = Standard N = Non-inductive
 RoHS Compliant

L 25 J 100 E

Series: L
 Wattage: 25
 Tolerance: J = 5%
 Ohms: 100

Coating: Blank = Vitreous, C = Centohm, S = Silicone
 J = 5%, K = 10%
 1R0 = 1 Ω, 250 = 250 Ω, 1K0 = 1,000 Ω, 25K = 25,000 Ω, 25K5 = 25,500 Ω

MADE-TO-ORDER PARTS

Non-inductive Blank = Standard N = Non-inductive
 Core Diameter See "Core and Terminal Selection"
 RoHS Compliant

270 50 K 405 R 00 J E

Coating: 270 = Vitreous, 470 = Silicone Ceramic
 Wattage: 50
 Ohms: R500 = 0.500 Ω, 1R00 = 1 Ω, 250R = 250 Ω, 1K00 = 1,000 Ω, 25K0 = 25,000 Ω, 25K5 = 25,500 Ω
 Terminal Type See "Resistor Terminals for Tubular Cores"
 J = 5%, K = 10%

See website for custom core and terminal info

Power limitations for high resistance values: When resistance exceeds the resistance values listed, derate the Power Rating by 25% to improve reliability:

Power rating	Resistance value	No power derating necessary for ratings higher than
12W	3,900Ω	100W.
25W	12,000Ω	
50W	35,000Ω	
100W	75,000Ω	

STANDARD PART NUMBERS FOR 270 SERIES

Ohmic value	Wattage										Ohmic value	Wattage																				
	12 Watt		25		50		100		175			225		500		1000		25		50		100		175		225		500		1000		
Part No. Prefix Suffix	L25J	L50J	L100J	L175J	L225J	L500J	L1000J	L25J	L50J	L100J	L175J	L225J	L500J	L1000J	L25J	L50J	L100J	L175J	L225J	L500J	L1000J	L25J	L50J	L100J	L175J	L225J	L500J	L1000J				
0.51	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
1	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
3.3	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
4.7	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
10	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
12	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
15	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
22	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
27	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
33	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
47	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
68	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
82	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
100	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
150	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
								51000	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
✓ = Standard values; check availability using the worldwide inventory search at www.ohmite.com																																
Red outlined values supplied in Silicone-Ceramic coatings instead of vitreous enamel.																																