


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00026	Connector, dc plug, 5.5x2.5xL23 mm, molding style, spring contacts	1	
2	50-00027	Connector, dc jack, 5.5x2.5xL17.4 mm, molding style	1	
3	30-00440	Wire, 2C TS, 16 AWG, UL2468, 300V, 80C, 4.8 mm, VW-1, PVC, 87A	1	
4	24-00003	Overmold, PVC	1	black
5	24-00004	Overmold, PVC	1	black

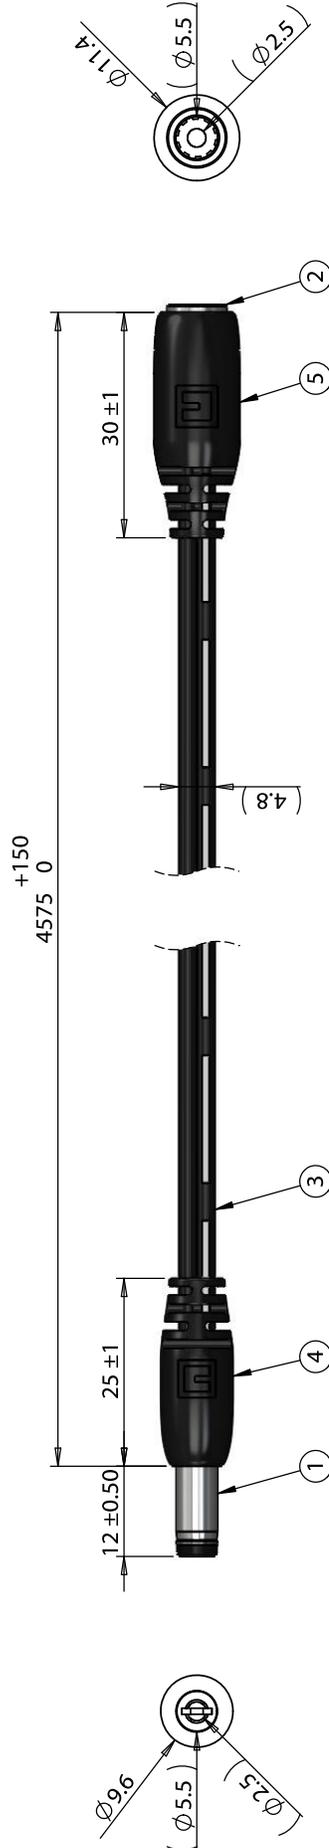

Wiring Diagram		wire color	50-00027
center	sleeve	black with stripe	center
		black	sleeve

Notes:
Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared:	Notes:
A	11/22/2016	Initial release	AW Digitally signed by AW Date: 2016.06.12 11:24:11 -0700	TENSILITY tel/ 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
			Verified: AG Digitally signed by AG Date: 2016.06.12 16:28:37 -0700	Size: Part number: A 10-02392
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Scale: 1:1
				Description: Cable, 4575 mm, 5.5x2.5x12 mm 50-00026 dc plug to 5.5x2.5 mm 50-00027 dc jack, 16 AWG, 30-00440 wire
				RoHS compliant Function test: no open, no short circuit, no intermittent
				Sheet 1 of 1