



HIGH-SPEED LTE NETWORKING PLATFORM



DIGI TRANSPORT LR54

High-speed LTE-Advanced and Wi-Fi router in a durable hardware package for demanding M2M applications

Digi TransPort® LR54 is a high-speed LTE-Advanced networking platform designed for retail, commercial and managed networking applications across distributed enterprises. Each device features an LTE-Advanced Cat 6 modem with speeds up to 300 Mbps and support for global deployments with a single hardware version, as well as a 4-port Gigabit Ethernet switch and serial port for console access. The routers include license-free enterprise software features like VPN, firewall and SNMP.

The two FIPS models make use of an embedded FIPS 140-2 validated cryptographic module for all encryption and authentication functions.

The LR54 FIPS model is often used as a VPN gateway to bridge local private subnets through public or untrusted networks, ensuring message privacy and integrity.

The Wi-Fi variant features dual-band, dual-concurrent 5 GHz and 2.4 GHz radios, personal/enterprise security, and multiple SSIDs for maximum range and throughput performance in M2M applications.


Digi TransPort LR54 is ideal for connecting:

- Retail branch sites
- Digital media installations
- Self-service kiosks
- Security monitoring equipment
- Remote offices/equipment
- Guest and employee Wi-Fi users

FEATURES AND BENEFITS

- High-speed LTE Advanced for digital content and business networking applications
- Powerful dual Wi-Fi radios provide 802.11 b/g/n/ac connection to local users and end devices
- Automated fail-over/fail-back between Ethernet, cellular (dual SIMs) and IPsec tunnels
- Enables compliance with NIST SP 800-171 requirement for FIPS-validated cryptography
- On-board Python environment for custom programming
- Digi Remote Manager® provides mass configuration, device management and troubleshooting tools
- Digi Foundations™ 1-, 3- or 5-year subscription available

APPLICATION EXAMPLE

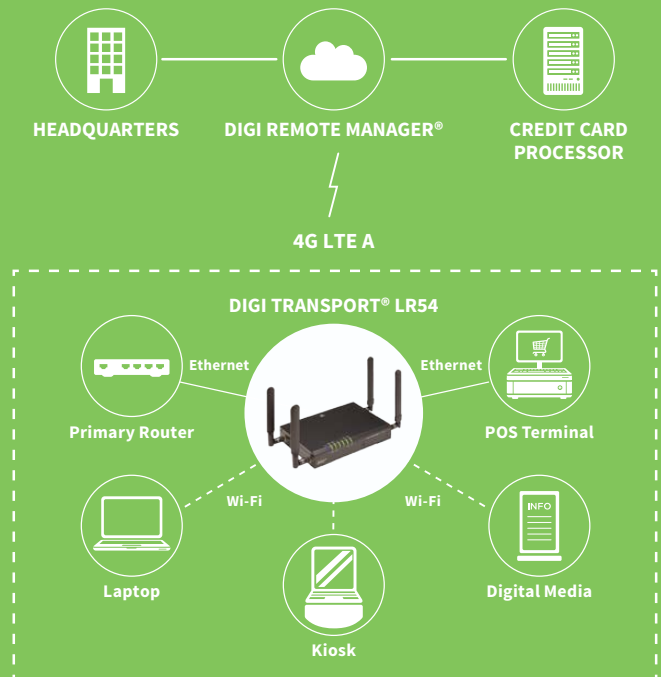

RELATED PRODUCTS



SPECIFICATIONS

Digi TransPort® LR54

WIRELESS INTERFACES

CELLULAR*

LTE/HSPA+	Coverage: North America/EMEA LTE Advanced Cat 6: 700(B12,B13,B29)/800(B20,B26)/850(B5)/900(B8)/AWS(B4)/1800(B3)/1900(B2,B25)/2100(B1)/2300(B30)/2500(B41)/2600(B7) 3G HSPA+: 850/900/AWS/1800/1900/2100 MHz Transfer rate (max): 300 Mbps down, 150 Mbps up Approvals: PTCRB, AT&T, Verizon
CONNECTOR	(2) 50 Ω SMA (center pin: female)
SIM SLOTS	(2) Mini-SIM (2FF)
SIM SECURITY	SIM slot cover plate

WI-FI

802.11	Wi-Fi maximum data rates: 54 Mbps (802.11a); 11 Mbps (802.11b); 54 Mbps (802.11g); 300 Mbps (802.11n); 866 Mbps (802.11ac)
TX POWER	2.4 GHz 19 dBm (802.11g/n), 19 dBm (802.11b) 5 GHz 22.9 dBm for all modes
RX SENSITIVITY	-87 dBm / 11 Mbps (802.11b) -71 dBm / 54 Mbps and -90 dBm / 6 Mbps (802.11a) -74 dBm / 54 Mbps and -92 dBm / 6 Mbps (802.11g) -66 dBm / 300 Mbps and -92 dBm / 6 Mbps (802.11n 2.4 GHz) -67 dBm / 300 Mbps and -89 dBm / 6 Mbps (802.11n 5 GHz) -57 dBm / 866 Mbps and -83 dBm / 29 Mbps (802.11ac)
MODES	Access point, support for multiple SSID
SECURITY	Mixed WPA/WPA2-personal; WPA2-personal; mixed WPA/WPA2-enterprise; WPA2-enterprise
CONNECTORS	(2) 50 Ω RP-SMA (center pin: male)

WIRED INTERFACES

SERIAL

PORTS	(1) DB-9; DCE
STANDARD	RS-232
SIGNAL SUPPORT	TXD, RXD, RTS, CTS, DTR, DCD, DSR, RI
FLOW CONTROL	Software (XON/XOFF), hardware supported

ETHERNET

PORTS	(4) RJ-45; 10/100/1000 Mbit/s (auto-sensing)
-------	--

MANAGEMENT

REMOTE MANAGEMENT	Digi Remote Manager® (cloud based); SNMP v1/v2c/v3 (user installed/managed)
LOCAL MANAGEMENT	Web interface (HTTPS); CLI (SSH, serial port)
MEMORY	256 MB of Flash; 100 MB user available memory

POWER

INPUT	12 VDC
CONNECTOR	4-pin terminal block; power supply comes with US plug (IEC Type A) and an EU plug (IEC Type C)
CONSUMPTION	13.68 W max, 11.4 W average
DC POWER SUPPLY	100-240 VAC 50/60 Hz

PHYSICAL

DIMENSIONS (L X W X H)	207 mm x 140 mm x 38 mm (8.15 in x 5.5 in x 1.5 in)
WEIGHT	1.32 kg (2.90 lb)
STATUS LEDs	Power, WWAN signal, WWAN service, SIM 1, SIM 2, 2.4 GHz and 5 GHz LEDs on Wi-Fi version
MATERIAL/RATING**	Industrial (metal) / IP30
MOUNTING	Wall mount bracket sold separately

* Transfer rates are network operator dependent

**The enclosure rating is self-declared and has not been formally verified by an independent lab

SPECIFICATIONS

Digi TransPort® LR54

ENVIRONMENTAL

OPERATING TEMPERATURE ***	-20° C to 70° C (-4° F to 158° F)
STORAGE TEMPERATURE	-40° C to 85° C (-40° F to 185° F)
RELATIVE HUMIDITY	0% to 95% (non-condensing) @ 25° C (77° F)

APPROVALS

CELLULAR	PTCRB
WI-FI	Wi-Fi Alliance® Wi-Fi CERTIFIED™
MATERIALS	RoHS
SAFETY	CB Scheme, IEC 60950-1
EMISSIONS/IMMUNITY	CE, FCC Part 15 Class B

WARRANTY

PRODUCT WARRANTY	3-year + Digi Foundations****
------------------	-------------------------------

***The enclosure rating is self-declared and has not been formally verified by an independent lab

****Digi Foundations can extend the standard three-year warranty to a Limited Lifetime Warranty that provides replacement with a new or similar Digi product for a period of five years from the date of purchase. After five years from the purchase date, the warranty value will revert to a 40 percent credit towards the MSRP of an equivalent product from Digi.

ENTERPRISE SOFTWARE

DESCRIPTION

MANAGEMENT PROTOCOLS	HTTPS, TLS1.0/1.1/1.2, SFTP, SCP,SNMP (v1/v2c/v3), SSHv2,CLI for web management; remote management via Digi Remote Manager; protocol analyzer, ability to capture PCAP for use with Wireshark, syslog support for streaming event and system logs
SECURITY/VPN	Stateful inspection firewall with scripting; VPN: IPsec with IKEv1; OpenVPN (32) VPN Tunnels; Cryptology: SHA-1/SHA256, RSA, DH Groups 5,14,15,16,17,18 ; Encryption: AES up to 256-bit; Ethernet Port Isolation; RADIUS
ROUTING/FAILOVER	NAT, NAPT with IP port forwarding; IP failover: automatic failover/failback to second GSM network/standby APN, IP port forwarding
OTHER PROTOCOLS	IPv4, IPv6, DHCP, GRE, DMNR, DSCP (QoS)

PRODUCT IMAGES


DIGI TRANSPORT LR54



DIGI TRANSPORT LR54 (WITH WI-FI)



DIGI REMOTE MANAGER®

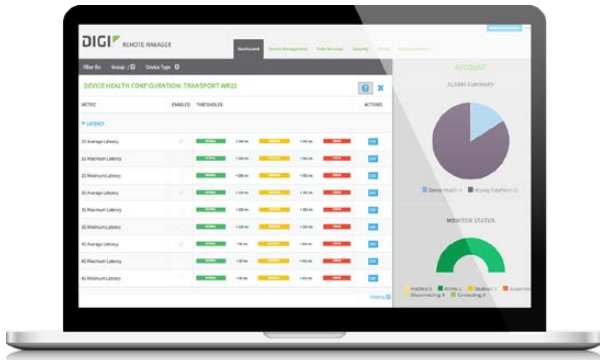

INFRASTRUCTURE

- Hosted in a commercial-grade SAS 70-certified environment
- Superior availability, operating to 99.9% or greater
- Open APIs available to support application development


CAPABILITIES

- Centralized management of remote devices over 3G/4G LTE
- Define standard configurations and automatically monitor individual devices for PCI security compliance
- Report and alert on performance statistics, including connection history, signal quality, latency, data usage and packet loss
- No servers or applications to operate and maintain
- Complete tasks for your entire device network in minutes
- Edit configurations and update firmware for your individual devices or groups
- Monitor the status and location of your remote device via a web browser
- Active or deactivate cellular lines and monitor data to ensure you never incur overage charges

SECURITY

- Certified SSAE-16 facilities
- Member of the Cloud Security Alliance
- Over 175 security controls in place to protect your data
- Enables compliance with security frameworks like PCI, HIPAA, NIST and more
- Earned SkyHigh's Cloud Trust Program highest ranking of Enterprise-Ready

DIGI FOUNDATIONS™

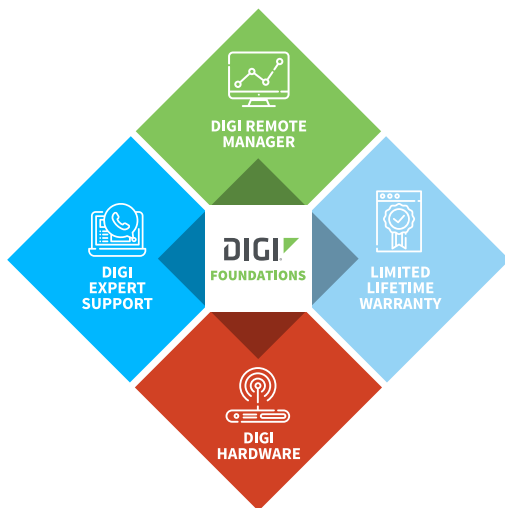

IT'S TIME TO CONNECT WITH CONFIDENCE

The convenient, comprehensive and secure way to integrate IoT communications hardware, device management software, global support and lifetime warranty protection into a connectivity solution to simplify your IoT network growth.

- [Digi Remote Manager®](#) (DRM) gives you a single point of contact, command and control with sophisticated remote device monitoring and management tools.
- [Digi Expert Support](#) is available around the clock, seven days a week, around the world with experts ready to provide technical support by phone, email or online.
- [Digi Limited Lifetime Warranty](#) lowers the total cost of ownership with hardware protection and equipment upgrades to expand your network as needs evolve.

Digi Foundations, with DRM, simplifies network and device management – for hundreds or hundreds-of-thousands of Digi or third-party devices – with options to upgrade as technology evolves. Isn't it time you got better connected?

For more information visit: digi.com/foundations

PART NUMBERS	DIGI TRANSPORT LR54
LR54-AA401	Digi TransPort LR54 - 4G LTE North America/EMEA, No Wi-Fi
LR54-AW401	Digi TransPort LR54 - 4G LTE North America/EMEA, Wi-Fi
LR54-AA403	Digi TransPort LR54 - 4G LTE North America/EMEA, No Wi-Fi, FIPS 140-2
LR54-AW403	Digi TransPort LR54 - 4G LTE North America/EMEA, Wi-Fi, FIPS 140-2

DIGI FOUNDATIONS™	AVAILABLE FOR DIGI TRANSPORT LR54
DGF-BDL-STAN-1YR	Digi Foundations add-on, 1 year, includes Expert Support, Digi Remote Manager, and Limited Lifetime Warranty
DGF-BDL-STAN-3YR	Digi Foundations add-on, 3 years, includes Expert Support, Digi Remote Manager, and Limited Lifetime Warranty
DGF-BDL-STAN-5YR	Digi Foundations add-on, 5 years, includes Expert Support, Digi Remote Manager, and Limited Lifetime Warranty

PART NUMBERS	ACCESSORIES
7800001	Mounting bracket - wall-mount

FOR MORE INFORMATION
PLEASE VISIT DIGI.COM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2019 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

95003316
B1/1019

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn

