

IB IL 24 PSDO 4/4-PAC - Safety module



2916493

<https://www.phoenixcontact.com/us/products/2916493>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safety digital output module, IP20 degree of protection, for the SafetyBridge-, INTERBUS-Safety- and the PROFIsafe system. It has four safe digital outputs which include one positive and one negative switching output each depending on the parameterization.

Product description

The safety module is an output module from the Inline product range designed for use at any point within a SafetyBridge, INTERBUS-Safety or PROFIsafe system. The transmission speed of the safety module can be set to 500 kBaud or 2 Mbaud using a switch. One transmission speed must be used consistently within a station. The module has four safe digital outputs for two-channel assignment or four digital outputs for single-channel assignment.

Your advantages

- SIL 3 according to IEC 61508/EN 61508
- SIL 3 in accordance with EN IEC 62061
- PL e in accordance with EN ISO 13849-1

Commercial data

Item number	2916493
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN03
Product key	DNA431
Catalog page	Page 267 (C-6-2019)
GTIN	4046356286626
Weight per piece (including packing)	361.96 g
Weight per piece (excluding packing)	247.7 g
Customs tariff number	85389091
Country of origin	DE

IB IL 24 PSDO 4/4-PAC - Safety module




2916493

<https://www.phoenixcontact.com/us/products/2916493>

Technical data

Dimensions

Dimensional drawing	
Width	48.8 mm
Height	119.8 mm
Depth	71.5 mm
Note on dimensions	Housing dimensions

Interfaces

Inline local bus

No. of channels	2
Connection method	Inline data jumper
Transmission speed	500 kbps / 2 Mbps (can be switched)

System properties

Module

ID code (dec.)	167
ID code (hex)	A7
Length code (hex)	04
Length code (dec)	04
Process data channel	8 Byte
Input address area	8 Byte ((Operating mode: SafetyBridge))
Output address area	8 Byte ((Operating mode: SafetyBridge))
Register length	8 Byte
Required parameter data	1 Byte ((Operating mode: SafetyBridge))
Required configuration data	5 Byte ((Operating mode: SafetyBridge))

Output data

Digital

Output name	Digital outputs
Output description	+/- switching
Connection method	Spring-cage connection
Connection technology	2-, 3-conductor
Number of outputs	4 (for 2-channel assignment, +/- switching) 4 (for 1-channel assignment, + switching)

IB IL 24 PSDO 4/4-PAC - Safety module



2916493

<https://www.phoenixcontact.com/us/products/2916493>

	4
Protective circuit	Overload protection, short-circuit protection of outputs
Output voltage	24 V DC ($U_S - 1$ V)
Output current	max. 3 A (Total current of all outputs)
Maximum output current per channel	2 A
Maximum output current per module	3 A (See technical data)
Nominal output voltage	24 V DC
Behavior with inductive overload	Output can be destroyed

Product properties

Type	modular
Product type	I/O component
Product family	Inline
Application	Functional safety
Diagnostics messages	Short-circuit or overload of the digital outputs Error message in diagnostics code (bus) and display by means of the LED on the motor

Electrical properties

Maximum power dissipation for nominal condition	78 W
Transmission medium	Copper

Potentials: Communications power (U_L)

Supply voltage	7.5 V DC (see safety data)
Current draw	max. 230 mA

Potentials: Main circuit supply (U_M)

Supply voltage	24 V DC
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current draw	max. 3.03 A typ. 30 mA (all outputs set including actuator current)

Potentials: Segment circuit supply (U_S)

Supply voltage	24 V
----------------	------

Supply: Module electronics

Supply voltage	24 V DC (via voltage jumper)
Supply voltage range	19.2 V DC ... 30 V DC

Electrical isolation/isolation of the voltage ranges

Test voltage: 5 V supply, incoming remote bus/7.5 V supply (bus logics)	500 V AC, 50 Hz, 1 min.
Test voltage: 5 V supply, outgoing remote bus/7.5 V supply (bus logics)	500 V AC, 50 Hz, 1 min.
Test voltage: 7.5 V supply (bus logics)/24 V supply (I/O)	500 V AC, 50 Hz, 1 min.
Test voltage: 24 V supply (I/O) / functional ground	500 V AC, 50 Hz, 1 min.

Connection data

IB IL 24 PSDO 4/4-PAC - Safety module



2916493

<https://www.phoenixcontact.com/us/products/2916493>

Connection technology

Connection name	Inline connector
pluggable	yes

Conductor connection

Connection method	Spring-cage connection
Conductor cross section rigid	0.2 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 1.5 mm ²
Conductor cross section AWG	24 ... 16

Inline connector

Connection method	Spring-cage connection
Conductor cross section, rigid	0.2 mm ² ... 1.5 mm ²
Conductor cross section, flexible	0.2 mm ² ... 1.5 mm ²
Conductor cross section AWG	24 ... 16

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
Degree of protection	IP20
Air pressure (operation)	80 kPa ... 108 kPa (up to 2000 m above sea level)
Air pressure (storage/transport)	66 kPa ... 108 kPa (up to 3500 m above sea level)
Ambient temperature (storage/transport)	-25 °C ... 70 °C
Permissible humidity (operation)	10 % ... 85 % (Take suitable measures against increased air humidity within the permitted temperature range.)
Permissible humidity (storage/transport)	10 % ... 85 % (Take suitable measures against increased air humidity within the permitted temperature range.)

Standards and regulations


Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------

Mounting

Mounting type	DIN rail mounting
---------------	-------------------

Drawings

Connection diagram

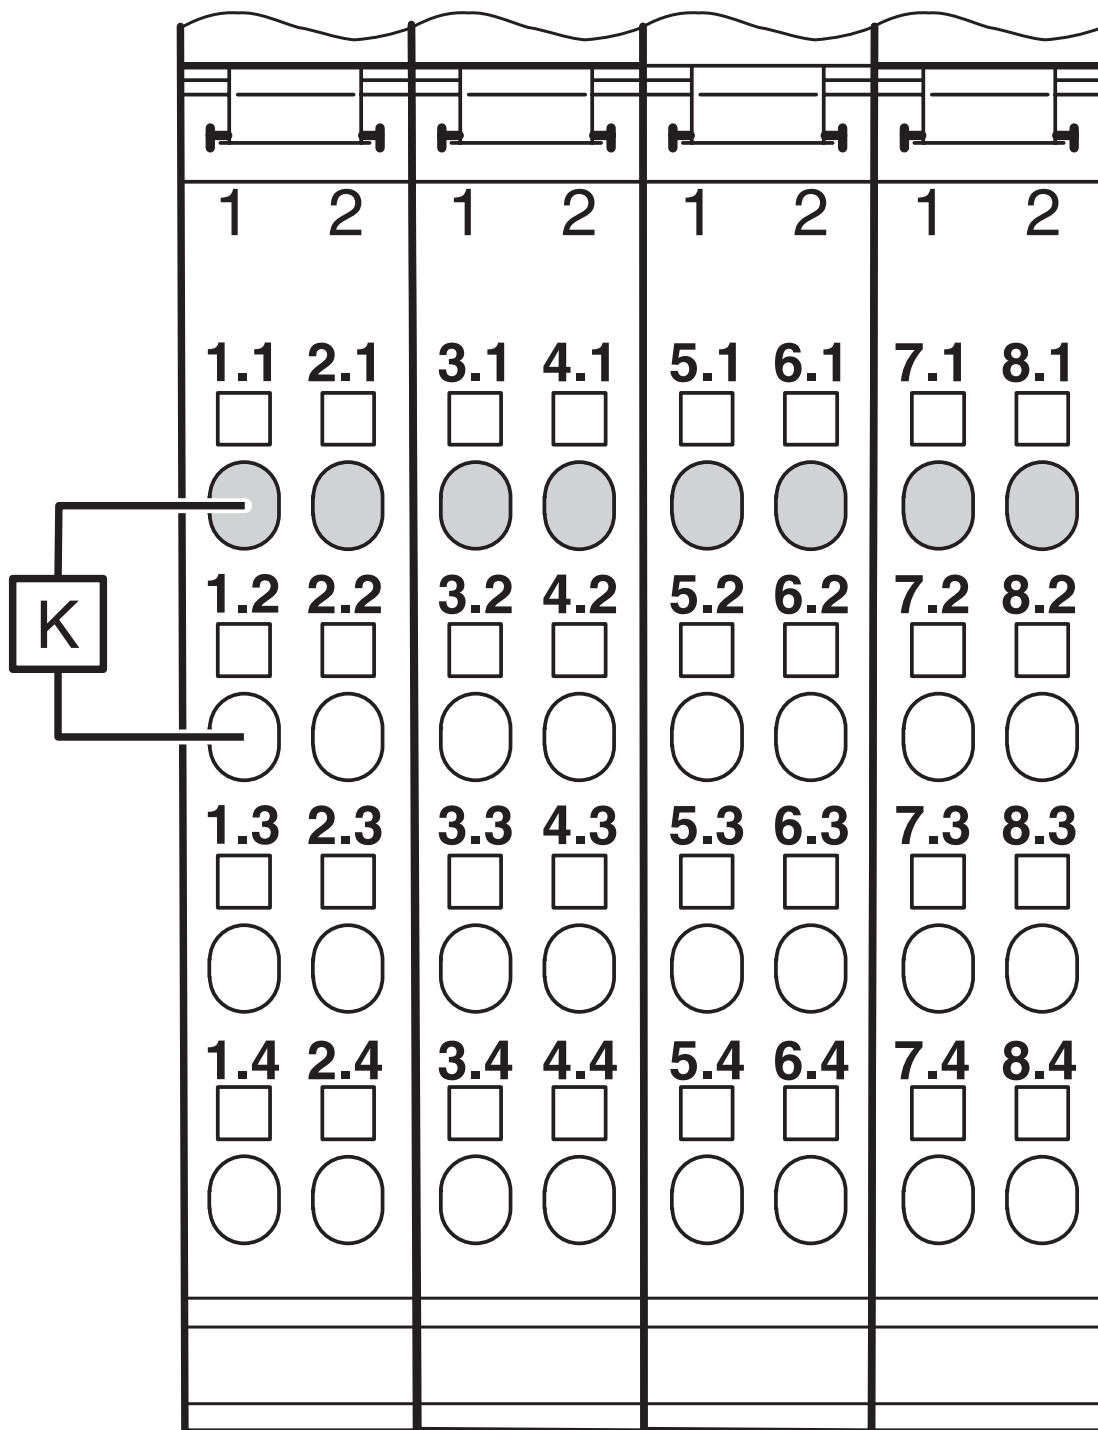

Example connection of a contactor


IB IL 24 PSDO 4/4-PAC - Safety module



2916493

<https://www.phoenixcontact.com/us/products/2916493>

Dimensional drawing

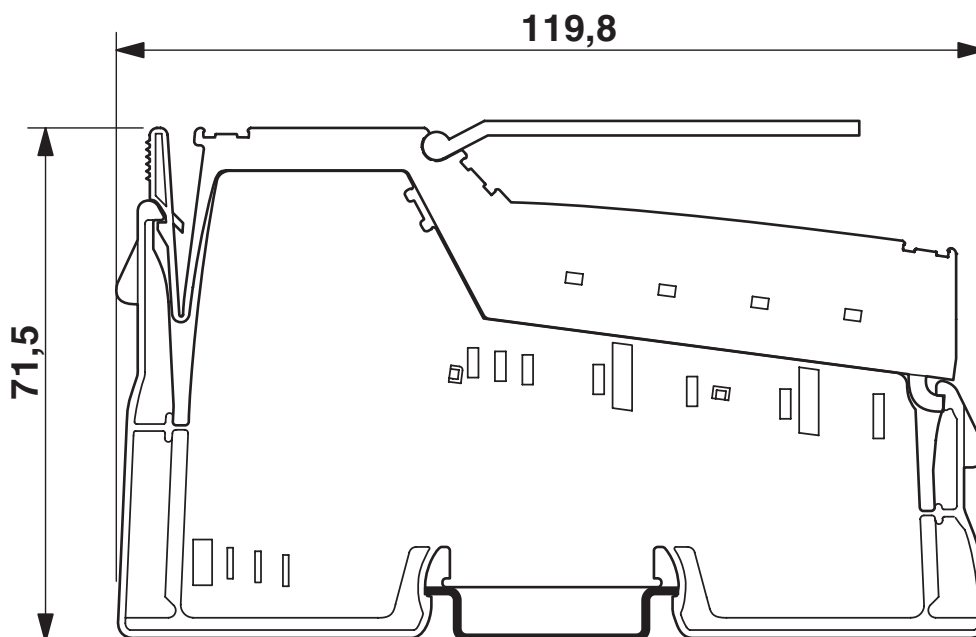

Dimensions (in mm)

IB IL 24 PSDO 4/4-PAC - Safety module



2916493

<https://www.phoenixcontact.com/us/products/2916493>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2916493>



UL Listed

Approval ID: FILE E 140324



cUL Listed

Approval ID: FILE E 140324

Functional Safety

Approval ID: BB 60019880-9883 001



Functional Safety

Approval ID: 968/FSP 2449.00/22

PROFIsafe

Approval ID: Z20080

PROFIsafe

Approval ID: Z20208



Functional Safety

Approval ID: 968/EZ 650.04/20



Functional Safety

Approval ID: 968/EZ 650.04/20

cULus Listed

IB IL 24 PSDO 4/4-PAC - Safety module



2916493

<https://www.phoenixcontact.com/us/products/2916493>

Classifications

ECLASS

ECLASS-11.0	27242604
ECLASS-12.0	27242604
ECLASS-13.0	27242604

ETIM

ETIM 8.0	EC001599
----------	----------

UNSPSC

UNSPSC 21.0	32151600
-------------	----------

IB IL 24 PSDO 4/4-PAC - Safety module



2916493

<https://www.phoenixcontact.com/us/products/2916493>

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

IB IL 24 PSDO 4/4-PAC - Safety module

2916493

<https://www.phoenixcontact.com/us/products/2916493>



Accessories

IB IL 24 SDO 4/4-PLSET/CP - Connector set

2916053

<https://www.phoenixcontact.com/us/products/2916053>

Connector set (yellow), color coded, for safe SDO 4/4 boards.



IB IL FIELD 2 - Marking field

2727501

<https://www.phoenixcontact.com/us/products/2727501>

Marking field, width: 12.2 mm



IB IL 24 PSDO 4/4-PAC - Safety module

2916493

<https://www.phoenixcontact.com/us/products/2916493>



IB IL FIELD 8 - Marking field

2727515

<https://www.phoenixcontact.com/us/products/2727515>

Marking field, width: 48.8□mm



ESL 62X10 - Insert strip

0809492

<https://www.phoenixcontact.com/us/products/0809492>

Insert strip, Sheet, white, unlabeled, can be labeled with: Office printing systems, CMS-P1-PLOTTER, mounting type: insert, lettering field size: 62 x 10 mm, Number of individual labels: 72



IB IL 24 PSDO 4/4-PAC - Safety module

2916493

<https://www.phoenixcontact.com/us/products/2916493>



ESL 62X46 - Insert strip

0809502

<https://www.phoenixcontact.com/us/products/0809502>

Insert strip, Sheet, white, unlabeled, can be labeled with: Office printing systems, CMS-P1-PLOTTER, mounting type: insert, lettering field size: 62 x 46 mm, Number of individual labels: 15



PSR-FTB/20/86 - Filter terminal block

2904477

<https://www.phoenixcontact.com/us/products/2904477>

Terminal block for filtering test pulses from safe semiconductor outputs with adjustable filter values (20 μ F/86 μ F), as well as for EMC filtering of 24 V signals up to an amperage of 2 A.



IB IL 24 PSDO 4/4-PAC - Safety module

2916493

<https://www.phoenixcontact.com/us/products/2916493>



PSR-FTB/1.5/11.5 - Filter terminal block

2904476

<https://www.phoenixcontact.com/us/products/2904476>



Terminal block for filtering test pulses from safe semiconductor outputs with adjustable filter values (1.5 μ F/11.5 μ F), as well as for EMC filtering of 24 V signals up to an amperage of 2 A.

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com