


T-3 1/4 Wedge Base

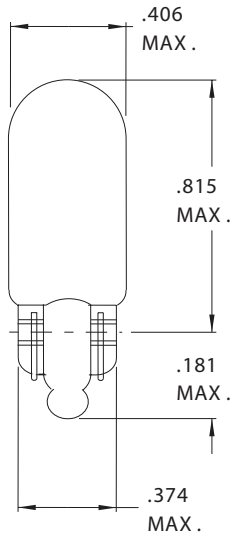

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM559 | 1.38 | .56 | .33 | 50 | S-2 |
| CM127 | 2.47 | .25 | .45 | 30 | C-2R |
| CM285 | 5.00 | .09 | .25 | 1,500 | C-2R |
| CM740 | 5.00 | .07 | .19 | 1,500 | C-6 |
| CM820 | 6.00 | .14 | .35 | 1,200 | C-2V |
| CM159 | 6.30 | .15 | .34 | 5,000 | C-2R |
| CM259 | 6.30 | .25 | .65 | 5,000 | C-2R |
| CM444 | 6.30 | .25 | .90 | 3,000 | C-2V |
| CM447 | 6.30 | .15 | .52 | 1,500 | C-2V |
| CM555 | 6.30 | .25 | .90 | 3,000 | C-2R |
| CM147 | 7.00 | .43 | 2.0 | 1,500 | C-2R |
| CM190 | 7.00 | .34 | .30 | 25,000 | C-2F |
| CM947 | 9.84 | .50 | 4.0 | 200 | C-2R |
| CM280 | 10.0 | .13 | .85 | 250 | C-2V |
| CM3-501 | 12.0 | .42 | 2.6 | 1,000 | C-2R |
| CM3-504 | 12.0 | .25 | 1.11 | 4,000 | C-2V |
| CM3-509 | 12.0 | .17 | .80 | 4,000 | C-2V |
| CM192 | 13.0 | .33 | 3.0 | 1,000 | C-2V |
| CM124 | 14.0 | .27 | 1.5 | 5,000 | C-2F |
| CM158 | 14.0 | .24 | 2.0 | 500 | C-2V |
| CM161 | 14.0 | .19 | 1.0 | 1,500 | C-2F |
| CM168 | 14.0 | .35 | 3.0 | 1,500 | C-2F |
| CM193 | 14.0 | .33 | 2.0 | 5,000 | C-2F |
| CM194 | 14.0 | .27 | 2.0 | 1,500 | C-2F |
| CM658 | 14.0 | .08 | .31 | 15,000 | C-2F |
| CM184 | 14.4 | .24 | 1.0 | 5,000 | C-2F |
| CM3-505 | 24.0 | .13 | 1.0 | 5,000 | C-2F |
| CM3-507 | 24.0 | .21 | 2.4 | 5,000 | C-2F |
| CM152 | 28.0 | .07 | .85 | 10,000 | C-2F |
| CM400 | 28.0 | .10 | 1.6 | 1,000 | C-2V |
| CM464 | 28.0 | .17 | 3.0 | 1,500 | C-2F |
| CM585 | 28.0 | .04 | .30 | 7,000 | C-2F |
| CM655 | 28.0 | .20 | 3.0 | 7,000 | C-2F |
| CM656 | 28.0 | .06 | .62 | 2,500 | C-2F |
| CM657 | 28.0 | .08 | .62 | 7,500 | C-2F |