

Search Results

- Evaluate
 - FAQ's
- How to Buy
 - Bill of Material
 - Favorite Products List
 - Locate Distributor


Home > Products Overview > Search Results >

Current refinements (click  to remove) Search Tips  Within Results


 Text Search: 'HSTTK09-48-Q'

Your search criteria matched only one product, shown below

HSTTK09-48-Q

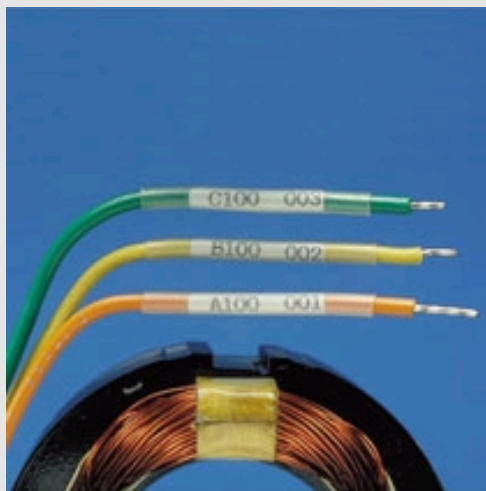

- For dry locations
- Semi-rigid, highly heat resistant
- Offers excellent chemical and abrasion resistance
- Use in high temperature or solvent rich environment
- Semi-rigid highly heat resistant
- Excellent chemical and abrasion resistance
- Meets AMS-DTL-23053/8
- Meets UL224 VW-1 flame retardant

Part Number	HSTTK0948-Q
RoHS Compliance Status	Compliant
Part Description	Semi-rigid heat resistant Kynar* Heat Shrink offers excellent chemical resistance in solvent rich environments.
Material	Kynar*
Color	Clear
CSA Certified	Yes
Military Specification	AMS-DTL-23053/8
UL Recognized	E122770
Length (ft.)	4
Length (m)	1.2
Flammability Rating	UL224 VW-1
Max. Recovered I.D. (In.)	.046
Max. Recovered I.D. (mm)	1.2
Min. Expanded I.D. (In.)	.093
Min. Expanded I.D. (mm)	2.4
Nominal Diameter (In.)	.093
Nominal Diameter (mm)	2.4
Nominal Recovered Wall Thickness (In.)	.010
Nominal Recovered Wall Thickness (mm)	0.3
Pricing Description	Heat Shrink Thin Kynar* .09"(2.4mm) Dia
Shrink Ratio	2:1
Temperature Range	-67°F to 347°F (-55°C to 175°C)
Min. Order UOM	PC
Min. Order Qty.	25
BOM Qty. (# of Pkgs.)	<input type="text" value="0"/>
Add to Favorite Product List	

Please [register](#) to utilize the 'Bill of Materials', 'Submit Quotes' and 'Favorite Product List' features.