

You are here: [Products](#) » [Connectors f.con](#) » [PCB connectors](#) » [Male headers](#) » [SL LP 6 SMD ...](#) »

[SL LP 6 SMD 051](#)



▶ Heatsinks f.cool

▶ Cases f.case

▼ **Connectors f.con**

▶ Sockets

▼ PCB connectors

■ **Male headers**

■ Female headers

■ Direct female connector

■ Jumpers

▶ IDC-connectors

▶ D-Sub connectors

■ Brackets for PC

▶ Optoelectronics


Male headers

SL LP 6 SMD ...

SL LP 6 SMD 051 26 G B SM

□ 0.635 mm, low profile

add to request 

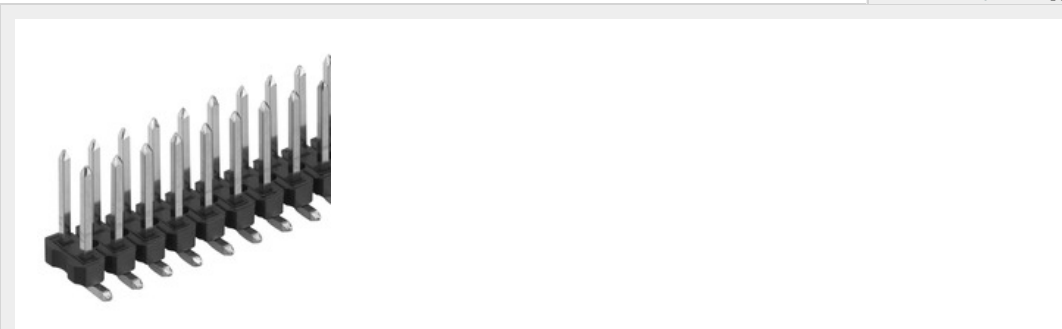

Features Technical Drawing Equipping Variants Accessories / related products

no. of contacts	26
contact material	CuSn alloy
surface contact / contact sleeve	Ni+min.0.2µm Au Ni + 4 ... 6 µm Sn
surface of contact	gold-plated
volume resistivity	≤5 mΩ
nominal current	3 A
nominal voltage	250 VAC
test voltage	2000 V
material isolation body	PA4.6, GF
temperature range	-40 °C ... +163 °C (260 °C / 10 s)
class of flammability	UL 94 V-0
insulation resistance	>10 ¹² Ω
connection type	SMD
version	female header
positioning	locating pin (2 pcs/bar bigger than 6 contacts)
reflow solderable	yes
packing	pick and place pad and bar magazine