

SACC-EC-MS-8CON-M16/0,5 SCO - Device connector front mounting



1523502

<https://www.phoenixcontact.com/us/products/1523502>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Device connector front mounting, Universal, 8-position, Flush-type male connector, straight, M12-SPEEDCON, coding: A , on free cable end, Front mounting, M16 x 1.5, Individual wires, cable length: 0.5 m, 0.25 mm², TPE litz wire, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1239881

Your advantages

- Preassembled with litz wires for immediate use
- Customer-specific assemblies and litz wire lengths available
- Sealed on the litz wire side for optimum leak-tightness
- All standard pin assignments and codings for signal, data, and power transmission with a uniform design-in design
- For high transmission safety: shield connection to the housing with optional EMC nut
- SPEEDCON fast locking system reduces cabling times

Commercial Data

Item number	1523502
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	AB24
Product Key	ABQCEB
Catalog Page	Page 38 (C-2-2019)
GTIN	4046356021333
Weight per Piece (including packing)	29.1 g
Weight per Piece (excluding packing)	29.1 g
Customs tariff number	85444290
Country of origin	DE

SACC-EC-MS-8CON-M16/0,5 SCO - Device connector front mounting



1523502

<https://www.phoenixcontact.com/us/products/1523502>

Technical Data

Notes

General	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
General	Lock nut is included in the scope of delivery

Mounting

Mounting type	Front mounting M16 x 1.5 With locking nut
Assembly instructions	With locking nut
Connection method	Individual wires

Product properties

Product type	Circular connectors (device side)
Sensor type	Universal
Number of positions	8
Application	Signal
No. of cable outlets	1
Shielded	no
Coding	A

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	V0
Seal material	NBR
Material of grip body	Zinc die-cast, nickel-plated
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PA 6.6
Material for screw connection	Zinc die-cast, nickel-plated
Conductor material	Tin-plated Cu litz wires

Electrical properties

Rated surge voltage	0.8 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U _N	30 V (AC)

SACC-EC-MS-8CON-M16/0,5 SCO - Device connector front mounting



1523502

<https://www.phoenixcontact.com/us/products/1523502>

	30 V (DC)
Nominal current I_N	2 A
Max. conductor resistance	80 mΩ/m

Connection data

Conductor connection

Connection method	Individual wires
Contact connection type	Crimp contacts
Conductor cross section	0.25 mm ²
Tightening torque	3 Nm 4 Nm

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

Connector

Connection 1

Head design	Flush-type male connector
Head cable outlet	straight
Head thread type	M12
Head locking type	SPEEDCON
Coding	A

Connection 2

Head design	free cable end
-------------	----------------

Cable/line

Cable length	0.5 m
Cable type	TPE litz wire
Signal type/category	Universal
Wire diameter incl. insulation	1.15 mm ±0.07 mm
Single wire, color	brown, blue, white, gray, pink, green, yellow, red
Conductor material	Tin-plated Cu litz wires
Conductor structure signal line	14x 0.15 mm
AWG signal line	24
Material wire insulation	TPE
Thickness, insulation	0.21 mm (Core insulation)
Nominal voltage, cable	300 V
Test voltage, cable	2000 V AC
Cable resistance	≤ 80 mΩ/m
Cable insulation resistance	≥ 20 MΩ*km

SACC-EC-MS-8CON-M16/0,5 SCO - Device connector front mounting



1523502

<https://www.phoenixcontact.com/us/products/1523502>

Ambient temperature (operation)	-40 °C ... 85 °C (cable, fixed installation)
	-25 °C ... 85 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
	IP67
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)
	-40 °C ... 85 °C (without mechanical actuation)
	-25 °C ... 85 °C (Cable, flexible installation)
	-40 °C ... 85 °C (cable, fixed installation)

Standards and regulations

M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101

SACC-EC-MS-8CON-M16/0,5 SCO - Device connector front mounting




1523502

<https://www.phoenixcontact.com/us/products/1523502>


Drawings

Schematic diagram

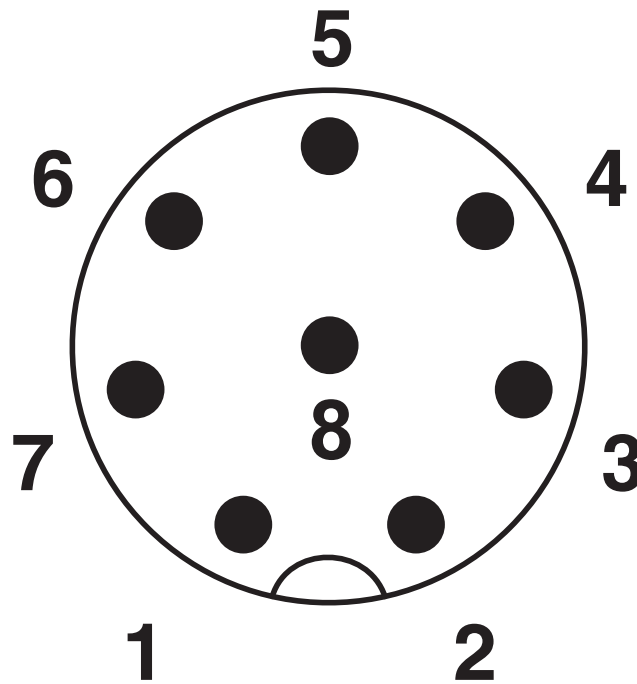

Pin assignment M12 plug, 8-pos., view plug side

Circuit diagram

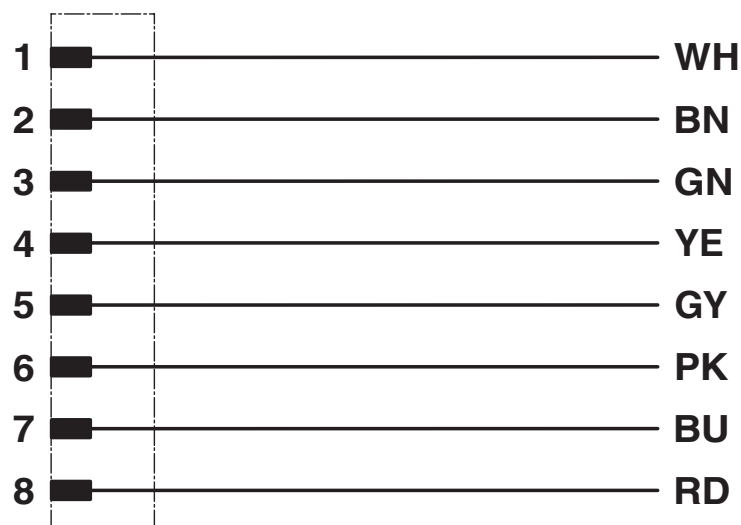


SACC-EC-MS-8CON-M16/0,5 SCO - Device connector front mounting



1523502

<https://www.phoenixcontact.com/us/products/1523502>

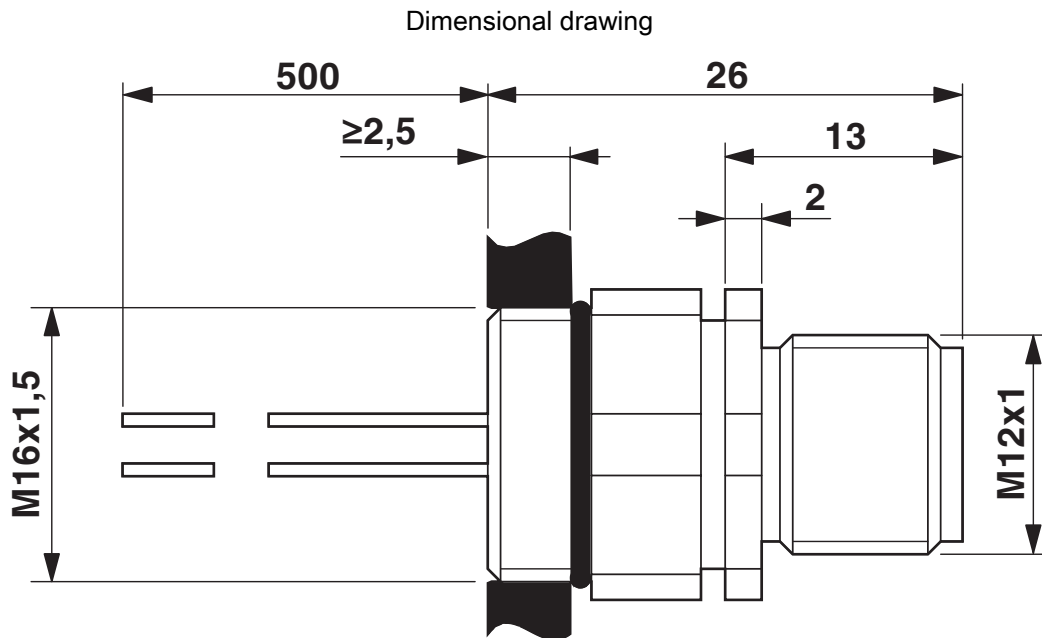

Dimensional drawing

SACC-EC-MS-8CON-M16/0,5 SCO - Device connector front mounting





1523502

<https://www.phoenixcontact.com/us/products/1523502>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1523502>

 UL Recognized Approval ID: E118976-20100522	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	30 V	2 A	- 24	-

 EAC Approval ID: B.01687
--

 cULus Recognized Approval ID: E221474-20140616	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	30 V	2 A	24 - 22	-

SACC-EC-MS-8CON-M16/0,5 SCO - Device connector front mounting



1523502

<https://www.phoenixcontact.com/us/products/1523502>

Classifications

ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

ETIM

ETIM 8.0	EC002635
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

SACC-EC-MS-8CON-M16/0,5 SCO - Device connector front mounting



1523502

<https://www.phoenixcontact.com/us/products/1523502>

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

SACC-EC-MS-8CON-M16/0,5 SCO - Device connector front mounting



1523502

<https://www.phoenixcontact.com/us/products/1523502>

Accessories

SACC-M16-SEAL CLM - Flat gasket

1430394

<https://www.phoenixcontact.com/us/products/1430394>

M16 flat gasket for M12 flush-type connectors with M16 fastening thread



PROT-M12 FS - Sealing cap

1560251

<https://www.phoenixcontact.com/us/products/1560251>

M12 sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field



SACC-EC-MS-8CON-M16/0,5 SCO - Device connector front mounting



1523502

<https://www.phoenixcontact.com/us/products/1523502>

PROT-M12 FS-M - Sealing cap

1430488

<https://www.phoenixcontact.com/us/products/1430488>



M12 metal sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com