


[Wire And Cable Products](#) > [Twisted Pair Cable](#)

# 44AM1121-20-9/96-9

44AM1121-20-9/96-9

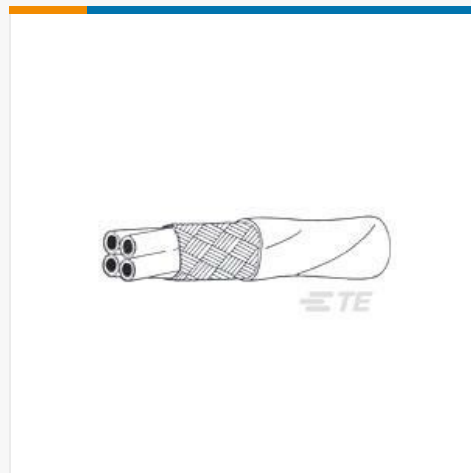

Raychem

TE Internal #: **306091-001**

TE Internal Description: **44AM1121-20-9/96-9**

Alias #: **8-1192317-4**

Cable Type : **Spec 44**

Voltage Rating (VAC): **600**

Insulation Material : **Modified Radiation Cross-linked PVDF**

Conductor Material : **Tin-Coated Copper**

Wire Size (AWG): **20**

[Similar Products](#) | [Digital Datasheet](#)

**ORDER SAMPLES**

**Compatible Parts & Tooling**

**Purchase items directly from TE.com**

**We are here to help!**  
Get in touch with our product experts.

**CHAT WITH US**

**EMAIL US**

**CALL US**

Documents	Features	Product Compliance
Product Drawings	<p>TWO CONDUCTOR CABLE, RADIATION-CROSSLINKED, POLYALKENE-INSULATED, SHIELDED, JACKETED, LIGHTWEIGHT, GENERAL PURPOSE, 600 VOLT</p> <p>tif English</p> <p>44AM1121-20-9/96-9</p> <p><a href="#">44AM1121-20-9/96-9</a> English</p>	
Datasheets & Catalog Pages	<p>1654025_Sec9_SPEC44</p> <p><a href="#">ENG_CS_1654025_Sec9_SPEC44_0313.pdf</a></p> <p>English</p>	
Product Specifications	<p>Product Specification</p> <p><a href="#">ENG_SS_SPEC44_5.pdf</a> English</p>	
<p>Please review product documents or <a href="#">contact us</a> for the latest agency approval information. Please Note: Use the Product Drawing for all design activity.</p>		
Product Type Features	<p>Cable Type : <b>Spec 44</b></p>	
Electrical Characteristics	<p>Voltage Rating (VAC): <b>600</b></p>	

Body Features	Insulation Material : <b>Modified Radiation Cross-linked PVDF</b> Conductor Material : <b>Tin-Coated Copper</b>
Dimensions	Wire Size (AWG): <b>20</b>
Usage Conditions	Operating Temperature Range (°C): <b>-65 – 150</b>
Statement of Compliance	<a href="#">Statement of Compliance pdf</a>


## Products with Similar Specs

[View All Similar Products](#)

### THIS PRODUCT

### TOP RESULTS [?](#)

TWISTED PAIR CABLE  
**44AM1121-20-9/96-9**  
 44AM1121-20-9/96-9




**Non-Stocked**

---

Cable Type : **Spec 44**  
 Voltage Rating : **600 VAC**  
 Insulation Material : **Modified Radiation Cross-linked PVDF**  
 Conductor Material : **Tin-Coated Copper**  
 Wire Size : **20 AWG**

TWISTED PAIR CABLE  
**44AM1121-20-6/9-9**  
 44AM1121-20-6/9-9




**Non-Stocked**

---

Cable Type : **Spec 44**  
 Voltage Rating : **600 VAC**  
 Insulation Material : **Modified Radiation Cross-linked PVDF**  
 Conductor Material : **Tin-Coated Copper**  
 Wire Size : **20 AWG**

TWISTED PAIR CABLE  
**44AM1121-20-0/9-9**  
 44AM1121-20-0/9-9




**In-Stock**

---

Cable Type : **Spec 44**  
 Voltage Rating : **600 VAC**  
 Insulation Material : **Modified Radiation Cross-linked PVDF**  
 Conductor Material : **Tin-Coated Copper**  
 Wire Size : **20 AWG**

TWISTED PAIR CABLE  
**44AM1121-20-9/96-9CS2275**  
 44AM1121-20-9/96-9CS2275



From **In-Stock**

---

Cable Type : **MIL-DTL-27500**  
 Voltage Rating : **600 VAC**  
 Insulation Material : **Modified Radiation Cross-linked PVDF**  
 Conductor Material : **Tin-Coated Copper**  
 Wire Size : **20 AWG**

[ABOUT TE CONNECTIVITY](#)

[FOR PARTNERS](#)

[SUPPORT](#)

[CALL US](#)

[LIVE CHAT](#)

[UNITED STATES \(EN\)](#)