




SINGLE-BOARD  
COMPUTER

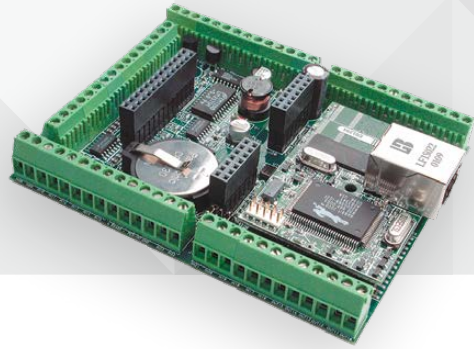

# DIGI RABBIT SBC BL2100 SERIES

A high-performance single-board computer designed for medium-scale industrial control and monitoring applications


The BL2100 series is available in four flexible configurations, which feature 40 digital I/O, 3 RS-232/485 serial ports, and a battery-backup for the real-time clock and SRAM for protected data. In addition, the BL2100 and BL2120 models include 11 channels of 12-bit resolution A/D input and 4 channels of 12-bit D/A output. The BL2100's 16 digital outputs can sink/source up to 200 mA and are configurable in Dynamic C, an easy-to-use C environment.

An optional 7-key 122 x 32 graphic display is available as a cost-effective user interface (a panel-mount, water-resistant NEMA 4 version is also available). The BL2100 boards come standard with screw terminals which, can support 14 AWG wiring or other options such as IDC or friction lock headers.

## FEATURES AND BENEFITS

- 40 sinking/sourcing digital I/O
- Up to 512K Flash for program and up to 512K SRAM for data
- 16 digital outputs which can sink/source 200 mA
- 11 A/D and 4 D/A with 12-bit resolution
- Up to 4 serial ports: two 3-wire (or one 5-wire) RS-232 and 1 RS-485
- Royalty-free TCP/IP stack

## APPLICATION EXAMPLE

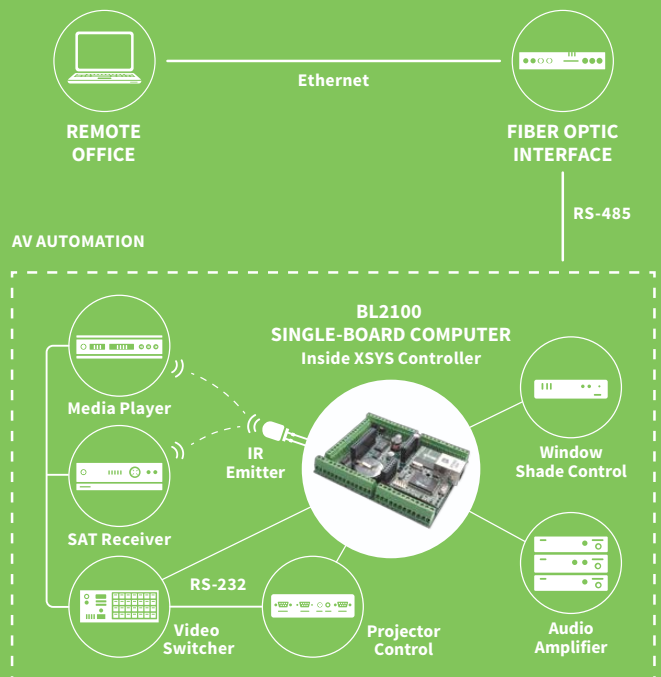

## RELATED PRODUCTS



SPECIFICATIONS	BL2110		BL2120	BL2130
<b>FEATURES</b>				
<b>MICROPROCESSOR</b>	Rabbit 2000 at 22.1 MHz			
<b>ETHERNET PORT</b>	10Base-T, RJ-45, link and activity LEDs	None		
<b>FLASH</b>	256K (standard)	256K		
<b>SRAM</b>	128K (standard)	128K		
<b>BACKUP BATTERY</b>	Socketed 3V lithium coin-type, 265 mA.h, supports RTC and SRAM			
<b>KEYPAD/DISPLAY</b>	See keypad/display option (below) and our "OP" products (for serial display options)			
<b>DIGITAL INPUTS</b>	24: protected to $\pm 36$ VDC			
<b>DIGITAL OUTPUTS</b>	16: source/sink 200 mA each, 36VDC max.			
<b>ANALOG INPUTS</b>	None	11 at 1 M $\Omega$ , 12-bit resolution, $\pm 10$ VDC, up to 4,100 samples/sec.	None	
<b>ANALOG OUTPUTS</b>	None	Four 12-bit resolution, 0-10 VDC*, update rate 12 kHz	None	
<b>SERIAL PORTS</b>	4 total: two 3-wire (or one 5-wire) RS-232, 1 RS-485, and one 5V CMOS-compatible (programming)			
<b>SERIAL RATE</b>	Max. burst rate = CLK/32; Max. sustained rate = burst/2			
<b>CONNECTORS</b>	Screw terminals support max. 14 AWG/1.5 mm <sup>2</sup> (standard)			
<b>REAL-TIME CLOCK</b>	Yes			
<b>TIMERS</b>	Five 8-bit timers (four cascadable from the first) and one 10-bit timer with 2 match registers			
<b>WATCHDOG TIMER/SUPERVISOR</b>	Yes			
<b>POWER</b>	9-36 VDC, 1.5W max. (without display), 3W max. (with display)			
<b>OPERATING TEMPERATURE</b>	-40° C to +70° C			
<b>HUMIDITY</b>	5-95%, non-condensing			
<b>BOARD SIZE</b>	4.14" x 3.41" x 0.93"; (105 mm x 87 mm x 24 mm)			
<b>PRODUCT WARRANTY</b>	1 year			

SPECIFICATIONS	Keypad/Display Option	
<b>FEATURES</b>		
<b>LCD PANEL</b>	122 x 32 graphic LCD in two stacked sections (with programmable backlight); Relegendable keypad with 7-key/7-LED interface	
<b>LEDS</b>	7 user-programmable: 1 red, 4 green, 2 yellow	
<b>OPERATING TEMPERATURE</b>	0° C to 50° C	
<b>BOARD SIZE</b>	3.00" x 2.6" x 0.75"; (76 mm x 66 mm x 19 mm)	
<b>ENCLOSURE SIZE</b>	5.60" x 4.875" x 1.5"; (142 mm x 124 mm x 38 mm)	

PART NUMBERS	DESCRIPTION
20-101-0462	BL2110. Ethernet, no Analog
20-101-0463	BL2120. Analog, no Ethernet
20-101-0464	BL2130. No Analog, no Ethernet
20-101-0502	Keypad/Display Option

**DIGI SERVICE AND SUPPORT** / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2019 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91001660  
C3/319

**DIGI INTERNATIONAL WORLDWIDE HQ**  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

**DIGI INTERNATIONAL GERMANY**  
+49-89-540-428-0

**DIGI INTERNATIONAL JAPAN**  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

**DIGI INTERNATIONAL SINGAPORE**  
+65-6213-5380

**DIGI INTERNATIONAL CHINA**  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)

