# **Slide Potentiometer**

# Model PSxxG

### Features:

- With/without dust cover
- Stable sliding force
- 200,000 cycle life
- Metal lever
- RoHS compliant





| Model Styles Available  |       |  |
|-------------------------|-------|--|
| Dual Gang , 45mm Travel | PS45G |  |
| Dual Gang , 60mm Travel | PS60G |  |

## Electrical

| Resistance Range, Ohms         | 10K -1M                                       |
|--------------------------------|---|
| Standard Resistance Tolerance  | ± 20%   |
| Resistance Tapers              | A,B,C   |
| Residual Resistance            | Less than 1.0 ohms                            |
| Input Voltage, Maximum         | 300Vdc  |
| Power rating, Watts            | Linear B taper: 0.25W<br>Other tapers: 0.125W |
| Dielectric Strength            | 300Vac, 1 minute                              |
| Insulation Resistance, Minimum | 10M ohms at 250Vdc/ 1 minute                  |
| Sliding Noise                  | Less than 100mV                               |
| Gang Error                     | ±3dB (-40dB to 0dB)                           |

## Mechanical

| Static Stop Strength, Minimum | 5.0 Kgf/cm |
|-------------------------------|------------|
| Operating Force               | 50gf max.  |

## Durability

Sliding Life


200,000 cycles

General Note TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

# **Slide Potentiometer**


# Model PSxxG



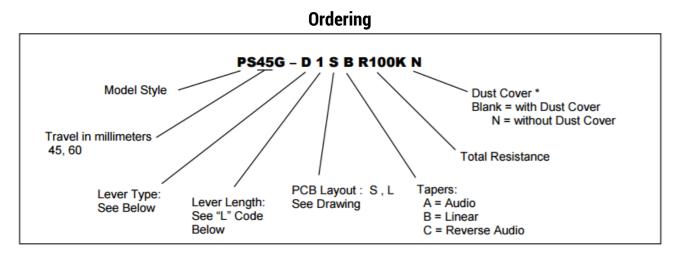



### Lever Types & Length

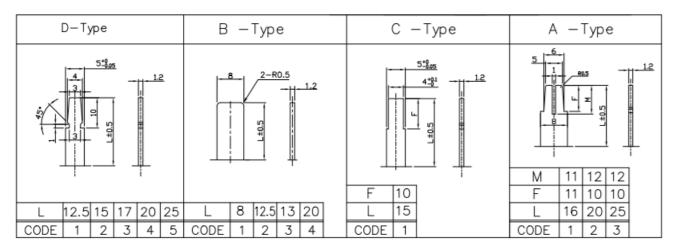

#### \* Dust Cover option not offered for levers less than 10 mm in length

# **Slide Potentiometer**






Without Dust Cover


Without Dust Cover

## **Outline Drawings**

### PS45G with L type PCB LAYOUT

### With Dust Cover

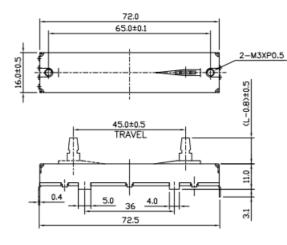

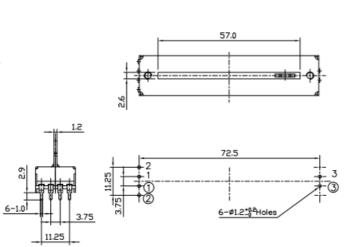

#### PS45G with S type PCS LAYOUT

#### With Dust Cover

72.0 65.0±0.1 57.0 2-M3XP0.5 16.0±0.5 œ Ð (L-0.8)±0.5 9 G 1.2 45.0±0.5 TRAVEL 67.5 3 11.0 3 5.0 4.0 6-1.0 6-ø1.2<sup>+02</sup>Holes 0.4 3.75 36 3.1 11.25 67.5

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | BI Technologies 413 Rood RD, Suite 7 Calexico, CA 92231 Ph: +1 714 447 2345 www.ttelectronics.com/bi-technologies Model PSxxG




Without Dust Cover

Without Dust Cover

## **Outline Drawings**


### PS60G with L type PCB LAYOUT

### With Dust Cover

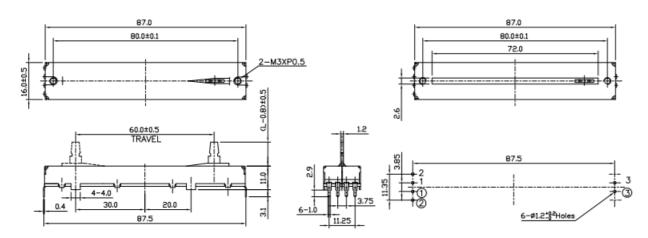


### PS60G with S type PCB LAYOUT

#### With Dust Cover

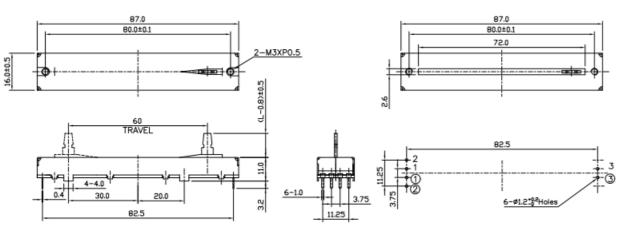

Circuit Diagram PSxxG Dual Gang



General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | BI Technologies 413 Rood RD, Suite 7 Calexico, CA 92231 Ph: +1 714 447 2345 www.ttelectronics.com/bi-technologies