




+ HARNESING

HEAT SHRINK BOOTS

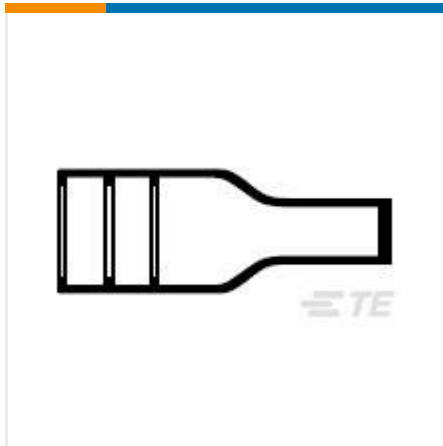

✓ Active

TE CONNECTIVITY (TE)

202D132-3/86-0

Raychem | CAP , CRPS

202D132-3/86-0

TE Internal Number: 703870-000

Alias ID: 1195522-1

EU RoHS Compliant

EU ELV Compliant

Lipped Yes

Operating Temperature Range (°C) -55 – 105

Fluid/Chemical Resistance Suitable for occasional exposure to fluids

Adhesive Options /86 Precoat, -55 – 105°C (-67 – 221°F)

Material Systems Code 10

↓ PRODUCT DRAWING
English

DOCUMENTATION

Product Drawings

Boot, Straight, With Lips

PDF

English

Product Specifications

Product Specification

Thermofit Polyolefin Molded Components Flame-Retarded, Semi-Rigid, Heat-Shrinkable

PDF

English

FEATURES



Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

Molded Part Type Molded Boot

Configuration Features

Lipped Yes

Body Features

Material Systems Code 10

Adhesive Pre-Coat Yes

Entry Size (Braided or Magneform Adapter) 10, 6, 7, 8, 9

Entry Size (Solid or Fixed Adapter) 4 – 6

Material Modified Polyolefin

Entry Size (Tinel-Lock Adapter) 10, 12, 5, 6, 7, 8

Entry Size (Spin Coupling Adapter) 6 – 12

Dimensions

Cable Diameter Range 6.6 – 14.7 mm [.26 – .579 in]

Wire/Cable Outside Diameter .3 in, .31 in, .35 in, .39 in, .43 in, .433 in, .47 in, 10 mm, 11 mm, 12 mm, 8 mm, 9 mm

Usage Conditions

Operating Temperature Range (°C) -55 – 105

Operation/Application

Power Cable Accessory No

Industry Standards

Government Qualified No

Approved Standards BS-G-198-5-DA, DEF Std 59-97 Issue 3 Type DA, SAE AS I 81765/1, Type I, UL 224, File E85381

Other

Fluid/Chemical Resistance Suitable for occasional exposure to fluids

Adhesive Options /86 Precoat, -55 – 105°C (-67 – 221°F)

Adhesive Type High Performance Pre-Coat Adhesive

Statement of Compliance

Statement of Compliance

PDF
