




CONNECTOR HOUSINGS

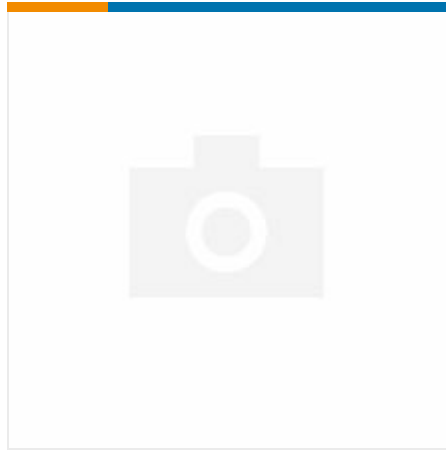

TE CONNECTIVITY (TE) POWER DBL LOCK CAP HSG P/M 4P(GWT)

Power-Signal Double Lock | Power Double Lock

5-177908-1
 TE Internal Number: 5-177908-1

Always EU RoHS/ELV Compliant

Connector System **Wire-to-Panel, Wire-to-Wire**

Centerline **3.96 mm [.156 in]**

Row-to-Row Spacing **4.6 mm [.181 in]**

Number of Positions **4**

Number of Rows **2**

✓ Active

↓ **PRODUCT DRAWING**
 English

Product Drawings

[AMP POWER DBL LOCK CONN, 3.96mm PITCH CAP HOUSING 4 Pos \(PANEL MOUNT\)](#)

PDF
English

Please review product documents or [contact us](#) for the latest agency approval information. Please Note: Use the Product Drawing for all design activity.

Product Type Features

Connector System	Wire-to-Panel, Wire-to-Wire
Row-to-Row Spacing	4.6 mm [.181 in]
Connector Style	Receptacle
Sealed	No
Applies To	Panel, Wire/Cable
Product Type	Connector
Connector Type	Housing

Configuration Features

Number of Positions	4
Number of Rows	2
Selectively Loaded	No
Preloaded	No

Electrical Characteristics	Operating Voltage (VAC)	300
Body Features	Sealable	No
Contact Features	Contact Type	Tab
	Shunts/Shorting Bars	Without
	Multiple Contact Types	Without
Mechanical Attachment	Contact Retention	Without
Housing Features	Centerline	3.96 mm [.156 in]
	Housing Material	Nylon 6/6
	Housing Color	Natural
Dimensions	Height	26.1 mm [1.02 in]
	Width (mm)	13.2
Usage Conditions	Operating Temperature Range	-30 – 105 °C [-22 – 221 °F]
Operation/Application	Assembly Integration Feature	Without
Identification Marking	Circuit Identification Feature	Without
Industry Standards	CSA Rating	Certified
	CSA File Number	LR7189
	UL Rating	Recognized
	CSA Certified	Yes
	VDE Tested	Yes
	UL File Number	E28476
Packaging Features	Packaging Quantity	150
	Packaging Method	Bag
Product Compliance	Statement of Compliance PDF VIEW ALL PRODUCT COMPLIANCE	

