


Specification Sheet

Part Number: IT50RT9K2

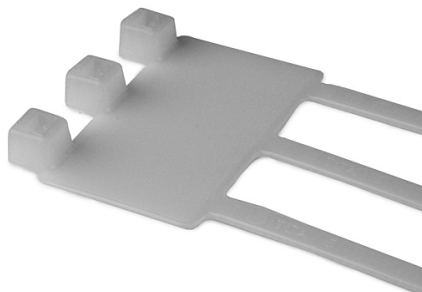

Identification Tie, 8" Long, 50lb Tensile Strength, PA66, Natural, 50/pkg

Article Number 111-85119

Type IT50RT

Color Natural (NA)

Features & Benefits

- Identification plate feature allows bundles to be easily marked and identified.
- Wire and cable harnesses can be secured and identified using just one product, which saves time.
- Plates can be marked manually with a permanent marker or with a pre-printed adhesive label.

Quantity Per bag

| | |
|--|---|
| Product Description | Identification Cable Ties feature an identification plate that allows wire and cable bundles to be easily marked and identified. These ties enable wire and cables to be secured and identified using just one product, saving installation time. The plates can be marked using a permanent marker or with a HellermannTyton adhesive label. |
| Short Description | Identification Tie, 8" Long, 50lb Tensile Strength, PA66, Natural, 50/pkg |
| Global Part Name | IT50RT-PA66-NA |
| Minimum Tensile Strength (Imperial) | 50.0 |
| Minimum Tensile Strength (Metric) | 225.0 |
| Length L (Imperial) | 8.0 |
| Length L (Metric) | 203.2 |
| Fixation Method | Others |
| Identification Plate Position | attached to bundle |
| Releasable Closure | No |
| Tie Closure | plastic pawl |
| Variant | Inside Serrated |
| Width W (Imperial) | 1.8 |
| Width W (Metric) | 46.0 |

| | |
|---------------------------------------|----------------------------|
| Bundle Diameter Min (Imperial) | 0.39 |
| Bundle Diameter Min (Metric) | 10.0 |
| Bundle Diameter Max (Imperial) | 1.73 |
| Bundle Diameter Max (Metric) | 44.0 |
| Thickness T (Imperial) | 0.05 |
| Thickness T (Metric) | 1.2 |
| Height H (Imperial) | 1.04 |
| Height H (Metric) | 26.3 |
| Outside Diameter Max(Imperial) | 1.73 |
| Outside Diameter Min (metric) | 10.00 |
| Outside Diameter Min(Imperial) | 0.393 |
| Outside Diameter Max (metric) | 44.00 |
| | |
| Material | Polyamide 6.6 (PA66) |
| Material Shortcut | PA66 |
| | |
| US MIL SPEC | SAE-AS33681 MS3368-4-9D |

| | |
|--|--|
| Flammability | UL 94 V2 |
| Halogen free | Yes |
| Operating Temperature (Metric) | -40°F to +185°F (-40°C to +85°C) |
| Reach Complaint(Article 33) | Yes |
| ROHS Complaint | Yes |
| Certification/Specification WEB | UL ANSI/UL 62275 CAGE Code 53421 UL ANSI/UL 1565 UL ANSI/UL 746B |
| UL Recognized (US) | Yes |
| UL Recognized (US and Canada) | Yes |
| Package Quantity(Imperial) | 50 |
| Package Quantity (Metric) | 50 |
| Customs Number | 3926909988 |
| Content Unit(BMEcat) | pcs. |
| Weight (Metric) | 2.5 |

