

Product Features:

- Low Cost SMD Package
- Low ESR
- Compatible with Leadfree Processing


Applications:

- Fibre Channel
- Server & Storage
- Sonet / SDH
- 802.11 / WiFi
- T1/E1, T3/E3

Electrical Specifications:

Frequency	8MHz to 150MHz
Equivalent Series Resistance	
Fundamental	
8MHz – 9.999999MHz	100 Ohms Maximum
10MHz – 11.999999MHz	80 Ohms Maximum
12MHz – 15.999999MHz	60 Ohms Maximum
16MHz – 19.999999MHz	50 Ohms Maximum
20MHz – 23.999999MHz	40 Ohms Maximum
24MHz – 50MHz	30 Ohms Maximum
Third Overtone	
30MHz – 150MHz	80 Ohms Maximum
Shunt Capacitance (C0)	5pF Maximum
Frequency Tolerance (at 25°C)	±50ppm, ±30ppm, ±25ppm, ±20ppm, ±15ppm, or ±10ppm
Frequency Stability (over Temperature)	±50ppm, ±30ppm, ±25ppm, ±20ppm, ±15ppm, or ±10ppm
Mode of Operation	
8MHz – 50MHz	Fundamental
30MHz – 150MHz	Third Overtone
Crystal Cut	AT Cut
Load Capacitance	8pF to 32pF or Specify
Drive Level	100µW Maximum
Aging	±5ppm/Year Maximum
Operating Temperature Range	See Part Number Guide
Storage Temperature Range	-40°C to +85°C

Mechanical and Solder Pad Dimensions:

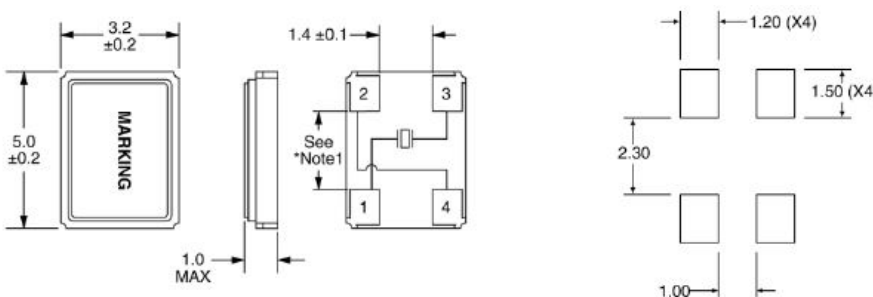


Pin Connections	
Pin 1	Crystal
Pin 2	Cover/Ground
Pin 3	Crystal
Pin 4	Cover/Ground

Dimension Units: mm
 Note: Chamfer not shown
 *Note 1: 2.6±0.1mm (<=10MHz)
 2.4±0.1mm (>10MHz)

Part Number Guide						
Sample Part Number: ILCX07 – FB1F18 – 20.000 MHz						
Package	Frequency Tolerance	Frequency Stability	Operating Temperature Range	Mode of Operations	Load Capacitance	Frequency
ILCX07	B = ±50ppm	B = ±50ppm	0 = 0°C to +50°C	F = Fundamental	8pF to 32pF or Specify	20.000 MHz
	F = ±30ppm	F = ±30ppm	1 = 0°C to +70°C	3 = Third Overtone		
	G = ±25ppm	G = ±25ppm	2 = -10°C to +60°C			
	H = ±20ppm	H = ±20ppm	3 = -20°C to +70°C			
	I = ±15ppm	I = ±15ppm*, **	5 = -40°C to +85°C			
	J = ±10ppm*	J = ±10ppm*, **	9 = -10°C to +50°C			
			D = -10°C to +105°C*			
		E = -40°C to +105°C*				

* Not available at all frequencies. ** Not available for all temperature ranges.

Pb Free Solder Reflow Profile:

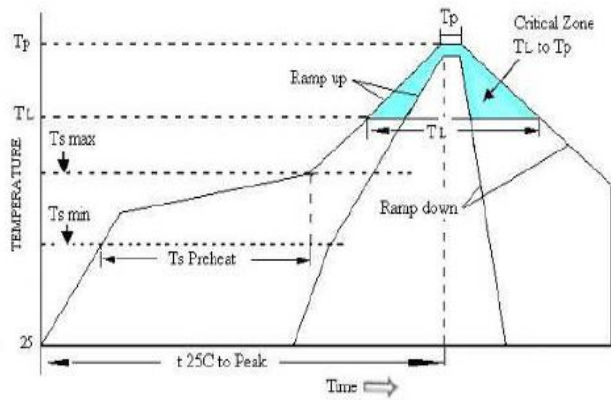


Ts max to TL (Ramp-up Rate)	3°C / second max
Preheat	
Temperature min (Ts min)	150°C
Temperature typ (Ts typ)	175°C
Temperature max (Ts max)	200°C
Time (Ts)	60 to 180 seconds
Ramp-up Rate (TL to Tp)	3°C / second max
Time Maintained Above Temperature (TL)	217°C
Time (TL)	60 to 150 seconds
Peak Temperature (Tp)	260°C max for 10 seconds
Time within 5°C to Peak Temperature (Tp)	20 to 40 seconds
Ramp-down Rate	6°C / second max
Time 25°C to Peak Temperature	8 minutes max

*Units are backward compatible with +240°C reflow processes

Package Information:

MSL = 1 (package does not contain plastic, storage life is unlimited under normal room conditions).
Termination = e4 (Au over Ni over W base metallization).

Tape and Reel Information:

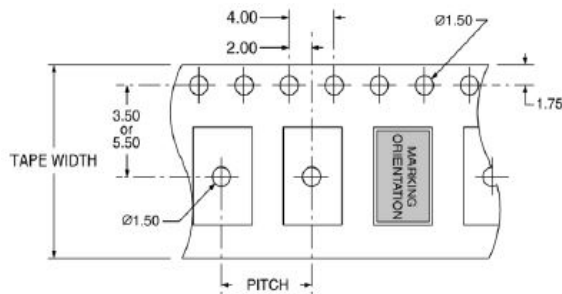

PITCH	8.00
TAPE WIDTH	12.00
REEL DIA	180
QTY PER REEL	1,000

Dimensions Units: mm