


ISOLCOPPER + THERMAL TAPE

Data Sheet DS_63

1/2

STANDARD CONSTRUCTION

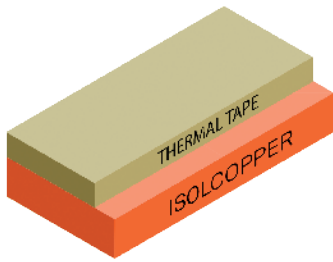


Thermal tape μm (mils)
50 (1,97)

Insulation thickness μm (mils)
80(3.1)

DESCRIPTION

- Aismalibar Isolcopper is an ultra-thin copper clad with an ultra-thin dielectric layer doped with high end mineral content.
- Side A with self-adhesive pressure sensitive adhesive tape TT50 with excellent wettability and conformability to aluminum, copper and FR4 surfaces.
- High Tg : 180°C (DSC)
- Low mounting pressure
- Silicon free
- No need of thermal grease
- Glass free
- Ultra low thermal resistance
- Dielectric strength 2 kV
- CTE expansion XY 17 ppm



UL Approved QMST2
File: E47820
IPC-4101



RoHS 3 / REACH
Last updated compliance directive



Properties	ICU80 HTG 1TT50	UNITS	TOLERANCE	TEST METHOD
Thermal conductivity	2,2 (0,056)	W/mK (W/inK)	+/- 15%	ASTM D5470
Thermal Resistance	0,068	K/W	+/- 15%	ASTM D5470
Thermal impedance @10/30/50 psi	0,584 (0,091)	Kcm ² /W (Kin ² /W)	+/- 15%	ASTM D5470
Nominal thickness (pressed)	130 (5,1)	μm (mils)	+/- 15 μm (0,6mils)	-
Filler Type	Ceramic	-	-	-
Dielectric breakdown voltage, AC	≥ 2	kV	-	IPC TM 650 2.5.6.3
Initial Tack (Peel adhesion)	4,3***	N/cm	-	ASTM D3330
Continuous Working Temperature	130*	°C	-	UL-MOT
Decomposition Temperature (Td) Initial	340*	°C	-	IPC-TM 650-2.3.41
Decomposition Temperature (Td) 5% loss	420*	°C	-	IPC-TM 650-2.3.41
Glass transition temperature of dielectric layer (by DSC)	180*	°C	-	IPC-TM 650-2.4.24
CTE (x,y)	17*	ppm/°C	-	IPC-TM 650-2.4.41
Flammability / Flame Rating	V-0**	class	-	UL-94
Density	4	g/cm ³	+/- 10%	ASTM D792

STORAGE CONDITIONS

Keep storage climate conditions below 24°C and 55% relative humidity. In the event of storing under very low warehouse temperatures give some time for the packed TIM's to stabilize to room temperature before opening. Keeping the above mentioned storage conditions and avoiding TIM's damage by humidity uptake will give a useful life of 6 months after production date.

(*) Value only of the Isolcopper

(**) Flammability rating is only valid when Isolcopper is clad to an aluminium laminate of 0,8mm or higher and at the other side an FR4 with V-0 recognition with 0,8mm or higher.


(***) Only on thermal tape side.

ISOLCOPPER + 2 THERMAL TAPE

Data Sheet DS_63

2/2

STANDARD CONSTRUCTION

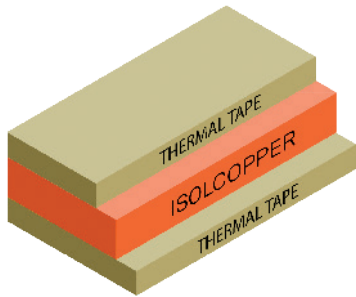


Thermal tape μm (mils)
50 (1,97)

Insulation
thickness μm (mils)
80(3.1)

Thermal tape μm (mils)
50(2)

DESCRIPTION

- Aismalibar Isolcopper is an ultra-thin copper clad with an ultra-thin dielectric layer doped with high end mineral content.
- Side A and Side B with self-adhesive pressure sensitive adhesive tape TT50 with excellent wettability and conformability to aluminum ,copper and FR4 surfaces.
- High Tg : 180°C (DSC)
- Low mounting pressure
- Silicon free
- No need of thermal grease
- Glass free
- Ultra-low thermal resistance
- Dielectric strength 2 kV
- CTE expansion XY 17 ppm



UL Approved QMST2
File: E47820
IPC-4101



RoHS 3 / REACH
Last updated compliance directive



Properties	ICU80 HTG 2TT50	UNITS	TOLERANCE	TEST METHOD
Thermal conductivity	2 (0,056)	W/mK (W/inK)	+/- 15%	ASTM D5470
Thermal Resistance	0,117	K/W	+/- 15%	ASTM D5470
Thermal impedance @10/30/50 psi	1 (0,155)	Kcm ² /W (Kin ² /W)	+/- 15%	ASTM D5470
Nominal thickness (pressed)	180 (7,1)	μm (mils)	+/- 15 μm (0,6mils)	-
Filler Type	Ceramic	-	-	-
Dielectric breakdown voltage, AC	≥ 2	kV	-	IPC TM 650 2.5.6.3
Initial Tack (Peel adhesion)	4,3	N/cm	-	ASTM D3330
Continuous Working Temperature	130*	°C	-	UL-MOT
Decomposition Temperature (Td) Initial	340*	°C	-	IPC-TM 650-2.3.41
Decomposition Temperature (Td) 5% loss	420*	°C	-	IPC-TM 650-2.3.41
Glass transition temperature of dielectric layer (by DSC)	180*	°C	-	IPC-TM 650-2.4.24
CTE (x,y)	17*	ppm/°C	-	IPC-TM 650-2.4.41
Flammability / Flame Rating	V-0**	class	-	UL-94
Density	4	g/cm ³	+/- 10%	ASTM D792

STORAGE CONDITIONS

Keep storage climate conditions below 24°C and 55% relative humidity. In the event of storing under very low warehouse temperatures give some time for the packed TIM's to stabilize to room temperature before opening. Keeping the above mentioned storage conditions and avoiding TIM's damage by humidity uptake will give a useful life of 6 months after production date.

(*) Value only of the Isolcopper

(**)Flammability rating is only valid when Isolcopper is clad to an aluminium laminate of 0,8mm or higher and at the other side an FR4 with V-0 recognition with 0,8mm or higher.