CIOD I CIX, IIIO.	Drawing Title: REMOVE OUTER JACKET, ENDS CUT BLUNT to REMOVE OUTER JACKET, ENDS CUT BLUNT, GT Cable #158WH: 18 / 4 Conductors, mm OD, SJT, 105° Deg.C, 300V, BLACK / WHITE / GREEN / RED, Approvals: UL, CSA or cUL, 635±20mm, GlobTek White	
•	Model No. Power Cord	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. SSS1582F1SSSP-WH(R)	Rev B
Fax (201) 784-0111		

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification

ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at https://www.globtek.com/iso-certificates/

Prop 65 Statement:https://en.globtek.com/prop-65-statement.pdf

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (https://en.globtek.com/terms-and-conditions/).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.

Contents of this document are subject to change without prior notice.

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.

A delay in receipt of this form will delay delivery schedule.

Company Name:	Customer P/N:
Quote Number:	Date:
Authorized Representative Name:	Authorized Representative Signature:

GlobTek, Inc. www.globtek.com	Drawing Title: REMOVE OUTER JACKET, ENDS CUT BLUNT to REMOVE OUTER JACKET, ENDS CUT BLUNT, GT Cable #158WH: 18 / 4 Conductors, mm OD, SJT, 105° Deg.C, 300V GREEN / RED, Approvals: UL, CSA or cUL, 635±20mm, GlobTek White	, BLACK / WHITE /
•	Model No. Power Cord	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. SSS1582F1SSSP-WH(R)	Rev B
Fax (201) 784-0111		

REVISION HISTORY

RE'	V	DESCRIPTION	SUB	DATE	APPROVED
	В	Update to SF format	QA	05/26/2021	QA
	Α	INITIAL RELEASE, RFS. 15635	QA	02/12/2009	QA


Cordset Information:

CordsetColor:GlobTek White


Cord Length (mm):635±20

NOTES:

GlobTek, Inc. www.globtek.com	Drawing Title: REMOVE OUTER JACKET, ENDS CUT BLUNT to REMOVE OUTER JACKET, ENDS CUT BLUNT, GT Cable #158WH: 18 / 4 Conductors, mm OD, SJT, 105° Deg.C, 300V GREEN / RED, Approvals: UL, CSA or cUL, 635±20mm, GlobTek White	, BLACK / WHITE /
186 Veterans Drive,	Model No. Power Cord	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. SSS1582F1SSSP-WH(R)	Rev B
Fax (201) 784-0111		

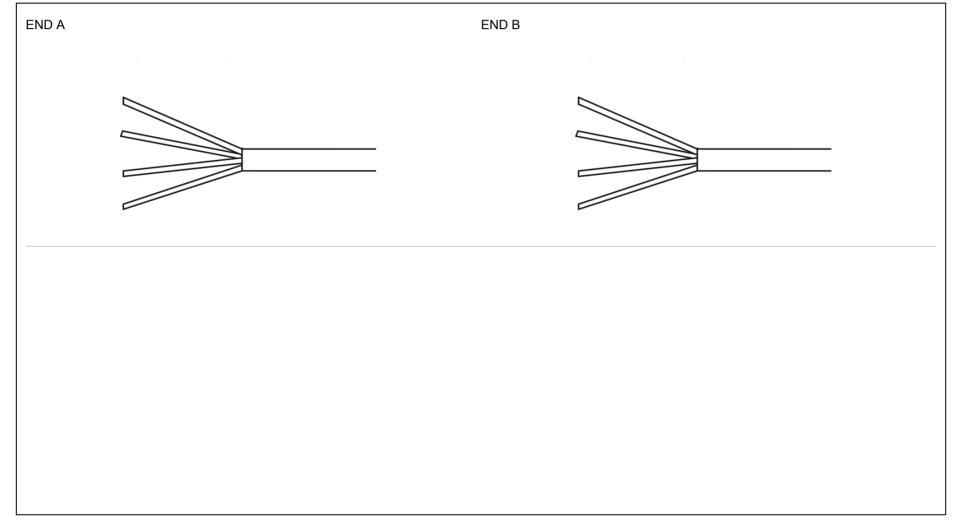

GlobTek, Inc. www.globtek.com	Drawing Title: REMOVE OUTER JACKET, ENDS CUT BLUNT to REMOVE OUTER JACKET, ENDS CUT BLUNT, GT Cable #158WH: 18 / 4 Conductors, mm OD, SJT, 105° Deg.C, 300V GREEN / RED, Approvals: UL, CSA or cUL, 635±20mm, GlobTek White	, BLACK / WHITE /
•	Model No. Power Cord	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. SSS1582F1SSSP-WH(R)	Rev B
Fax (201) 784-0111		

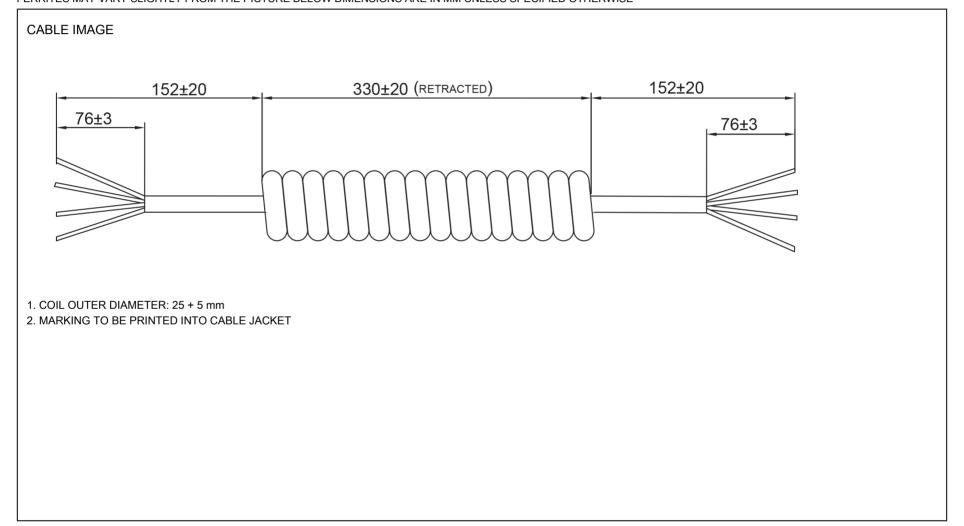

GlobTek, Inc. www.globtek.com	Drawing Title: REMOVE OUTER JACKET, ENDS CUT BLUNT to REMOVE OUTER JACKET, ENDS CUT BLUNT, GT Cable #158WH: 18 / 4 Conductors, mm OD, SJT, 105° Deg.C, 300V GREEN / RED, Approvals: UL, CSA or cUL, 635±20mm, GlobTek White	, BLACK / WHITE /
•	Model No. Power Cord	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. SSS1582F1SSSP-WH(R)	Rev B
Fax (201) 784-0111		

End A	Cable	End B
Code:SSS	Code:158WH	Code:SSS
Description: REMOVE OUTER JACKET, ENDS CUT BLUNT	Description:GT Cable #158WH: 18 / 4 Conductors, mm OD,	Description: REMOVE OUTER JACKET, ENDS CUT BLUNT
Rating (V):	SJT, 105° Deg.C, 300V, BLACK / WHITE / GREEN / RED,	Rating (V):
Rating (A):	Approvals: UL, CSA or cUL	Rating (A):
Gender:N/A	Color:GlobTek White	Gender:N/A
Overmolded:No	Wire Gauge(AWG):18	Overmolded:No
	Cond:4	
	Type:SJT	
	Temperature:105°° C	
	Amps:10	
	Volts:300	
	OD:	
	ConductorsColors:BLACK / WHITE / GREEN / RED	

Overall cable rating:

Plug Approvals	Cable Approvals	Connector Approvals
AGENCY ONLINE DOCUMENTS	http://en.globtek.com/cordsets/	
RoHS/RoHS3 Declaration	https://www.globtek.com/pdf/rohs_cert/01t30000002p9	PDaAAI
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.p	odf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf	
Prop 65 Statement	https://en.globtek.com/prop-65-statement.pdf	
CE.UKCA.Cord	https://globtek.secure.force.com/spec/ec_decl_product	t_model_family_incl_cord?id=01t30000002p9Da
IPXY rating is based on 3rd party testing a	and customers should check suitability and test system level IP	PXY rating before ordering.

CIODICK, IIIC.	Drawing Title: REMOVE OUTER JACKET, ENDS CUT BLUNT to REMOVE OUTER JACKET, ENDS CUT BLUNT, GT Cable #158WH: 18 / 4 Conductors, mm OD, SJT, 105° Deg.C, 300V, BLACK / WHITE / GREEN / RED, Approvals: UL, CSA or cUL, 635±20mm, GlobTek White	
_	Model No. Power Cord	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. SSS1582F1SSSP-WH(R)	Rev B
Fax (201) 784-0111		

2. Will be limit with deligner them the first below billeto into the limit of the or the first below to the
Hanking:Bulk, BUNDLE 25
Description:Bulk Packed in bundles of 25
Image:
N/A
Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec):