



specifications

| Consumption | Voltage       | CRI  | Lens                  | Heat Sink               | L70 hours | Surge Protection | Ambient Temp (F) | Power Factor | UL listing   | THD   | Beam Angle | Enclosed Fixture Rated |
|-------------|---------------|------|-----------------------|-------------------------|-----------|------------------|------------------|--------------|--------------|-------|------------|------------------------|
| 45 W        | 120 - 277 V ⚡ | > 80 | frosted polycarbonate | plastic-coated aluminum | 50,000    | 2.5 KV built-in  | -22° - 113°      | > 0.9        | wet location | < 20% | 240°       | yes                    |

select your lamp

| Part Number        | Color Temp | Base | Lumen Output | Efficacy     |
|--------------------|------------|------|--------------|--------------|
| GI-CC-240WW175-UL3 | 2700K      | E26  | 5,800        | 128.9 lm / W |
| GI-CC-240C175-UL3  | 5000K      | E26  | 5,800        | 128.9 lm / W |

other


| Dimensions          | Warranty | Weight   | Case QTY |
|---------------------|----------|----------|----------|
| 5.5" (D) x 9.4" (L) | 6 years  | 1.03 lbs | 9 pcs    |




Features

- ▶ 100% potted drivers- protects electronics against moisture and vibration
- ▶ 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- ▶ Shatterproof
- ▶ Waterproof design for weather-exposed applications
- ▶ Frosted lens design for open fixtures

Luminous Intensity Distribution

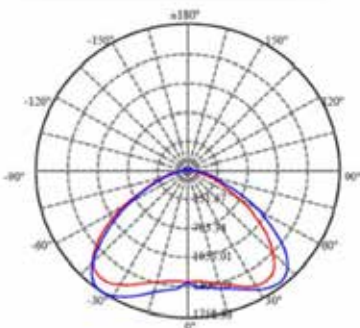

Lux vs Distance

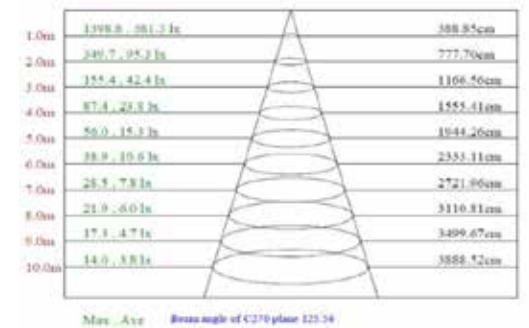

Not all product variations listed on this page may be DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification.

