





PLATE CHARACTERISTICS

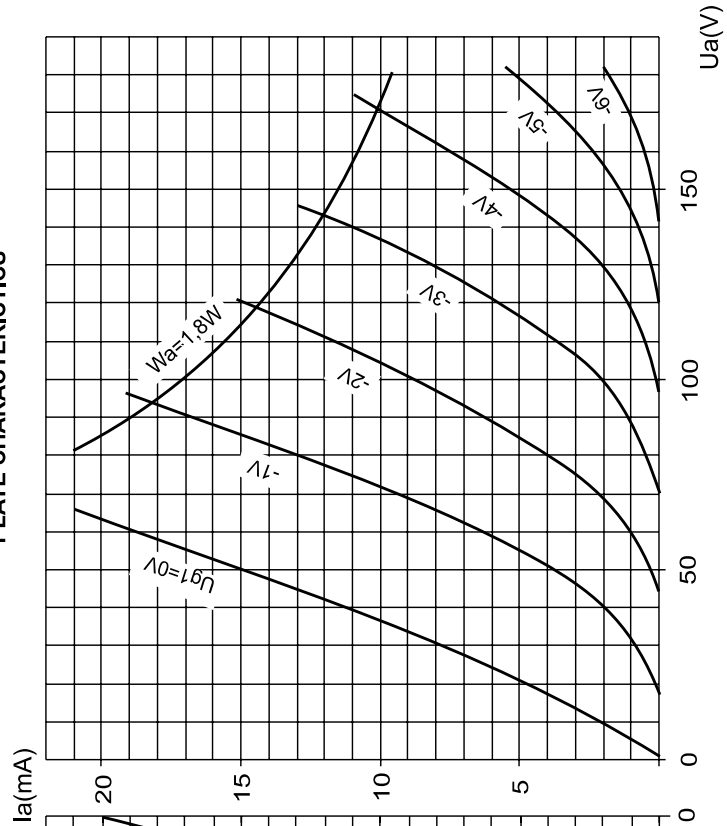

TRANSFER CHARACTERISTICS

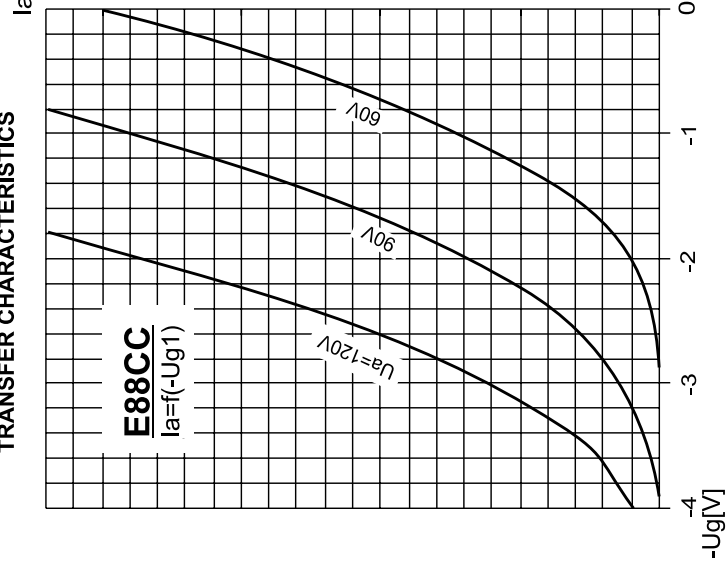

E88CC

R. F. DOUBLE TRIODE
Base: NOVAL

$U_f = 6,3 \text{ V}$
 $I_f = 365 \text{ mA}$

Typical characteristic:

$U_a = 90 \text{ V}$
 $U_g = -1,3 \text{ V}$
 $I_a = 15 \text{ mA}$
 $S = 12,5 \text{ mA/V}$
 $R_i = 2,6 \text{ k}\Omega$
 $\mu = 33$

Limiting values:

$U_{a0} = 550 \text{ V}$
 $U_{a(Ia=0)} = 400 \text{ V}$
 $U_a = 220 \text{ V}$
 $U_{a(War<0,8 \text{ W})} = 250 \text{ V}$
 $P_{aR} = 1,5 \text{ W}$
 $W_{g1R} = 0,03 \text{ W}$
 $I_k = 20 \text{ mA}$
 $U_g = -100 \text{ V}$
 $R_g = 1 \text{ M}\Omega$
 $U_{+k/f} = 120 \text{ V}$
 $U_{-k/f+} = 60 \text{ V}$
 $R_{k/f} = 20 \text{ k}\Omega$

Capacitances:

system I.	system II.
$C_{g/k} = 3,1$	$3,1 \text{ pF}$
$C_a = 0,18$	$0,18 \text{ pF}$
$C_{g/a} = 1,4$	$1,4 \text{ pF}$

Dimension and connections:

