




REVISION		DATE	APPROVED
LTR	DESCRIPTION		
A	NEW RELEASE	05/18/94	H.T.




DB25 Male

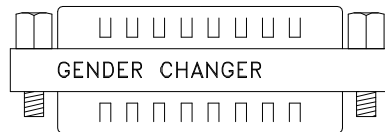

DB25 Male

Specification:

1. Voltage Rating: 300 VAC(rms).
2. Current Rating: 5 AMP Continuous.
3. Dielectric Strength: 1,000 VAC.
4. Insulation Resistance: 5,000 Mohm min.
5. Durability: 30 Cycles for Gold Flash,  
150 Cycles for 15u Gold Plated.
6. Corrosion Resistance: Meet MIL-STD-202F Method  
101 Condition B Salt Water. Spray for Gold Plated Over 15u.
7. Mating Force Insertion Force: 1 oz – 16 oz  
Average 150 gram. Extraction Force: 1 KG min.

UNLESS OTHERWISE SPECIFIED: 1. DIMENSION ARE IN INCHS 2. TOLERANCES: DECIMALES X.XX ±0.25 3. DO NOT SCALE DRAWING 4. REMOVE ALL BURRS AND BREAK SHARP EDGES.	CUSTOMER	 <b>COMTOP</b> Enterprises Corp.		13851 OAKS AVE. CHINO, CA 91710 TEL.: 909-590-5430 FAX: 909-590-5433
	R.F.Q. NO.			
PROPRIETARY DOCUMENT THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN, SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY COMTOP Enterprises Corp.	DRAWN <b>Howie Tseng</b>	DATE 05/18/94	TITLE DB25, M/M, Mini Gender Changer	
	CHECKED	CUSTOMER APPROVAL	SIZE 31D3-221	DWG NO. 31D3-22100
			PART NO. 31D3-22100	REV. A
			SCALE: NDNE	RELEASE DATE: 05/18/94
			SHEET: 1	OF 1