





specifications

| Consumption | Lumen Output | Efficacy   | Base   | Voltage      | CRI  | Lens | Heat Sink | L70 hours | Ambient Temp (F) | Power Factor | UL listing | THD   |
|-------------|--------------|------------|--------|--------------|------|------|-----------|-----------|------------------|--------------|------------|-------|
| 5.9 W       | 755          | 127 lm / W | GY6.35 | 10 - 30 V DC | > 80 | n/a  | aluminum  | 50,000    | -40° - 113°      | > 0.9        | IP40       | < 20% |

| Part Number      | Color Temp |
|------------------|------------|
| GI-GY635-W580-30 | 3000K      |

other

| Dimensions    | Gross Weight | Warranty | Case QTY |
|---------------|--------------|----------|----------|
| 2.32" x 1.22" | 0.71 ounces  | 6 years  | 1 pcs    |

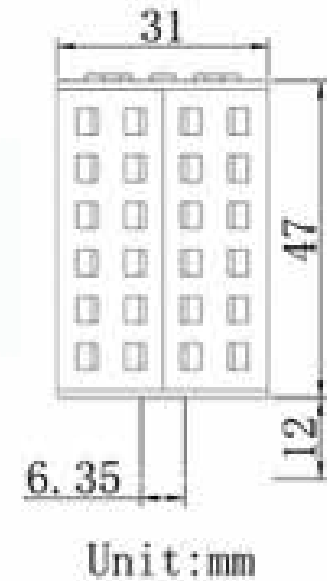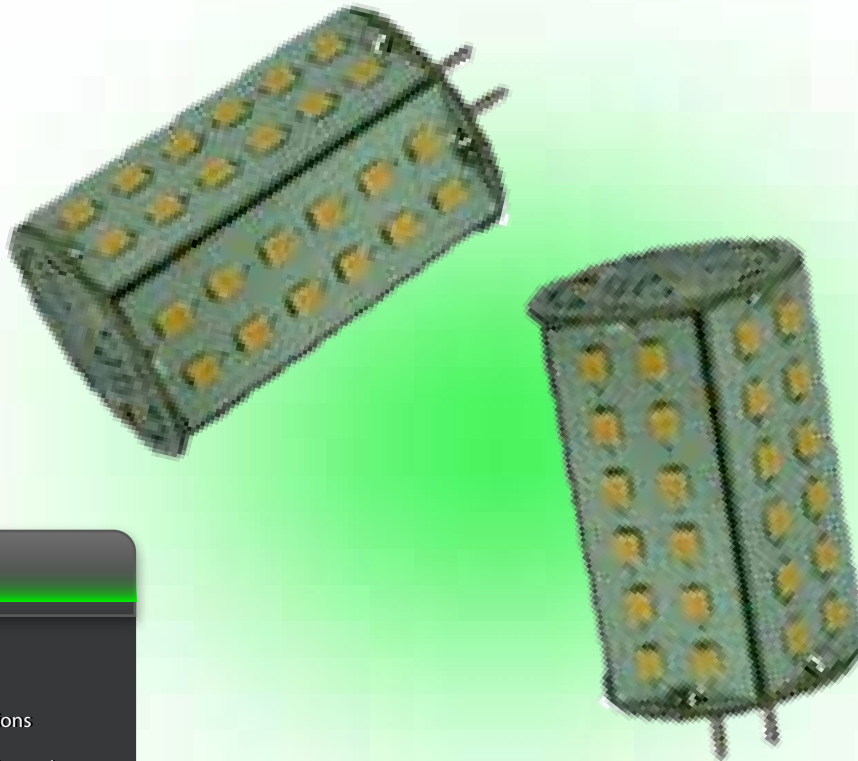

**Features**

- No UV or IR radiation
- 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- 90% energy savings compared to halogen lamps

Not all product variations listed on this page may be DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification.

