
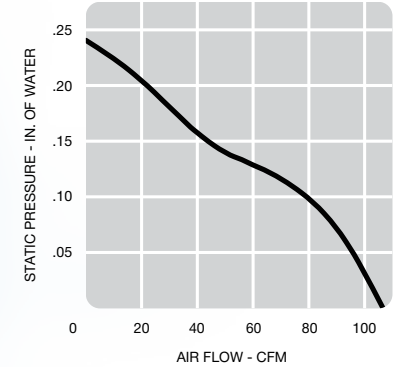


UF12AMR series

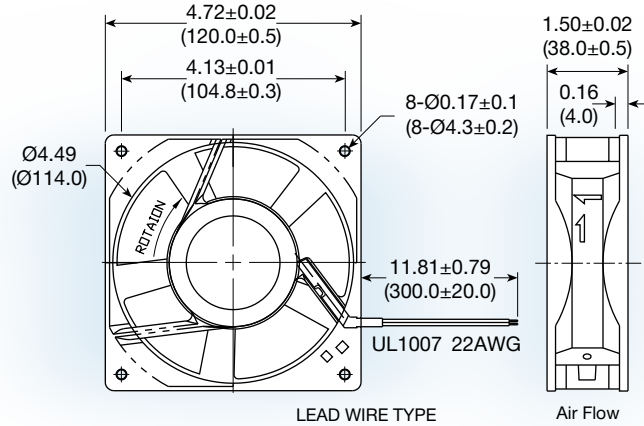

(120 x 120 x 38 mm)

4.72 x 4.72 x 1.50 inches

Features: high temp; -40°C ~+90°C, operating temperature range

Operating Voltage: 115 or 230 VAC

Construction: aluminium die cast frame; metal impeller


Bearing option: ball bearing with high temp lubricant

Motor: shaded pole - Class F insulation

Air Flow: air intake over struts

Connection: terminal or 22 AWG lead wire

Protection: impedance



Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Speed RPM	Air Volume		Max. Sta tic Pressure (H ₂ O)		Sound Noise dB _A	Wt . g
						M ³ /Min.	CFM	MM	INCH		
UF12AMR12	115	60	16	0.19	2,950	3.00	106	6.1	0.24	51	550
UF12AMR23	230	60	18	0.11	2,950	3.00	106	6.1	0.24	51	550

