



Technical Data Sheet for LCC12-8

Single-Stage Thermoelectric Module



NOMINAL PERFORMANCE IN NITROGEN

| | | |
|---------------------------|------|------|
| Hot Side Temperature (°C) | 27 | 50 |
| ΔT_{max} (°C): | 66 | 74 |
| Q _{max} (watts): | 71 | 78 |
| I _{max} (amps): | 7.4 | 7.4 |
| V _{max} (vdc): | 14.7 | 16.4 |
| AC Resistance (ohms): | 1.6 | --- |

PRODUCT FEATURES

- RoHS EU Compliant
- Rated operating temperature of 130°C.
- Ceramic Material: Aluminum Oxide
- Designed for temperature cycling applications.
- Porchless configuration for reduced footprint.
- Superior nickel diffusion barriers on elements.
- High strength for rugged environment.
- RTV sealing option available.
- Lapped option available for multiple module applications.
- ACR Matched Set using Alphanumeric code available (see page 3).

ORDERING OPTIONS

| Model Number | Description |
|--------------|---|
| LCC12-8-01 | Leadwires |
| LCC12-8-01L | Leadwires, Lapped |
| LCC12-8-01S | Leadwires, Sealed |
| LCC12-8-01LS | Leadwires, Lapped, Sealed |
| LCC12-8-16LS | Leadwires, Lapped, Sealed, ACR Matched set of 6 |

OPERATION CAUTIONS

For maximum reliability, storage and operation below 130°C in a non-condensing environment is recommended. To minimize thermal stress, use linear/proportional temperature control or a similar method rather than an ON/OFF method.

INSTALLATION

Recommended mounting methods: Clamp with uniform pressure to a flat surface with thermal interface material. For additional information, please refer to our TEC Installation Guide.


II-VI Marlow – Dallas, TX USA
214-340-4900
877-627-5691
marlow.sales@ii-vi.com

Marlow Industries Europe
GmbH - Germany
+49 (0) 6150 5439 - 403
info@marlow-europe.eu

II-VI Japan Inc.
81 43 297 2693 (tel)
center@ii-vi.co.jp
www.ii-vi.co.jp


II-VI Singapore Pte., Ltd.
(65) 6481 8215 (tel)
info@ii-vi.com.sg

Marlow Industries China, II-VI
Technologies Beijing
86-10-643 98226
info@iivibj.com

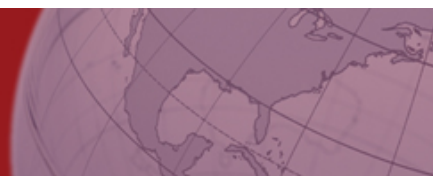


TYPICAL PERFORMANCE CURVES

ENVIRONMENT: ONE ATMOSPHERE DRY NITROGEN

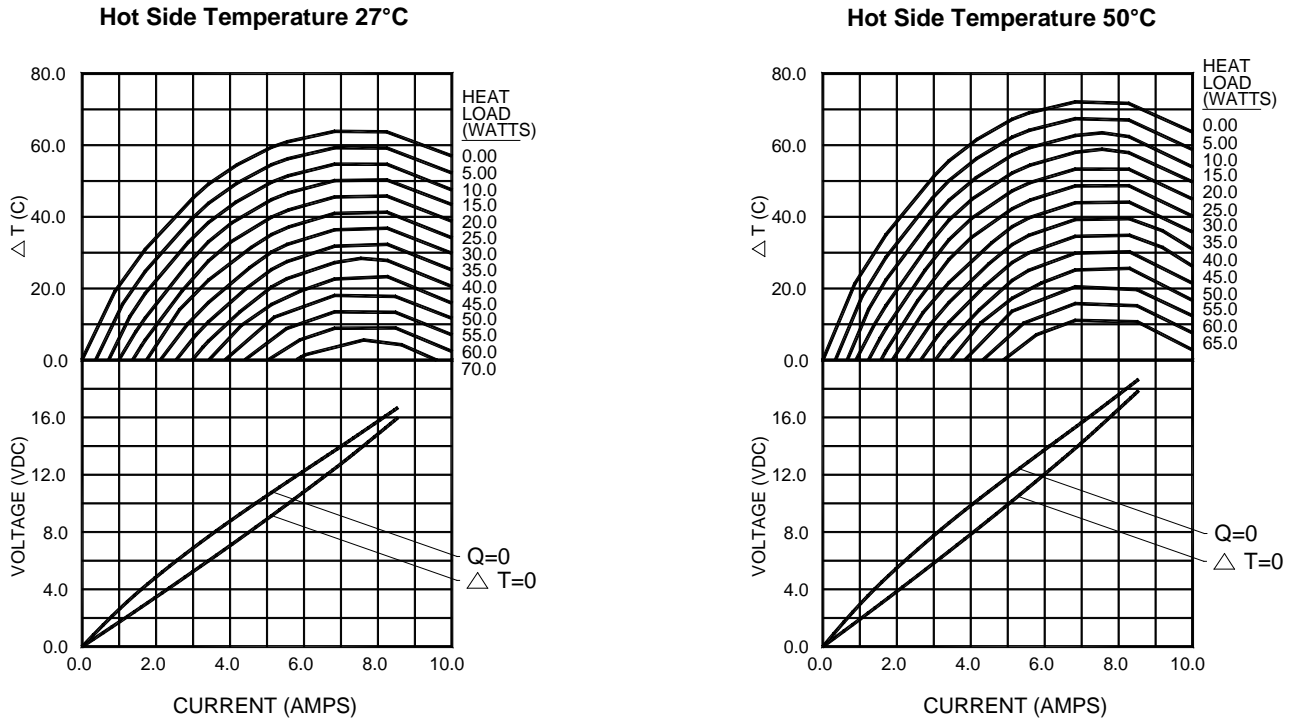

For performance information in a vacuum or with hot side temperatures other than 27°C or 50°C, contact one of our Applications Engineers at 877-627-5691.

MECHANICAL CHARACTERISTICS

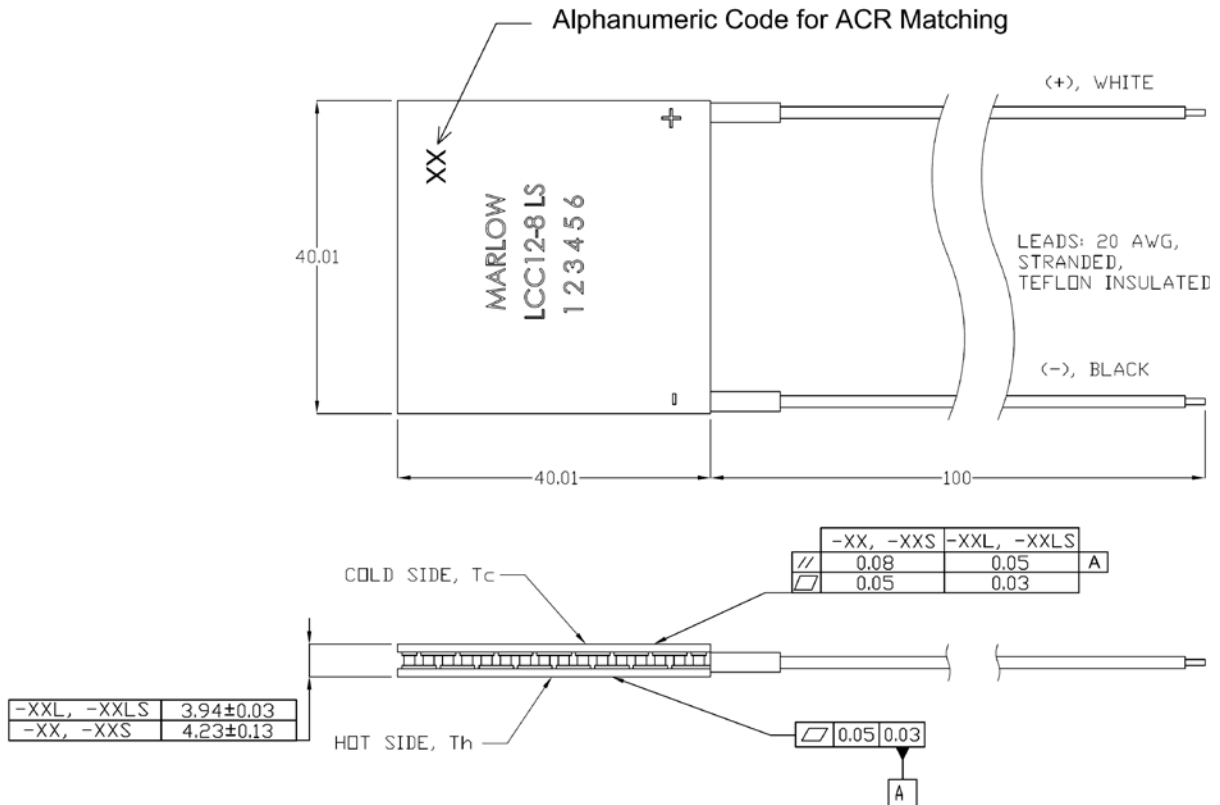

All dimensions are in millimeters unless otherwise stated.

For customer support or general questions please contact a local office or visit our website at www.marlow.com.



| ACR Specification @ 23°C | | | |
|-----------------------------------|---------------|--------------------------|----------------------------------|
| | Min (ohms) | Max (ohms) | Matching Range (max - min) |
| | 1.450 | 1.780 | 0.010 |
| LCC12-8 ACR Matching Table | | | |
| Alphanumeric Code | ACR (ohms) | | Matching Range (max - min) |
| | Greater than | Less than or equal to | |
| A0 | 1.450 | 1.460 | 0.010 |
| A1 | 1.460 | 1.470 | 0.010 |
| A2 | 1.470 | 1.480 | 0.010 |
| A3 | 1.480 | 1.490 | 0.010 |
| A4 | 1.490 | 1.500 | 0.010 |
| A5 | 1.500 | 1.510 | 0.010 |
| A6 | 1.510 | 1.520 | 0.010 |
| A7 | 1.520 | 1.530 | 0.010 |
| A8 | 1.530 | 1.540 | 0.010 |
| A9 | 1.540 | 1.550 | 0.010 |
| B0 | 1.550 | 1.560 | 0.010 |
| B1 | 1.560 | 1.570 | 0.010 |
| B2 | 1.570 | 1.580 | 0.010 |
| B3 | 1.580 | 1.590 | 0.010 |
| B4 | 1.590 | 1.600 | 0.010 |
| B5 | 1.600 | 1.610 | 0.010 |
| B6 | 1.610 | 1.620 | 0.010 |
| B7 | 1.620 | 1.630 | 0.010 |
| B8 | 1.630 | 1.640 | 0.010 |
| B9 | 1.640 | 1.650 | 0.010 |
| C0 | 1.650 | 1.660 | 0.010 |
| C1 | 1.660 | 1.670 | 0.010 |
| C2 | 1.670 | 1.680 | 0.010 |
| C3 | 1.680 | 1.690 | 0.010 |
| C4 | 1.690 | 1.700 | 0.010 |
| C5 | 1.700 | 1.710 | 0.010 |
| C6 | 1.710 | 1.720 | 0.010 |
| C7 | 1.720 | 1.730 | 0.010 |
| C8 | 1.730 | 1.740 | 0.010 |
| C9 | 1.740 | 1.750 | 0.010 |
| D1 | 1.750 | 1.760 | 0.010 |
| D2 | 1.760 | 1.770 | 0.010 |
| D3 | 1.770 | 1.780 | 0.010 |