

**SERIES 225 CARD LOK**

**RECOMMENDED GAP WIDTH**

PCB + 7.62 (.300)

**RECOMMENDED TORQUE**

68 N-cm (6 in-lbs)  
With "L" option 90 N-cm (8 in-lbs)

**WEIGHT**

1.34 g/cm (.120 oz/in)

**MATERIALS AND FINISH**

**WEDGES**

**Material:**

Aluminum Alloy 6061-T6 per per ASTM-B221 or AMS-QQ-A-200/8

**Finish:**

See finish table on opposite page

**SCREW**


.09-in. or 2.5-mm hex. socket head cap screw, depending on mounting configuration

**Material:**

Stainless steel per ASTM-A582

**Finish:**


Passivate per AMS2700

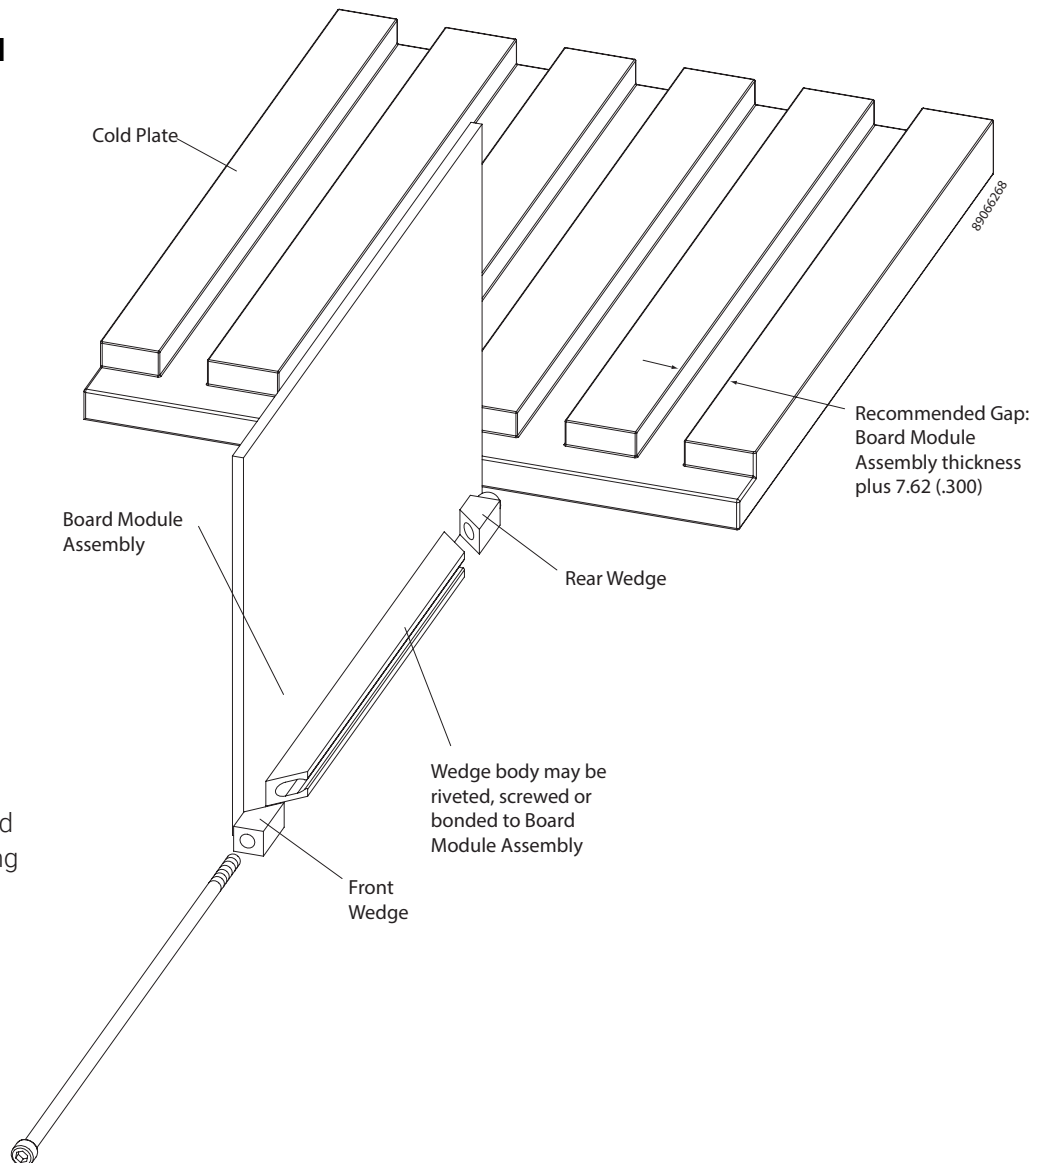

# SERIES 225 CARD LOK


## Detail "V"

Provides visual lock indication.

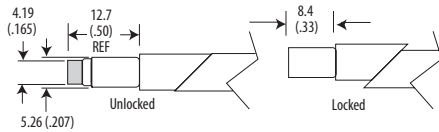


## Detail "W"

Provides added resistance to loosening from shock and vibration. This option adds 2.5 (.10) to the screw length unless combined with the "R" suffix option, then adds 5.1 (.20) total.




## Detail "L"

Provides prevailing torque for resistance to loosening from shock and vibration. Adds 22 N-cm (2 in-lbs) of torque to assembly.





## Detail "R"

Reduces the possibility of unintentional disassembly of the screw from rear wedge. This option adds 2.5 (.10) to the screw length unless combined with the "W" suffix option, then adds 5.1 (.20) total.



## Detail "K"

Prevents the unintentional disassembly of screw from rear wedge. This option adds 5.1 (.20) to the screw length.

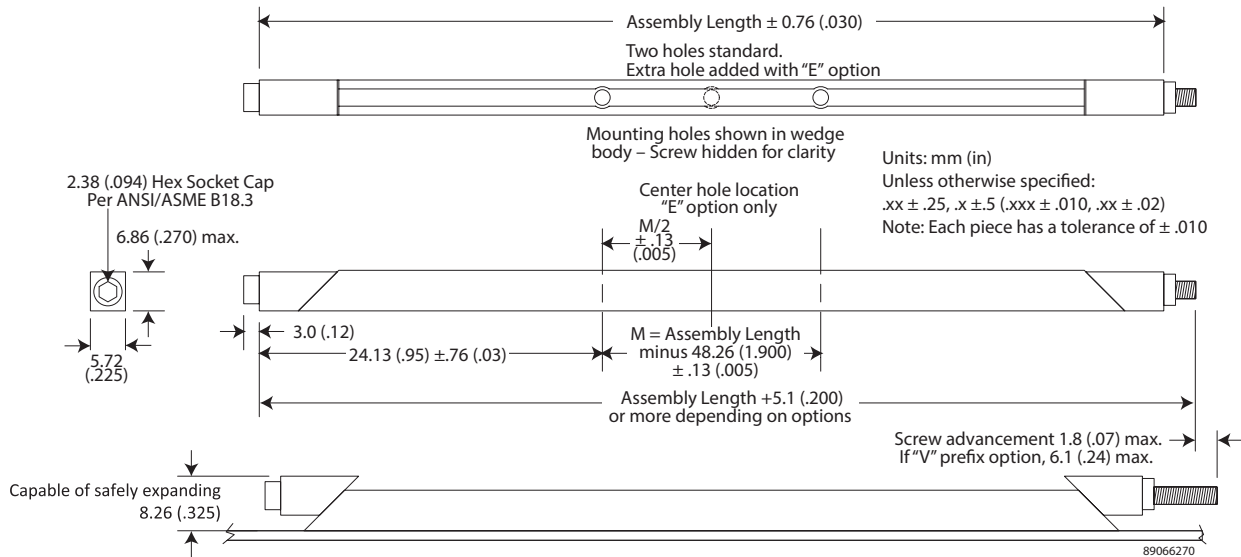

Units: mm (in)  
Unless otherwise specified:  
.xx ± .25, .x ± .5 (.xxx ± .010, .xx ± .02)  
Note: Each piece has a tolerance of ± .010

### Part Number Code

#### Series 225 Card-Lok Three Piece

#### Prefix options

Metric Screw Head M2.5 Hex Drive            **M**  
Standard Screw Head 3/32            **[blank]**  
Lock and Flat Washer            **W**  
None            **[blank]**  
Visual Indicator            **V**  
No Visual Indicator            **[blank]**  
Black Anodize            **A**  
or choose from Finish Table            **see table**

#### Suffix options

Stainless Steel Captive (and Lock Nut if "R" option is also selected)            **CR**  
Standard Plated Steel            **"-"**

Assembly length in inches. Standard lengths are 71.12 (2.80), 96.52 (3.80) and 121.9 (4.80). Other lengths available upon request.            **length.xx**

Additional Center Mounting Hole            **E**  
None            **[blank]**  
Mounting Options - holes for rivet mounting or choose from Mounting Option Table            **see table**  
Lock Element            **L**  
None            **[blank]**  
Lock Nut            **R**  
Captive Screw            **K**  
None            **[blank]**

### Part Number Code Example:

VA225CR-4.80HR

Series 225 Card-Lok three piece 121.9 (4.80) long with Visual Indicator, Black Anodized Finish, standard rivet mounting hole and stainless steel captive nut and lock nut option

#### Code Letter FINISH TABLE

<b>[blank]</b>	Chemical Film per Mil-DTL-5541 Class 1A, Type 1, Gold
<b>"R"</b>	Chemical Film per Mil-DTL-5541 Class 3, Type II, Clear
<b>"A"</b>	Black Anodize per Mil-A-8625 Type II, Class 2
<b>"HA"</b>	Hard Black Anodize per Mil-A-8625 Type III, Class 2
<b>"EN"</b>	Electroless Nickel per Mil-C-26074 Class 4, Grade B, Bright

#### Code Letter MOUNTING METHOD TABLE

<b>[blank]</b>	No mounting holes
<b>"H"</b>	Rivet Mounting Ø1.70 (.067) hole with 3.96 (.156) counterbore x 5.08 (.200) deep and 100° x 3.56 (.140) countersink
<b>"T0"</b>	0-80 tapped hole
<b>"T2"</b>	2-56 tapped hole
<b>"TM2"</b>	M2 x 0.40 tapped hole
<b>"TM2.5"</b>	M2.5 x 0.45 tapped hole



**SCHROFF**

nVent may modify standard parts without prior notice to or approval from customers. These modifications may change product appearance, but will not have a detrimental effect on form, fit or function. ©2018 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without notice.