

CD54/74AC139 CD54/74ACT139

MAXIMUM RATINGS, Absolute-Maximum Values:

| | |
|--|---|
| DC SUPPLY-VOLTAGE (V_{CC}) | -0.5 to 6 V |
| DC INPUT DIODE CURRENT, I_{IK} (for $V_i < -0.5$ V or $V_i > V_{CC} + 0.5$ V) | ± 20 mA |
| DC OUTPUT DIODE CURRENT, I_{OK} (for $V_o < -0.5$ V or $V_o > V_{CC} + 0.5$ V) | ± 50 mA |
| DC OUTPUT SOURCE OR SINK CURRENT per Output Pin, I_o (for $V_o > -0.5$ V or $V_o < V_{CC} + 0.5$ V) | ± 50 mA |
| DC V_{CC} or GROUND CURRENT (I_{CC} or I_{GND}) | ± 100 mA* |
| POWER DISSIPATION PER PACKAGE (P_D): | |
| For $T_A = -55$ to $+100^\circ\text{C}$ (PACKAGE TYPE F) | 500 mW |
| For $T_A = +100$ to $+125^\circ\text{C}$ (PACKAGE TYPE F) | Derate Linearly at 8 mW/ $^\circ\text{C}$ to 300 mW |
| For $T_A = -40$ to $+100^\circ\text{C}$ (PACKAGE TYPE E) | 500 mW |
| For $T_A = +100$ to $+125^\circ\text{C}$ (PACKAGE TYPE E) | Derate Linearly at 8 mW/ $^\circ\text{C}$ to 300 mW |
| For $T_A = -40$ to $+70^\circ\text{C}$ (PACKAGE TYPE M) | 400 mW |
| For $T_A = +70$ to $+125^\circ\text{C}$ (PACKAGE TYPE M) | Derate Linearly at 6 mW/ $^\circ\text{C}$ to 70 mW |
| OPERATING-TEMPERATURE RANGE (T_A): | |
| PACKAGE TYPE F | -55 to $+125^\circ\text{C}$ |
| PACKAGE TYPE E, M | -40 to $+125^\circ\text{C}$ |
| STORAGE TEMPERATURE (T_{stg}) | -65 to $+150^\circ\text{C}$ |
| LEAD TEMPERATURE (DURING SOLDERING): | |
| At distance $1/16 \pm 1/32$ in. (1.59 ± 0.79 mm) from case for 10 s maximum | $+265^\circ\text{C}$ |
| Unit inserted into PC board min. thickness $1/16$ in. (1.59 mm) with solder contacting lead tips only | $+300^\circ\text{C}$ |


*(For up to 4 outputs per device; add ± 25 mA for each additional output.)

RECOMMENDED OPERATING CONDITIONS:

For maximum reliability, normal operating conditions should be selected so that operation is always within the following ranges:

| CHARACTERISTIC | LIMITS | | UNITS |
|---|-------------|------------------|--------------------------------------|
| | MIN. | MAX. | |
| Supply-Voltage Range, V_{CC} *: (For $T_A =$ Full Package-Temperature Range) AC Types ACT Types | 1.5 4.5 | 5.5 5.5 | V V |
| DC Input or Output Voltage, V_i, V_o | 0 | V_{CC} | V |
| Operating Temperature, T_A : CD74 Types CD54 Types | -40 -55 | $+125$ $+125$ | $^\circ\text{C}$ $^\circ\text{C}$ |
| Input Rise and Fall Slew Rate, dt/dv at 1.5 V to 3 V (AC Types) at 3.6 V to 5.5 V (AC Types) at 4.5 V to 5.5 V (ACT Types) | 0 0 0 | 50 20 10 | ns/V ns/V ns/V |

*Unless otherwise specified, all voltages are referenced to ground.



TERMINAL ASSIGNMENT

CD54/74AC139

CD54/74ACT139

STATIC ELECTRICAL CHARACTERISTICS: AC Series

| CHARACTERISTICS | TEST CONDITIONS | | V _{CC} (V) | AMBIENT TEMPERATURE (T _A) - °C | | | | | | UNITS |
|--|--|------------------------|------------------------|--|------|------------------------|------|------------------------------------|------|-------|
| | | | | +25 | | 0 to +70 -40 to +85 | | -40 to +125(74) -55 to +125(54) | | |
| | V _I (V) | I _O (mA) | | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | |
| High-Level Input Voltage V _{IH} | | | 1.5 | 1.2 | — | 1.2 | — | 1.2 | — | V |
| | | | 3 | 2.1 | — | 2.1 | — | 2.1 | — | |
| | | | 5.5 | 3.85 | — | 3.85 | — | 3.85 | — | |
| Low-Level Input Voltage V _{IL} | | | 1.5 | — | 0.3 | — | 0.3 | — | 0.3 | V |
| | | | 3 | — | 0.9 | — | 0.9 | — | 0.9 | |
| | | | 5.5 | — | 1.65 | — | 1.65 | — | 1.65 | |
| High-Level Output Voltage V _{OH} | V _{IH} or V _{IL} | -0.05 | 1.5 | 1.4 | — | 1.4 | — | 1.4 | — | V |
| | | -0.05 | 3 | 2.9 | — | 2.9 | — | 2.9 | — | |
| | | -0.05 | 4.5 | 4.4 | — | 4.4 | — | 4.4 | — | |
| | | -4 | 3 | 2.58 | — | 2.48 | — | 2.4 | — | |
| | | -24 | 4.5 | 3.94 | — | 3.8 | — | 3.7 | — | |
| | | # | 5.5 | — | — | 3.85 | — | — | — | |
| Low-Level Output Voltage V _{OL} | V _{IH} or V _{IL} | 0.05 | 1.5 | — | 0.1 | — | 0.1 | — | 0.1 | V |
| | | 0.05 | 3 | — | 0.1 | — | 0.1 | — | 0.1 | |
| | | 0.05 | 4.5 | — | 0.1 | — | 0.1 | — | 0.1 | |
| | | 12 | 3 | — | 0.36 | — | 0.44 | — | 0.5 | |
| | | 24 | 4.5 | — | 0.36 | — | 0.44 | — | 0.5 | |
| | | # | 5.5 | — | — | — | 1.65 | — | — | |
| Input Leakage Current I _I | V _{CC} or GND | | 5.5 | — | ±0.1 | — | ±1 | — | ±1 | μA |
| | | | | | | | | | | |
| Quiescent Supply Current, MSI I _{CC} | V _{CC} or GND | 0 | 5.5 | — | 8 | — | 80 | — | 160 | μA |

#Test one output at a time for a 1-second maximum duration. Measurement is made by forcing current and measuring voltage to minimize power dissipation.

*Test verifies a minimum 50-ohm transmission-line-drive capability for 74AC/ACT Series, 75 ohms for 54AC/ACT Series.

CD54/74AC139 CD54/74ACT139

STATIC ELECTRICAL CHARACTERISTICS: ACT Series

| CHARACTERISTICS | TEST CONDITIONS | V_{CC} (V) | AMBIENT TEMPERATURE (T_A) - °C | | | | | | UNITS | | |
|---|-----------------|--------------------------------------|------------------------------------|------------|------------------------|------|------------------------------------|------|-------|------|----|
| | | | +25 | | 0 to +70 -40 to +85 | | -40 to +125(74) -55 to +125(54) | | | | |
| | | | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | | | |
| High-Level Input Voltage | V_{IH} | | 4.5 to 5.5 | 2 | — | 2 | — | 2 | — | V | |
| Low-Level Input Voltage | V_{IL} | | 4.5 to 5.5 | — | 0.8 | — | 0.8 | — | 0.8 | V | |
| High-Level Output Voltage | V_{OH} | V_{IH} or V_{IL} # * | -0.05 | 4.5 | 4.4 | — | 4.4 | — | 4.4 | — | V |
| | | | -24 | 4.5 | 3.94 | — | 3.8 | — | 3.7 | — | |
| | | | -75 | 5.5 | — | — | 3.85 | — | — | — | |
| | | | -50 | 5.5 | — | — | — | — | 3.85 | — | |
| Low-Level Output Voltage | V_{OL} | V_{IH} or V_{IL} # * | 0.05 | 4.5 | — | 0.1 | — | 0.1 | — | 0.1 | V |
| | | | 24 | 4.5 | — | 0.36 | — | 0.44 | — | 0.5 | |
| | | | 75 | 5.5 | — | — | — | 1.65 | — | — | |
| | | | 50 | 5.5 | — | — | — | — | — | 1.65 | |
| Input Leakage Current | I_I | V_{CC} or GND | | 5.5 | — | ±0.1 | — | ±1 | — | ±1 | µA |
| Quiescent Supply Current, MSI | I_{CC} | V_{CC} or GND | 0 | 5.5 | — | 8 | — | 80 | — | 160 | µA |
| Additional Quiescent Supply Current per Input Pin, TTL Inputs High, 1 Unit Load | ΔI_{CC} | $V_{CC-2.1}$ | | 4.5 to 5.5 | | 2.4 | — | 2.8 | — | 3 | mA |

#Test one output at a time for a 1-second maximum duration. Measurement is made by forcing current and measuring voltage to minimize power dissipation.

*Test verifies a minimum 50-ohm transmission-line-drive capability for 74AC/ACT Series, 75 ohms for 54AC/ACT Series.

ACT INPUT LOADING TABLE

| INPUT | UNIT LOADS* |
|-----------|-------------|
| A0, A1 | 1 |
| \bar{E} | 0.67 |

*Unit load is ΔI_{CC} limit specified in Static Characteristic Chart, e.g., 2.4 mA max. @ 25°C.

CD54/74AC139 CD54/74ACT139

SWITCHING CHARACTERISTICS: AC Series; $t_r, t_f = 3 \text{ ns}$, $C_L = 50 \text{ pF}$


| CHARACTERISTICS | SYMBOL | V _{CC} (V) | 0 to +70°C -40 to +85°C | | -40 to +125°C(74) -55 to +125°C(54) | | UNITS |
|--|-------------------|---------------------|----------------------------|------|--|------|-------|
| | | | MIN. | MAX. | MIN. | MAX. | |
| Propagation Delays: A0, A1 to Outputs | t _{PLH} | 1.5 | — | 129 | — | 144 | ns |
| | t _{PHL} | 3.3* | 3.1 | 14.2 | 2.9 | 16.1 | |
| \bar{E} to Outputs | t _{PLH} | 1.5 | — | 120 | — | 134 | ns |
| | t _{PHL} | 3.3 | 2.9 | 13.4 | 2.7 | 15 | |
| Power Dissipation Capacitance | C _{PD} § | — | 83 Typ. | | 83 Typ. | | pF |
| Input Capacitance | C _I | — | — | 10 | — | 10 | pF |

SWITCHING CHARACTERISTICS: ACT Series; $t_r, t_f = 3 \text{ ns}$, $C_L = 50 \text{ pF}$

| CHARACTERISTICS | SYMBOL | V _{CC} (V) | 0 to +70°C -40 to +85°C | | -40 to +125°C(74) -55 to +125°C(54) | | UNITS |
|--|-------------------|---------------------|----------------------------|------|--|------|-------|
| | | | MIN. | MAX. | MIN. | MAX. | |
| Propagation Delays: A0, A1 to Outputs | t _{PLH} | 5† | 2.7 | 13.2 | 2.5 | 14.7 | ns |
| | t _{PHL} | | | | | | |
| \bar{E} to Outputs | t _{PLH} | 5 | 2.7 | 13.2 | 2.5 | 14.7 | ns |
| | t _{PHL} | | | | | | |
| Power Dissipation Capacitance | C _{PD} § | — | 126 Typ. | | 126 Typ. | | pF |
| Input Capacitance | C _I | — | — | 10 | — | 10 | pF |

*3.3 V: min. is @ 3.6 V
max. is @ 3 V
†5 V: min. is @ 5.5 V
max. is @ 4.5 V
5 V: min. is @ 5.25 V for 0 to +70°C
max. is @ 4.75 V for 0 to +70°C

§C_{PD} is used to determine the dynamic power consumption, per decoder/demultiplexer.
For AC series: $P_D = V_{CC}^2 f_i (C_{PD} + C_L)$
For ACT series: $P_D = V_{CC}^2 f_i (C_{PD} + C_L) + V_{CC} \Delta I_{CC}$ where f_i = input frequency
 C_L = output load capacitance
 V_{CC} = supply voltage.

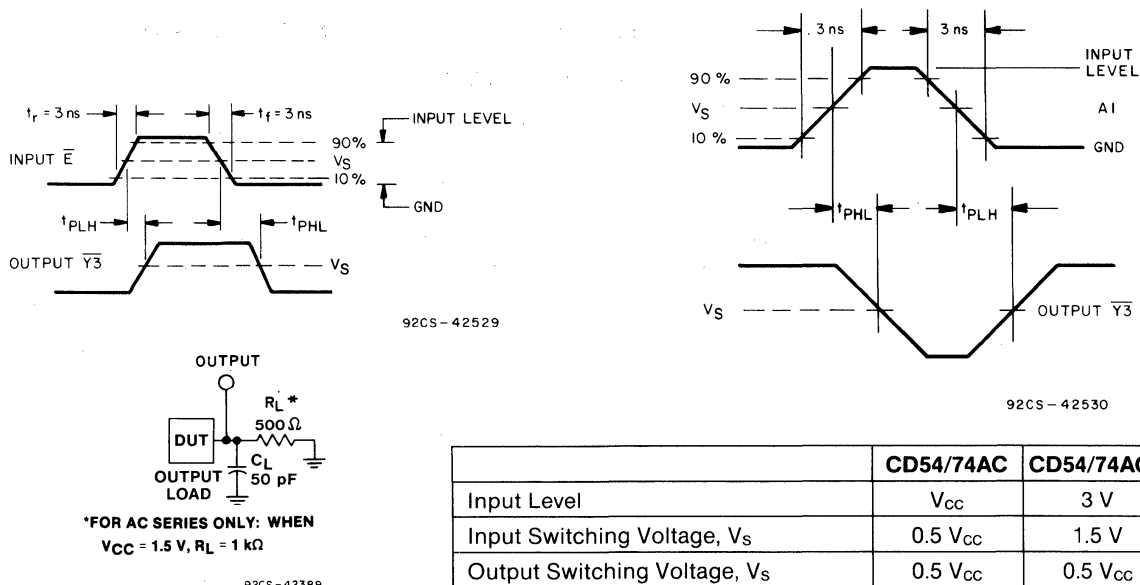

| | CD54/74AC | CD54/74ACT |
|--|---------------------|---------------------|
| Input Level | V _{CC} | 3 V |
| Input Switching Voltage, V _s | 0.5 V _{CC} | 1.5 V |
| Output Switching Voltage, V _s | 0.5 V _{CC} | 0.5 V _{CC} |

Fig. 1 - Propagation delay times and test circuit.