

# Central<sup>TM</sup> Semiconductor Corp.

145 Adams Avenue, Hauppauge, NY 11788 USA  
Tel: (631) 435-1110 • Fax: (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

MD918  
MD918A  
MD918B

NPN DUAL  
SILICON TRANSISTOR

JEDEC TO-78 CASE

## DESCRIPTION

The CENTRAL SEMICONDUCTOR MD918 Series types are Silicon NPN Planar Epitaxial Dual Transistors designed for dual amplifier applications.

## MAXIMUM RATINGS (T<sub>A</sub>=25°C)

	SYMBOL		UNITS
Collector-Base Voltage	V <sub>CB0</sub>	30	V
Collector-Emitter Voltage	V <sub>CEO</sub>	15	V
Emitter-Base Voltage	V <sub>EBO</sub>	3.0	V
Collector Current	I <sub>C</sub>	50	mA
Operating and Storage Junction Temperature	T <sub>J</sub> , T <sub>stg</sub>	-65 to +200	°C
		<u>EACH TRANSISTOR</u>	<u>TOTAL PACKAGE</u>
Power Dissipation	P <sub>D</sub>	550	600 mW
Power Dissipation (T <sub>C</sub> =25°C)	P <sub>D</sub>	1.4	2.0 W
Thermal Resistance	θ <sub>JA</sub>	318	292 °C/W
Thermal Resistance	θ <sub>JC</sub>	125	87.5 °C/W


## ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I <sub>CBO</sub>	V <sub>CB</sub> =15V		10	nA
I <sub>CBO</sub>	V <sub>CB</sub> =15V, T <sub>A</sub> =150°C		1.0	μA
BV <sub>CB0</sub>	I <sub>C</sub> =1.0μA	30		V
BV <sub>CEO</sub>	I <sub>C</sub> =3.0mA	15		V
BV <sub>EBO</sub>	I <sub>E</sub> =10μA	3.0		V
V <sub>CE(SAT)</sub>	I <sub>C</sub> =10mA, I <sub>B</sub> =1.0mA		0.2	V
V <sub>BE(SAT)</sub>	I <sub>B</sub> =10mA, I <sub>C</sub> =1.0mA		0.9	V
h <sub>FE</sub>	V <sub>CE</sub> =5.0V, I <sub>C</sub> =3.0mA	50		
f <sub>T</sub>	V <sub>CE</sub> =10V, I <sub>C</sub> =4.0mA, f=100MHz	600		MHz
C <sub>ob</sub>	V <sub>CB</sub> =10V, I <sub>E</sub> =0, f=100kHz		1.7	pF
C <sub>ib</sub>	V <sub>BE</sub> =0.5V, I <sub>C</sub> =0, f=100kHz		2.0	pF
NF	V <sub>CE</sub> =6.0V, I <sub>C</sub> =1.0mA, R <sub>S</sub> =400Ω, f=60MHz		6.0	dB

**ELECTRICAL CHARACTERISTICS (Continued)**

<u>SYMBOL</u>	<u>TEST CONDITIONS</u>	<u>MIN</u>	<u>MAX</u>	<u>UNITS</u>
$h_{FE1}/h_{FE2}$	$V_{CE}=5.0V, I_C=1.0mA$ (MD918A)	0.9	1.0	
$h_{FE1}/h_{FE2}$	$V_{CE}=5.0V, I_C=1.0mA$ (MD918B)	0.8	1.0	
$ V_{BE1}-V_{BE2} $	$V_{CE}=5.0V, I_C=1.0mA$ (MD918A)		5.0	mV
$ V_{BE1}-V_{BE2} $	$V_{CE}=5.0V, I_C=1.0mA$ (MD918B)		10	mV
$\Delta V_{BE1}-V_{BE2} /\Delta T_A$	$V_{CE}=5.0V, I_C=1.0mA, T_A=-55$ to $+125^\circ C$ (MD918A)		10	$\mu V/^\circ C$
$\Delta V_{BE1}-V_{BE2} /\Delta T_A$	$V_{CE}=5.0V, I_C=1.0mA, T_A=-55$ to $+125^\circ C$ (MD918B)		20	$\mu V/^\circ C$

**JEDEC TO-78 CASE - MECHANICAL OUTLINE**

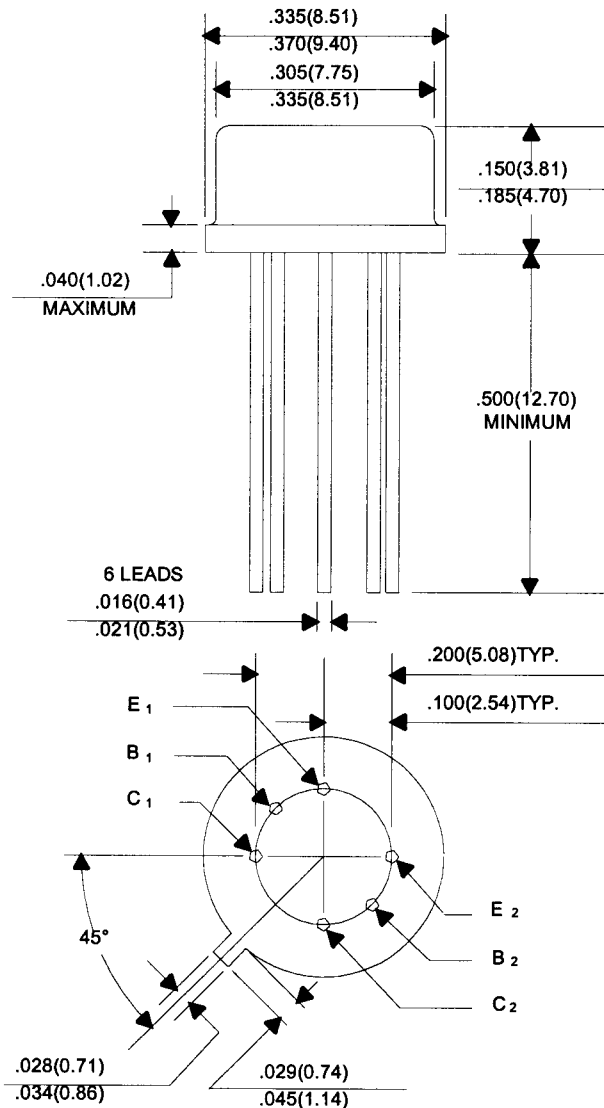

All Dimensions in Inches (mm).

**Central**<sup>TM</sup>  
**Semiconductor Corp.**

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centalsemi.com](http://www.centalsemi.com)

**Worldwide Field Representatives:**  
[www.centalsemi.com/wwreps](http://www.centalsemi.com/wwreps)

**Worldwide Distributors:**  
[www.centalsemi.com/wwdistributors](http://www.centalsemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centalsemi.com/terms](http://www.centalsemi.com/terms)

# Product End of Life Notification

PDN ID:	PDN01061
Notification Date:	1/17/17
Last Buy Date:	7/17/17
Last Shipment Date	1/17/18

Summary: All transistors manufactured in the TO-78 package are discontinued and now classified as End of Life (EOL).

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by various manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's Product Management Process. Any replacement product will be noted below. The effective date for placing the last purchase order will be six(6) months from the date of this notice and twelve(12) months from the notice date for final shipments; this may be extended if inventory is available.

<u>Central Part Number</u>	<u>Replacement</u>
CEN876	N/A
CEN894	N/A
CEN895	N/A
CEN896	N/A
CEN911	N/A
CEN947	N/A
CEN955 W/DATA	N/A
MD2219A	N/A
MD2369	N/A
MD2369A	N/A
MD2369B	N/A
MD2905	N/A
MD2905A	N/A
MD5179	N/A
MD7000	N/A
MD7001	N/A
MD7003	N/A
MD7003A	N/A
MD7003B	N/A
MD8002	N/A
MD8003	N/A
MD918	N/A
MD918A	N/A
MD918B	N/A
MD984	N/A
2N2060	N/A
2N2060A	N/A
2N2060M	N/A
2N2223	N/A
2N2223A	N/A
2N2453	N/A
2N2453A	N/A
2N2480	N/A
2N2480A	N/A
2N2639	N/A
2N2640	N/A
2N2641	N/A
2N2642	N/A

\*\*\* CONTINUED \*\*\*

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.

# Product End of Life Notification

<b>PDN ID:</b>	PDN01061
<b>Notification Date:</b>	1/17/17
<b>Last Buy Date:</b>	7/17/17
<b>Last Shipment Date</b>	1/17/18

\*\*\* CONTINUED FROM PRIOR PAGE \*\*\*

<u>Central Part Number</u>	<u>Replacement</u>
2N2643	N/A
2N2644	N/A
2N2652	N/A
2N2652A	N/A
2N2720	N/A
2N2721	N/A
2N2722	N/A
2N2903	N/A
2N2903A	N/A
2N2913	N/A
2N2914	N/A
2N2915	N/A
2N2915A	N/A
2N2916	N/A
2N2916A	N/A
2N2917	N/A
2N2918	N/A
2N2919	N/A
2N2919A	N/A
2N2920	N/A
2N2920A	N/A
2N3726	N/A
2N3727	N/A
2N3806	N/A
2N3807	N/A
2N3808	N/A
2N3809	N/A
2N3810	N/A
2N3810A	N/A
2N3811	N/A
2N3811A	N/A
2N4015	N/A
2N4016	N/A
2N4854	N/A
2N4937	N/A
2N4938	N/A
2N4939	N/A
2N5793	N/A
2N5794	N/A
2N5796	N/A
2N5912	N/A
2N6502	N/A

\*\*\* CONTINUED \*\*\*

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.



<http://www.centrasemi.com>

# Product End of Life Notification

PDN ID:	PDN01061
Notification Date:	1/17/17
Last Buy Date:	7/17/17
Last Shipment Date	1/17/18

\*\*\* CONTINUED FROM PRIOR PAGE \*\*\*

Central Part Number                      Replacement

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. Please email your requests to [engineering@centrasemi.com](mailto:engineering@centrasemi.com).

---

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.