SDAS210C - DECEMBER 1982 - REVISED JULY 1996


- Single Down/Up Count-Control Line
- Look-Ahead Circuitry Enhances Speed of Cascaded Counters
- Fully Synchronous in Count Modes
- Asynchronously Presettable With Load Control
- Package Options Include Plastic Small-Outline (D) Packages, Ceramic Chip Carriers (FK), and Standard Plastic (N) and Ceramic (J) 300-mil DIPs

#### description


The 'ALS191A are synchronous 4-bit reversible up/down binary counters. Synchronous counting operation is provided by having all flip-flops clocked simultaneously so that the outputs change coincidentally with each other when instructed by the steering logic. This mode of operation eliminates the output counting spikes normally associated with asynchronous (ripple-clock) counters.

The outputs of the four flip-flops are triggered on a low-to-high-level transition of the clock (CLK) input if the count enable ( $\overline{CTEN}$ ) input is low. A high at  $\overline{CTEN}$  inhibits counting. The direction of the count is determined by the level of the down/up (D/ $\overline{U}$ ) input. When D/ $\overline{U}$  is low, the counter counts up, and when D/ $\overline{U}$  is high, the counter counts down.

SN54ALS191A . . . J PACKAGE SN74ALS191A . . . D OR N PACKAGE (TOP VIEW)



SN54ALS191A . . . FK PACKAGE (TOP VIEW)



NC - No internal connection

These counters feature a fully independent clock circuit. Changes at the control inputs ( $\overline{\text{CTEN}}$  and  $\overline{\text{D/U}}$ ) that modify the operating mode have no effect on the contents of the counter until clocking occurs. The function of the counter is dictated solely by the conditions meeting the stable setup and hold times.

These counters are fully programmable. Each output can be preset to either level by placing a low on the  $\overline{\text{LOAD}}$  input and entering the desired data at the data inputs. The output changes to agree with the data inputs independently of the level of the clock input. This feature allows the counters to be used as modulo-N dividers by simply modifying the count length with the preset inputs.

CLK,  $D/\overline{U}$ , and  $\overline{LOAD}$  are buffered to lower the drive requirement, which significantly reduces the loading on (current required by) clock drivers, for long parallel words.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



### SN54ALS191A, SN74ALS191A SYNCHRONOUS 4-BIT UP/DOWN BINARY COUNTERS


SDAS210C - DECEMBER 1982 - REVISED JULY 1996

#### description (continued)

Two outputs are available to perform the cascading function: ripple clock and maximum/minimum count. The latter output produces a high-level output pulse with a duration approximately equal to one complete cycle of the clock while the count is minimum (0) counting down or maximum (15) counting up. The ripple-clock output  $(\overline{RCO})$  produces a low-level output pulse under those same conditions, but only while the clock input is low. The counter easily can be cascaded by feeding the ripple-clock output to the enable input of the succeeding counter if parallel clocking is used, or to the clock input if parallel enabling is used. The maximum/minimum count (MAX/MIN) output can be used to accomplish look ahead for high-speed operation.

The SN54ALS191A is characterized for operation over the full military temperature range of  $-55^{\circ}$ C to  $125^{\circ}$ C. The SN74ALS191A is characterized for operation from  $0^{\circ}$ C to  $70^{\circ}$ C.


### logic symbol†

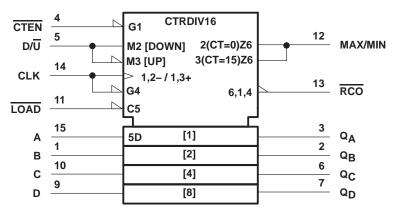

<sup>&</sup>lt;sup>†</sup> This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12. Pin numbers shown are for the D, J, and N packages.



### logic diagram (positive logic)

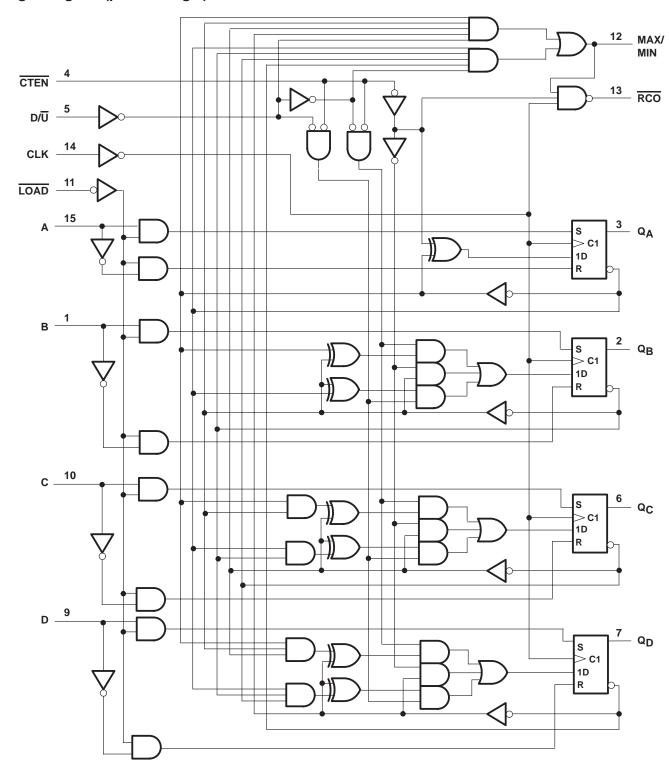


Pin numbers shown are for the D, J, and N packages.

SDAS210C - DECEMBER 1982 - REVISED JULY 1996

#### typical load, count, and inhibit sequences

The following sequence is illustrated below:

- 1. Load (preset) to binary 13
- 2. Count up to 14, 15 (maximum), 0, 1, and 2
- 3. Inhibit
- 4. Count down to 1, 0 (minimum), 15, 14, and 13

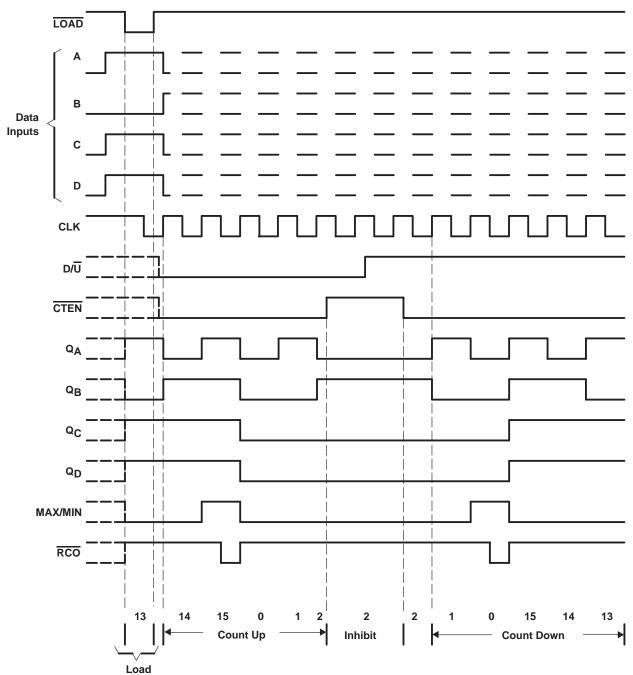



# SN54ALS191A, SN74ALS191A SYNCHRONOUS 4-BIT UP/DOWN BINARY COUNTERS

SDAS210C - DECEMBER 1982 - REVISED JULY 1996

absolute maximum ratings over operating free-air temperature range (unless of	herwise noted)†
Supply voltage, V <sub>CC</sub>	7 V
Input voltage, V <sub>I</sub>	7 V
Operating free-air temperature range, T <sub>A</sub> : SN54ALS191A	55°C to 125°C
SN74ALS191A	0°C to 70°C
Storage temperature range, T <sub>stg</sub>	–65°C to 150°C

### recommended operating conditions

			SN	54ALS19	1A	SN7	'4ALS19	1A	
			MIN	NOM	MAX	MIN	NOM	MAX	UNIT
VCC	Supply voltage		4.5	5	5.5	4.5	5	5.5	V
VIH	High-level input voltage		2			2			V
$V_{IL}$	Low-level input voltage				0.7			0.8	V
IOH	High-level output current				-0.4			-0.4	mA
lOL	Low-level output current				4			8	mA
fclock	Clock frequency		0		20	0		30	MHz
	Pulsa direction	CLK high or low	20			16.5			
t <sub>W</sub>	Pulse duration	LOAD low	25			20			ns
		Data before LOAD↑	25			20			
١.	Outros times	CTEN before CLK↑	45			20			
t <sub>su</sub>	Setup time	D/U before CLK↑	30			20			ns
		LOAD inactive before CLK↑	20			20			
		Data after LOAD↑	5			5			
t <sub>h</sub>	<u>⊢</u>	CTEN after CLK↑	0			0			ns
		D/U after CLK↑	0			0			
TA	Operating free-air temperature		-55		125	0		70	°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

## SN54ALS191A, SN74ALS191A SYNCHRONOUS 4-BIT UP/DOWN BINARY COUNTERS

SDAS210C - DECEMBER 1982 - REVISED JULY 1996

# electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

			SN54ALS1	91A	SN7	4ALS19	1A	LINUT	
PARAMETER	TEST CON	IDITIONS	MIN TYPT	MAX	MIN	TYP†	MAX	UNIT	
VIK	V <sub>CC</sub> = 4.5 V,	$I_1 = -18 \text{ mA}$		-1.5			-1.5	V	
VOH	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V},$	$I_{OH} = -0.4 \text{ mA}$	V <sub>CC</sub> - 2		V <sub>CC</sub> - 2	<u>)</u>			
Mari	V 45V	I <sub>OL</sub> = 4 mA	0.25	0.4		0.25	0.4	V	
VOL	V <sub>CC</sub> = 4.5 V	$I_{OL} = 8 \text{ mA}$				0.35	0.5		
IĮ	$V_{CC} = 5.5 \text{ V},$	V <sub>I</sub> = 7 V		0.2			0.1	mA	
liH	$V_{CC} = 5.5 \text{ V},$	V <sub>I</sub> = 2.7 V		20			20	μΑ	
CTEN or CLK	V 55V	V 04V		-0.2			-0.2	A	
I <sub>IL</sub> All others	$V_{CC} = 5.5 \text{ V},$	$V_{  } = 0.4 \text{ V}$		-0.2			-0.1	mA	
10 <sup>‡</sup>	V <sub>CC</sub> = 5.5 V,	V <sub>O</sub> = 2.25 V	-20	-112	-30		- 112	mA	
Icc	V <sub>CC</sub> = 5.5 V,	All inputs at 0	12	22		12	22	mA	

<sup>&</sup>lt;sup>†</sup> All typical values are at  $V_{CC} = 5 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .

#### switching characteristics (see Figure 1)


PARAMETER	FROM (OUTPUT)	TO (OUTPUT)	V <sub>C</sub> ( C <sub>L</sub> R <sub>L</sub> T <sub>A</sub>	UNIT				
	(001101)	(001101)	SN54AL	S191A	SN74AL	SN74ALS191A		
			MIN	MAX	MIN	MAX		
f <sub>max</sub>			20		30		MHz	
t <sub>PLH</sub>	I CAB	A O	7	37	7	30		
t <sub>PHL</sub>	LOAD	Any Q	8	34	8	30	ns	
t <sub>PLH</sub>	4.5.0.5	A O	3	25	3	21		
t <sub>PHL</sub>	A, B, C, D	Any Q	4	25	4	21	ns	
t <sub>PLH</sub>	011/	RCO	5	24	5	20		
<sup>t</sup> PHL	CLK	RCO	5	25	5	20	ns	
t <sub>PLH</sub>	CLK	Any 0	3	26	3	18	20	
t <sub>PHL</sub>	CLK	Any Q	3	22	3	18	ns	
t <sub>PLH</sub>	OL K	A A A V/A AIA I	8	37	8	31		
t <sub>PHL</sub>	CLK	MAX/MIN	8	34	8	31	ns	
t <sub>PLH</sub>		<del></del>	8	45	8	37		
<sup>t</sup> PHL	D/Ū	RCO	10	36	10	28	ns	
tPLH		A A A X/A AIA I	8	35	8	25		
t <sub>PHL</sub>	D/Ū	MAX/MIN	8	30	8	25	ns	
t <sub>PLH</sub>	CTEN	RCO	4	21	4	18	ne	
<sup>t</sup> PHL	CIEN	KCO	4	23	4	18	ns	

<sup>§</sup> For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.



<sup>‡</sup> The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current, IOS.

# PARAMETER MEASUREMENT INFORMATION SERIES 54ALS/74ALS AND 54AS/74AS DEVICES

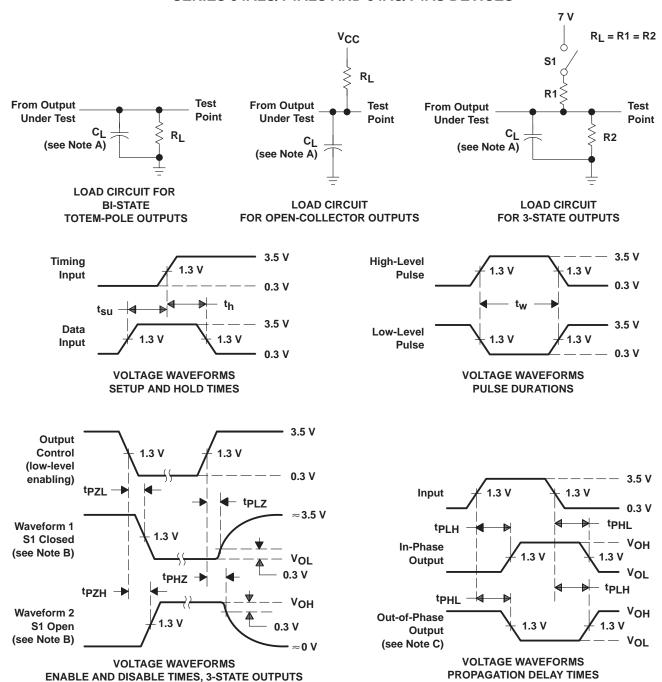

NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- C. When measuring propagation delay items of 3-state outputs, switch S1 is open.
- D. All input pulses have the following characteristics: PRR  $\leq$  1 MHz,  $t_{\Gamma} = t_{\Gamma} = 2$  ns, duty cycle = 50%.
- E. The outputs are measured one at a time with one transition per measurement.

Figure 1. Load Circuits and Voltage Waveforms



www.ti.com 14-Oct-2022

#### **PACKAGING INFORMATION**

Orderable Device	Status	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead finish/ Ball material	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
5962-86840012A	ACTIVE	LCCC	FK	20	1	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962- 86840012A SNJ54ALS 191AFK	Samples
5962-8684001EA	ACTIVE	CDIP	J	16	1	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962-8684001EA SNJ54ALS191AJ	Samples
5962-8684001FA	ACTIVE	CFP	W	16	1	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962-8684001FA SNJ54ALS191AW	Samples
SN74ALS191AD	ACTIVE	SOIC	D	16	40	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	0 to 70	ALS191A	Samples
SN74ALS191ADR	ACTIVE	SOIC	D	16	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	0 to 70	ALS191A	Samples
SN74ALS191AN	ACTIVE	PDIP	N	16	25	RoHS & Green	NIPDAU	N / A for Pkg Type	0 to 70	SN74ALS191AN	Samples
SNJ54ALS191AFK	ACTIVE	LCCC	FK	20	1	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962- 86840012A SNJ54ALS 191AFK	Samples
SNJ54ALS191AJ	ACTIVE	CDIP	J	16	1	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962-8684001EA SNJ54ALS191AJ	Samples
SNJ54ALS191AW	ACTIVE	CFP	W	16	1	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962-8684001FA SNJ54ALS191AW	Samples

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

<sup>(2)</sup> RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

PACKAGE OPTION ADDENDUM

www.ti.com 14-Oct-2022

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### OTHER QUALIFIED VERSIONS OF SN54ALS191A, SN74ALS191A:

Catalog: SN74ALS191A

Military: SN54ALS191A

NOTE: Qualified Version Definitions:

Catalog - TI's standard catalog product

• Military - QML certified for Military and Defense Applications

## **PACKAGE MATERIALS INFORMATION**

www.ti.com 9-Aug-2022

#### TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device		Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74ALS191ADR	SOIC	D	16	2500	330.0	16.4	6.5	10.3	2.1	8.0	16.0	Q1

**PACKAGE MATERIALS INFORMATION** 

www.ti.com 9-Aug-2022



#### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74ALS191ADR	SOIC	D	16	2500	340.5	336.1	32.0

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 9-Aug-2022

#### **TUBE**



\*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
5962-86840012A	FK	LCCC	20	1	506.98	12.06	2030	NA
5962-8684001FA	W	CFP	16	1	506.98	26.16	6220	NA
SN74ALS191AD	D	SOIC	16	40	507	8	3940	4.32
SN74ALS191AN	N	PDIP	16	25	506	13.97	11230	4.32
SN74ALS191AN	N	PDIP	16	25	506	13.97	11230	4.32
SNJ54ALS191AFK	FK	LCCC	20	1	506.98	12.06	2030	NA
SNJ54ALS191AW	W	CFP	16	1	506.98	26.16	6220	NA

# FK (S-CQCC-N\*\*)

### LEADLESS CERAMIC CHIP CARRIER

28 TERMINAL SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package can be hermetically sealed with a metal lid.
- D. Falls within JEDEC MS-004



# D (R-PDS0-G16)

### PLASTIC SMALL OUTLINE



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AC.



# D (R-PDSO-G16)

## PLASTIC SMALL OUTLINE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



# W (R-GDFP-F16)

### CERAMIC DUAL FLATPACK



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package can be hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only.
- E. Falls within MIL STD 1835 GDFP2-F16



### 14 LEADS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

# N (R-PDIP-T\*\*)

### PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.



#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2022, Texas Instruments Incorporated