

Engineering Development/Design Sample Kits

CST306K TRIAD MAGNETICS


Description:

This kit contains representative samples of our high frequency current sense transformers. They are useful for a variety of developmental needs including circuit simulation, circuit testing, prototyping and agency evaluations. All items in this kit meet specifications listed in the catalog section referring to the product. This kit is housed in an easy to see, easy to store clear polycarbonate box with a convenient snap closing hinged lid.



Electrical Specifications (@25C):

Part No.	ET V μ Sec REF 20kHz	Turns Count	Min. Ind. mH	DCR Max. Ω	Pri. Amps
<u>CST306-1</u> A	500	50	3.5	.340	35.0 RMS
<u>CST306-1T</u>	500	50 CT	3.5	.340	35.0 RMS
<u>CST306-2</u> A	1000	100	14.0	1.55	25.0 RMS
<u>CST306-2T</u>	1000	100 CT	14.0	1.55	25.0 RMS
<u>CST306-3</u> A	2000	200	55.0	3.75	25.0 RMS
<u>CST306-3T</u>	2000	200 CT	55.0	3.75	25.0 RMS

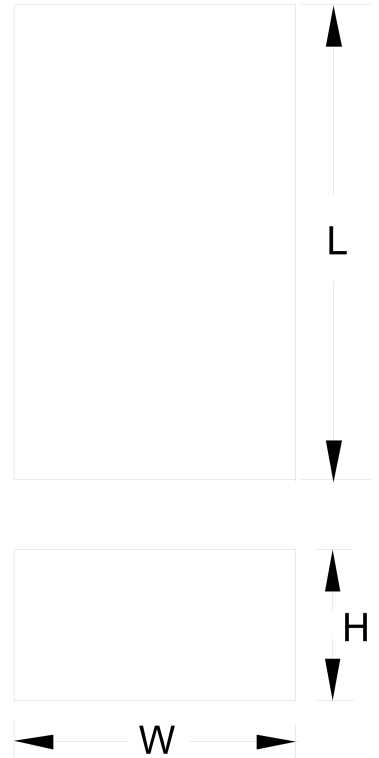

Dimensions:

Height = 2.0"

Width = 3.75"

Length = 2.5"

Weight = 0.25 Lbs.

For more detailed specifications on individual parts, click on the part number or visit us at www.TriadMagnetics.com

RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

Web: www.TriadMagnetics.com
Phone 951-277-0757
Fax 951-277-2757

460 Harley Knox Blvd.
Perris, California 92571

Publish Date: December 4, 2013

	Engineering Development/Design Sample Kits
--	---

* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

Web: www.TriadMagnetics.com Phone 951-277-0757 Fax 951-277-2757	460 Harley Knox Blvd. Perris, California 92571	Publish Date: December 4, 2013
---	---	--------------------------------