

NPN SILICON RF TRANSISTOR 2SC5337

NPN SILICON RF TRANSISTOR FOR HIGH-FREQUENCY LOW DISTORTION AMPLIFIER 4-PIN POWER MINIMOLD

FEATURES

- Low distortion: $IM_2 = 59.0 \text{ dB TYP.}$, $IM_3 = 82.0 \text{ dB TYP.}$ @ VcE = 10 V, Ic = 50 mA
- · Low noise

NF = 1.5 dB TYP. @ VCE = 10 V, IC = 50 mA, f = 500 MHzNF = 2.0 dB TYP. @ VCE = 10 V, IC = 50 mA, f = 1 GHz

· 4-pin power minimold package with improved gain from the 2SC4536

★ ORDERING INFORMATION

Part Number	Quantity	Supplying Form			
2SC5337	25 pcs (Non reel)	Magazine case			
2SC5337-T1	1 kpcs/reel	12 mm wide embossed taping Collector face the perforation side of the tape			

Remark To order evaluation samples, consult your NEC sales representative. Unit sample quantity is 25 pcs.

ABSOLUTE MAXIMUM RATINGS (TA = +25°C)

Parameter	Symbol	Ratings	Unit
Collector to Base Voltage	Vсво	30	٧
Collector to Emitter Voltage	VCEO	15	V
Emitter to Base Voltage	VEBO	3.0	٧
Collector Current	lc	250	mA
Total Power Dissipation	P _{tot} Note	2.0	W
Junction Temperature	Tj	150	လူ
Storage Temperature	Tstg	-65 to +150	°C

Note Mounted on 16 cm $^2 \times 0.7$ mm (t) ceramic substrate (Copper plating)

Because this product uses high-frequency technology, avoid excessive static electricity, etc.

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.

Not all devices/types available in every country. Please check with local NEC representative for availability and additional information.



ELECTRICAL CHARACTERISTICS (TA = +25°C)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit	
DC Characteristics							
Collector Cut-off Current	Ісво	VcB = 20 V, IE = 0 mA	-	0.01	5.0	μΑ	
Emitter Cut-off Current	ІЕВО	VBE = 2 V, Ic = 0 mA	-	0.03	5.0	μΑ	
DC Current Gain	hfe Note 1	Vce = 10 V, Ic = 50 mA	40	120	200	1	
RF Characteristics							
Insertion Power Gain	S _{21e} ²	Vce = 10 V, Ic = 50 mA, f = 1 GHz	7.0	8.3	-	dB	
Noise Figure (1)	NF Note 2	Vce = 10 V, Ic = 50 mA, f = 500 MHz	-	1.5	3.5	dB	
Noise Figure (2)	NF Note 2	Vce = 10 V, Ic = 50 mA, f = 1 GHz	-	2.0	3.5	dB	
2nd Order Intermoduration Distortion	IM ₂	$\begin{split} &\text{VcE} = 10 \text{ V, Ic} = 50 \text{ mA, Rs} = \text{RL} = 75 \ \Omega, \\ &\text{V}_{\text{in}} = 105 \ \text{dB}\mu\text{V}/75 \ \Omega, \ f_1 = 190 \ \text{MHz}, \\ &\text{f}_2 = 90 \ \text{MHz}, \ f = f_1 - f_2 \end{split}$	-	59.0	_	dB	
3rd Order Intermoduration Distortion	IMз	$\begin{aligned} &\text{VcE} = 10 \text{ V, Ic} = 50 \text{ mA, Rs} = \text{RL} = 75 \ \Omega, \\ &\text{V}_{\text{in}} = 105 \ \text{dB}\mu\text{V}/75 \ \Omega, \ f_1 = 190 \ \text{MHz}, \\ &\text{f}_2 = 200 \ \text{MHz}, \ f = 2 \times f_1 - f_2 \end{aligned}$	-	82.0	_	dB	

Notes 1. Pulse measurement: PW \leq 350 μ s, Duty Cycle \leq 2%

2. Rs = RL = 50Ω , tuned

hfe CLASSIFICATION


Rank	QQ	QR	QS
Marking	QQ	QR	QS
h _{FE} Value	40 to 80	60 to 120	100 to 200

2




★ TYPICAL CHARACTERISTICS (Unless otherwise specified, T_A = +25°C)

TOTAL POWER DISSIPATION vs. AMBIENT TEMPERATURE




COLLECTOR CURRENT vs. COLLECTOR TO EMITTER VOLTAGE




Collector to Emitter Voltage Vce (V)

GAIN BANDWIDTH PRODUCT vs. COLLECTOR CURRENT




REVERSE TRANSFER CAPACITANCE vs. COLLECTOR TO BASE VOLTAGE




Collector to Base Voltage VcB (V)


DC CURRENT GAIN vs. COLLECTOR CURRENT




INSERTION POWER GAIN vs. COLLECTOR CURRENT










Remark The graphs indicate nominal characteristics.





S-PARAMETERS


Vce =	10 V	Ic = 50 mA
V CE -	10 0.	

VOL = 10 V, 10	- 00 IIII (
Frequency	S	S ₁₁	S	21	S	12	S	22
(GHz)	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
		(deg.)		(deg.)		(deg.)		(deg.)
0.1	0.592	-136.6	24.447	108.4	0.030	50.5	0.465	-95.2
0.2	0.577	-160.0	12.746	96.5	0.042	57.4	0.335	-123.0
0.3	0.566	-168.5	8.591	91.2	0.055	67.3	0.276	-130.1
0.4	0.558	-174.0	6.438	87.2	0.066	70.8	0.269	-132.7
0.5	0.554	-177.5	5.160	84.1	0.083	68.6	0.262	-134.5
0.6	0.542	-179.4	4.312	82.3	0.095	70.6	0.262	-139.1
0.7	0.527	177.9	3.729	80.9	0.112	71.2	0.251	-133.4
8.0	0.519	175.8	3.292	78.7	0.123	74.6	0.252	-132.9
0.9	0.509	174.4	2.983	77.7	0.136	75.0	0.252	-124.6
1.0	0.514	171.0	2.759	76.6	0.151	75.3	0.257	-125.3
1.1	0.498	166.8	2.648	75.4	0.166	75.8	0.278	-118.4
1.2	0.494	167.3	2.665	71.3	0.180	74.7	0.306	-120.2
1.3	0.487	161.7	2.478	63.0	0.194	75.9	0.314	-124.2
1.4	0.467	160.4	2.177	60.1	0.216	74.7	0.273	-124.0
1.5	0.477	157.4	1.973	57.9	0.230	74.9	0.281	-123.2
1.6	0.471	154.5	1.815	57.2	0.240	73.2	0.291	-120.2
1.7	0.467	152.5	1.754	55.3	0.260	72.9	0.316	-118.7
1.8	0.469	151.3	1.639	54.4	0.273	70.5	0.312	-123.1
1.9	0.465	149.1	1.568	53.4	0.285	69.9	0.316	-125.5
2.0	0.468	147.0	1.475	52.6	0.289	69.3	0.323	-126.3
Vce = 10 V, Ic		3 11	s	21	S	12	S	22
(GHz)	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
(0112)	Wir CO.	(deg.)	Wir CO.	(deg.)	Wir CO.	(deg.)	Wi CO.	(deg.)
		(dog.)		(409.)		(dog.)		(dog.)
0.1	0.564	-146.0	24.857	105.3	0.019	50.2	0.284	-116.1
0.2	0.586	-165.8	12.845	94.5	0.026	59.6	0.204	-129.9
0.3	0.576	-171.9	8.681	89.7	0.041	73.2	0.199	-138.7
0.4	0.561	-176.3	6.541	86.3	0.048	77.8	0.200	-140.1
0.5	0.550	179.9	5.209	83.5	0.060	81.4	0.196	-137.0
0.6	0.540	178.2	4.358	82.2	0.069	82.0	0.182	-137.6
0.7	0.538	175.7	3.772	80.6	0.086	84.2	0.216	-131.0
0.8	0.521	174.6	3.332	78.4	0.099	85.1	0.210	-130.5
0.9	0.510	173.2	3.037	77.0	0.113	85.4	0.222	-122.2
1.0	0.524	168.5	2.780	76.9	0.119	83.5	0.198	-120.1
1.1	0.502	165.2	2.680	75.3	0.136	86.8	0.213	-114.9
1.2	0.489	165.9	2.718	72.3	0.156	83.5	0.246	-114.9
1.3	0.488	161.1	2.578	63.0	0.177	85.5	0.251	-122.8
1.4	0.472	157.9	2.213	58.7	0.184	81.8	0.209	-127.2
1.5	0.480	155.3	2.012	57.8	0.194	85.3	0.252	-114.1
1.6	0.470	153.4	1.846	57.2	0.219	82.2	0.242	-117.6
1.7	0.465	151.1	1.745	56.5	0.235	82.4	0.240	-112.9
1.8	0.464	149.5	1.677	54.9	0.248	79.0	0.263	-121.9
1.9	0.460	147.9	1.571	53.3	0.249	78.6	0.281	-120.0
2.0	0.466	146.0	1.514	52.3	0.264	77.4	0.276	-124.0

5

★ PACKAGE DIMENSIONS

4-PIN POWER MINIMOLD (UNIT: mm)

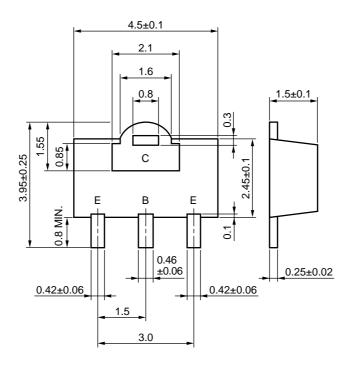

PIN CONNECTIONS

E: Emitter C: Collector B: Base **NEC**

[MEMO]

- The information in this document is current as of September, 2001. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC's data sheets or data books, etc., for the most up-to-date specifications of NEC semiconductor products. Not all products and/or types are available in every country. Please check with an NEC sales representative for availability and additional information.
- No part of this document may be copied or reproduced in any form or by any means without prior written consent of NEC. NEC assumes no responsibility for any errors that may appear in this document.
- NEC does not assume any liability for infringement of patents, copyrights or other intellectual property rights of
 third parties by or arising from the use of NEC semiconductor products listed in this document or any other
 liability arising from the use of such products. No license, express, implied or otherwise, is granted under any
 patents, copyrights or other intellectual property rights of NEC or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of customer's equipment shall be done under the full responsibility of customer. NEC assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC endeavours to enhance the quality, reliability and safety of NEC semiconductor products, customers
 agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize
 risks of damage to property or injury (including death) to persons arising from defects in NEC
 semiconductor products, customers must incorporate sufficient safety measures in their design, such as
 redundancy, fire-containment, and anti-failure features.
- NEC semiconductor products are classified into the following three quality grades:
 - "Standard", "Special" and "Specific". The "Specific" quality grade applies only to semiconductor products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of a semiconductor product depend on its quality grade, as indicated below. Customers must check the quality grade of each semiconductor product before using it in a particular application.
 - "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
 - "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
 - "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC semiconductor products is "Standard" unless otherwise expressly specified in NEC's data sheets or data books, etc. If customers wish to use NEC semiconductor products in applications not intended by NEC, they must contact an NEC sales representative in advance to determine NEC's willingness to support a given application.

(Note)

- (1) "NEC" as used in this statement means NEC Corporation and also includes its majority-owned subsidiaries.
- (2) "NEC semiconductor products" means any semiconductor product developed or manufactured by or for NEC (as defined above).

M8E 00.4