

PI3CH480

Low Voltage, High-Bandwidth, 4-Channel 2:1 Mux/DeMux, NanoSwitch™

The PI3CH480 is a 4-channel, 2:1 Multiplexer/Demultiplexer with 3-state outputs. The switch introduces no additional ground bounce

The PI3CH480 device is very useful in switching signals that have

Features

- Near-Zero propagation delay
- 5-ohm switches connect inputs to outputs
- High signal passing bandwidth (500 MHz)
- · Beyond Rail-to-Rail switching
- 5V I/O tolerant with 3.3V supply
- 2.5V and 3.3V supply voltage operation
- Hot insertion capable
- Industrial operating temperature: -40°C to +85°C
- 2kV ESD Protection (human body model)
- Latch-up performance: >250mA per JESD17
- Packaging (Pb-free & Green available):
 16-pin 150-mil wide plastic QSOP (Q)
 16-pin 173-mil wide plastic TSSOP (L)

 $|A_0|$

 Y_A


- 10-pin 173-min wide plastic 1550P (L)

IA1

 B_0

ıB1

1C0 1C1 1D0 1D1

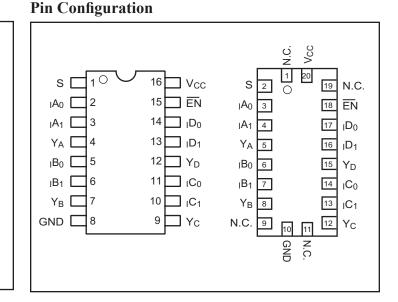

Truth Table⁽¹⁾

| ĒN | S | YA | YB | YC | YD | Function |
|----|---|------|--------------------|-----------------------------|---------------------------|----------|
| Н | Х | Hi-Z | Hi-Z | Hi-Z | Hi-Z | Disable |
| L | L | IA0 | $_{\rm I}{ m B}_0$ | IC0 | $_{\rm I}{\rm D}_0$ | S=0 |
| L | Н | IA1 | $_{I}B_{1}$ | _I C ₁ | $_{\rm I}{\rm D}_{\rm 1}$ | S=1 |

YB

Yc

YD

Notes:

1. H = High Voltage Level

L = Low Voltage Level

Pin Description

Description

noise or propagation delay.

high bandwidth (500 MHz).

| Pin Name | Description |
|----------------------------------|---------------|
| $_{I}A_{N}$ to $_{I}D_{N}$ | Data Inputs |
| S | Select Inputs |
| EN | Enable |
| Y _A to Y _D | Data Outputs |
| GND | Ground |
| V _{CC} | Power |

Block Diagram

ĒN

S



Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

| Storage Temperature | -65° C to $+150^{\circ}$ C |
|--|-------------------------------------|
| Ambient Temperature with Power Applied | -40°C to +85°C |
| Supply Voltage to Ground Potential | -0.5V to +4.6V |
| DC Input Voltage | -0.5V to +6.0V |
| DC Output Current | |
| Power Dissipation | 0.5W |

Note:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

| Parameters | Description | Test Conditions ⁽¹⁾ | Min. | Typ. ⁽²⁾ | Max. | Units |
|------------------|-------------------------------------|--|------|----------------------------|---------|-------|
| V _{IH} | Input HIGH Voltage | Guaranteed Logic HIGH Level | 2.0 | | | |
| V _{IL} | Input LOW Voltage | Guaranteed Logic LOW Level | -0.5 | | 0.8 | V |
| V _{IK} | Clamp Diode Voltage | $V_{CC} = Min., I_{IN} = -18 \text{ mA}$ | | -1.3 | -1.8 | |
| I _{IH} | Input HIGH Current | $V_{CC} = Max., V_{IN} = V_{CC}$ | | | ±1 | |
| I _{IL} | Input LOW Current | $V_{CC} = Max., V_{IN} = GND$ | | | ± 1 | μA |
| I _{OZH} | High Impedance Output Current | $0 \le Y$, $I_N \le V_{CC}$ | | | ± 1 | |
| R _{ON} | Switch On-Resistance ⁽³⁾ | $V_{CC} = Min., V_{IN} = 0V,$ $I_{ON} = 48 \text{ mA or } -64\text{mA}$ | | 4 | 6 | Ω |
| | | $V_{CC} = Min., V_{IN} = 3.6V, I_{ON} = -15 \text{ mA}$ | | 5 | 8 | |

Notes:

1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device type.

2. Typical values are at $V_{CC} = 3.3V$, $T_A = 25^{\circ}C$ ambient and maximum loading.

3. Measured by the voltage drop between Y and In pin at indicated current through the switch. On-Resistance is determined by the lower of the voltages on the two (Y, In) pins.

| Parameters | Description | Test Conditions ⁽¹⁾ | Min. | Typ. ⁽²⁾ | Max. | Units |
|-------------------|-------------------------------------|--|------|----------------------------|----------------|-------|
| V _{IH} | Input HIGH Voltage | Guaranteed Logic HIGH Level | 1.8 | | $V_{CC} + 0.3$ | |
| V _{IL} | Inout LOW Voltage | Guaranteed Logic LOW Level | -0.3 | | 0.8 | V |
| V _{IK} | Clamp Diode Voltage | $V_{CC} = Max., I_{IN} = -6mA$ | | -0.7 | -1.8 | |
| I_{IH} | Input HIGH Current | $V_{CC} = Max., V_{IN} = V_{CC}$ | | | ±1 | |
| I_{IL} | Input LOW Current | $V_{CC} = Max., V_{IN} = GND$ | | | ±1 | μA |
| I _{OZH} | High Impedance Current | $0 \le Y$, In $\le V_{CC}$ | | | ±1 | |
| D | Switch On-Resistance ⁽³⁾ | $V_{CC} = Min., V_{IN} = 0V,$ $I_{ON} = -48mA$ | | 4 | 8 | Ω |
| R _{ON} | Switch On-Resistance | $V_{CC} = Min., V_{IN} = 2.25V,$ $I_{ON} = -15mA$ | | 7 | 14 | 52 |

Notes:

1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device type.

2. Typical values are at $V_{CC} = 3.3V$, $T_A = 25^{\circ}C$ ambient and maximum loading.

^{3.} Measured by the voltage drop between Y and In pin at indicated current through the switch. On-Resistance is determined by the lower of the voltages on the two (Y, In) pins.



Capacitance ($T_A = 25^{\circ}C$, f = 1 MHz)

| Parameters ⁽¹⁾ | Description | Test Conditions | Тур. | Max. | Units |
|---------------------------|-----------------------------|-----------------|------|------|-------|
| C _{IN} | Input Capacitance | | 1.6 | 2.5 | |
| C _{OFF(IN)} | In Capacitance, Switch Off | $V_{-} = 0 V$ | 2.2 | 3.5 | тE |
| C _{OFF(Y)} | Y Capacitance, Switch Off | $V_{IN} = 0V$ | 4.9 | 6.5 | pF |
| C _{ON} | Y/In Capacitance, Switch On | | 8.4 | 10 | |

Notes:

1. This parameter is determined by device characterization but is not production tested.

Power Supply Characteristics

| Parameters | Description | Test Conditions ⁽¹⁾ | Min. | Typ. ⁽²⁾ | Max. | Units |
|-----------------|--------------------------------|---|------|---------------------|------|-------|
| I _{CC} | Quiescent Power Supply Current | V_{CC} = 3.6V, V_{IN} = GND or V_{CC} | | | 0.8 | mA |

Notes:

1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device.

2. Typical values are at $V_{CC} = 3.3V$, $+25^{\circ}C$ ambient.

Dynamic Electrical Characteristics Over the Operating Range ($T_A = -40^\circ$ to $+85^\circ$, $V_{CC} = 3.3V \pm 10\%$)

| Parameter | Description | Test Condition | Min. | Typ. | Max. | Units |
|-------------------|----------------|------------------|------|------|------|-------|
| X _{TALK} | Crosstalk | 10 MHz | | -60 | | ID |
| O _{IRR} | Off-Isolation | 10 MHz | | -60 | | dB |
| BW | -3dB Bandwidth | See Test Diagram | 200 | 500 | | MHz |



Switching Characteristics over 3.3V Operating Range

| Parameters | Description | Conditions ⁽¹⁾ | Com. | | | Units |
|--------------------------------------|--|---------------------------|------|------|------|-------|
| rarameters | Description | Conditions | Min. | Тур. | Max. | Units |
| t _{PLH} t _{PHL} | Propogation $Delay^{(2,3)}$ Y to In, In to Y | See Test Diagram | | | 0.3 | |
| t _{PZH} t _{PZL} | Enable Time S or \overline{EN} to Y or In | See Test Disgrow | 1.5 | | 9.0 | ns |
| t _{PHZ} t _{PLZ} | Disable Time S or \overline{EN} to Y or In | See Test Diagram | 1.5 | | 9.0 | |

Notes:

- 1. See test circuit and waveforms.
- 2. This parameter is guaranteed but not tested on Propagation Delays.
- 3. The switch contributes no propagational delay other than the RC delay of the On-Resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.30ns for 10pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagational delay to the system. Propagational delay of the switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.

| Parameters | Description | Conditions ⁽¹⁾ | Com. | | Units |
|--------------------------------------|--|---------------------------|------|------|-------|
| rarameters | Description | Conditions | Min. | Max. | Units |
| t _{PLH} t _{PHL} | Propogation $Delay^{(2,3)}$ Y to In, In to Y | See Test Diagram | | 0.3 | |
| t _{PZH} t _{PZL} | Enable Time S or \overline{EN} to Y or In | See Test Diegram | 1.5 | 15.0 | ns |
| t _{PHZ} t _{PLZ} | Disable Time S or \overline{EN} to Y or In | See Test Diagram | 1.5 | 12.0 | |

Switching Characteristics over 2.5V Operating Range


Notes:

- 1. See test circuit and waveforms.
- 2. This parameter is guaranteed but not tested on Propagation Delays.

3. The switch contributes no propagational delay other than the RC delay of the On-Resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.30ns for 10pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagational delay to the system. Propagational delay of the switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.



Test Circuit for Electrical Characteristics⁽¹⁾

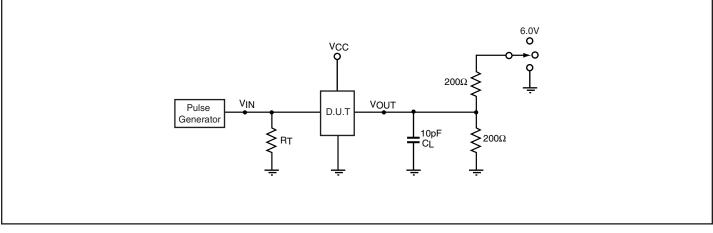


Notes:

- C_L = Load capacitance: includes jig and probe capacitance.
- R_T = Termination resistance: should be equal to Z_{OUT} of the Pulse Generator
- All input impulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_O = 50-ohm, t_R ≤ 2.5 ns, t_F ≤ 2.5 ns.
- The outputs are measured one at a time with one transition per measurement.

Switch Positions


| Test | Switch |
|-------------------------------------|--------|
| t _{PLZ} , t _{PZL} | 6.0V |
| t _{PHZ} , t _{PZH} | GND |
| Prop Delay | Open |

Test Circuit for Dynamic Electrical Characteristics

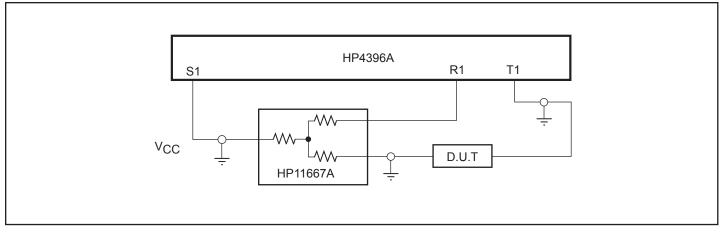



Switching Waveforms

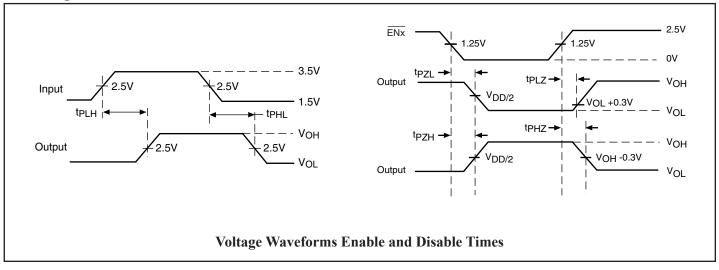

Applications Information

Logic Inputs

The logic control inputs can be driven upto 3.6V regardless of the supply voltage. For example, given a +3.3V supply, $\overline{\text{EN}}$ may be driven LOW to 0V and HIGH to 3.6V. Driving $\overline{\text{EN}}$ Rail-to-Rail[®] minimizes power consumption.

Power Supply-Sequencing

Proper power supply sequencing is recommended for all CMOS devices. Always apply V_{CC} before applying signals to the input/ output or control pins.


Hot Insertion

For Datacom and Telecom applications that have ten or more volts passing through the backplane, a high voltage from the power supply may be seen at the device input pins during hot insertion. The PI3CHxx devices have maximum limits of 6V and 120mA for 20ns. If the power is higher or applied for a longer time or repeatedly reaches the maximum limits, the devices can be damaged.


Rail-to-Rail is a registered trademark of Nippon Motorola, Ltd.



Packaging Mechanical: 16-pin QSOP (Q)

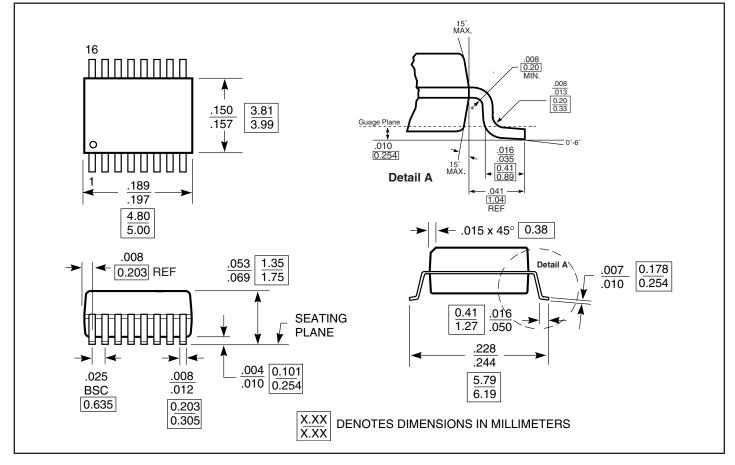

Packaging Mechanical: 16-pin TSSOP (L)

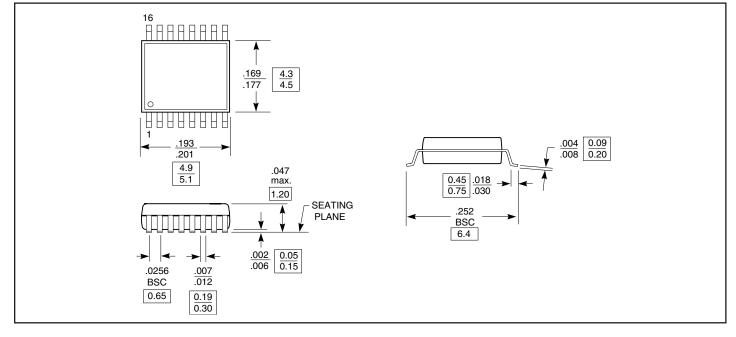



Ordering Information

| Ordering Code | Package Code | Package Description |
|---------------|--------------|--|
| PI3CH480Q | Q | 150-mil, 16-pin QSOP |
| PI3CH480QE | Q | Pb-free & Green, 150-mil, 16-pin QSOP |
| PI3CH480L | L | 173-mil, 16-pin TSSOP |
| PI3CH480LE | L | Pb-free & Green, 173-mil, 16-pin TSSOP |

Notes:

• Thermal characteristics can be found on the company web site at www.pericom.com/packaging/

• E = Pb-free & Green

• Adding an X suffix = Tape/Reel

Pericom Semiconductor Corporation • 1-800-435-2336 • www.pericom.com