# SINGLE-SUPPLY DUAL COMPARATOR

#### ■ GENERAL DESCRIPTION

IRC

The NJM2903/2403 consist of two independent precision voltage comparators with an offset voltage specification as low as 5.0mV max for two comparators, which were designed specifically to operate from a single power supply over a wide range of voltages. Operation from split power supplies is also possible and the low power supply current drain is independent of the magnitude of the power supply voltage. The NJM2903/2403 has a unique characteristic: the input common-mode voltage range includes ground, even though operated from a single power supply voltage. Application areas include limit comparators, simple analog-to-digital converters; pulse, square-wave and time delay generators; wide range V<sub>CO</sub>; MOS clock timers; multivibrators and high voltage digital logic gates. The NJM2903/2403 were designed to directly interface with TTL and MOS.When operated from both plus and minus power supplies, the NJM2903/2403 will directly interface with MOS logic where their low power drain is a distinct advantage over standard comparators.


(+2V~+36V)

(15mA@2403)


#### FEATURES

- Operating Voltage
- Single Supply Operation
- Open Collector Output
- High Output Sink Current
- Package Outline
- Bipolar Technology

#### ■ PIN CONFIGURATION



NJM2903D/2403D NJM2903M/2403M NJM2903V/2403V NJM2903E




DIP8, DMP8, SIP8, SSOP8, EMP8 (NJM2903 only)

NJM2903L/2403L

PIN FUNCTION 1.A OUTPUT 2.A –INPUT 3.A +INPUT 4.GND 5.B +INPUT 6.B –INPUT 7.B OUTPUT 8.V<sup>+</sup>





## New Japan Radio Co.,Ltd.

## PACKAGE OUTLINE



NJM2903D/2403D





FILITI

NJM2903V/2403V

NJM2903L/2403L



NJM2903E

- 1 -

## ■ ABSOLUTE MAXIMUM RATINGS


			( Ta=25°C )
PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V <sup>+</sup>	36 ( or ±18 )	V
Differential Input Voltage	VID	36	V
Input Voltage	VIN	-0.3~+36	V
		(DIP8)500 (DMP8)300	
Power Dissipation	PD	(SSOP8)250	mW
		( SIP8 ) 800	
		(EMP8) 300	
Operating Temperature Range	T <sub>opr</sub>	-40~+85	°C
Storage Temperature Range	T <sub>stg</sub>	-50~+125	С


## ■ ELECTRICAL CHARACTERISTICS


							(•	0v, iu /	
PARAMETER	SYMBOL	TEST CONDITION	2903			2403			UNIT
			MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	
Input Offset Voltage	VIO	R <sub>S</sub> =0Ω,V <sub>O</sub> =1.4V	-	-	7	-	-	10	mV
Input Offset Current	I <sub>IO</sub>		-	-	50	-	-	100	nA
Input Bias Current	IB		-	30	250	-	40	500	nA
Input Common Mode Voltage Range	VICM		0~3.5	-	-	0~3.5	-	-	V
Large Signal Voltage Gain	Av	R <sub>L</sub> =15kΩ	-	106	-	-	106	-	dB
Response Time	t <sub>R</sub>	R <sub>L</sub> =5.1kΩ	-	1.5	-	-	1.5	-	μs
Output Sink Current	I <sub>SINK</sub>	V <sub>IN</sub> =1V,V <sub>IN</sub> <sup>+</sup> =0V,V <sub>O</sub> =1.5V	6	-	-	20	-	-	mA
Output Saturation Voltage	VSAT	V <sub>IN</sub> =1V,V <sub>IN</sub> <sup>+</sup> =0V,I <sub>SINK</sub> =3mA	-	200	400	-	-	-	mV
Output Saturation Voltage	V <sub>SAT</sub>	V <sub>IN</sub> =1V,V <sub>IN</sub> <sup>+</sup> =0V,I <sub>SINK</sub> =15mA	-	-	-	-	200	400	mV
Output Leakage Current	I <sub>LEAK</sub>	V <sub>IN</sub> <sup>-</sup> =0V,V <sub>IN</sub> <sup>+</sup> =1V,V <sub>O</sub> =5V	-	-	1.0	-	-	1.0	μA
Operating Current	Icc		-	0.4	1.0	-	0.5	1.5	mA


( V⁺=5V,Ta=25°C )


#### ■ TYPICAL CHARACTERISTICS

















## TYPICAL CHARACTERISTICS

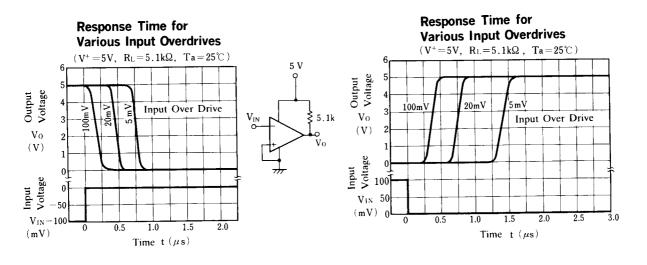


NJM2903 Output Saturation Voltage vs. Operating Voltage



NJM2403 Output Saturation Voltage vs. Operating Voltage



### ■ TYPICAL APPLICATIONS

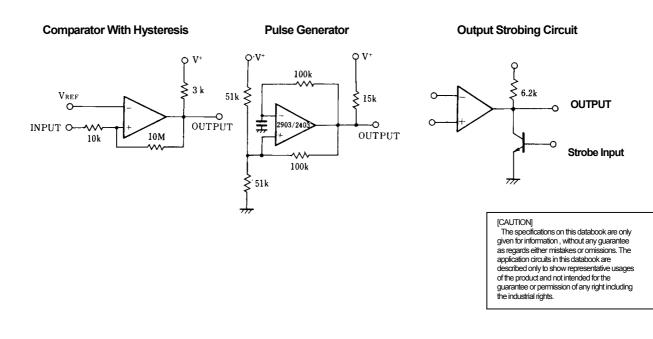

New Japan Radio Co., Ltd.