Document Title

128Kx8 High Speed Static RAM(3.3V Operating), Revolutionary Pin out. Operated at Commercial and Industrial Temperature Range.

Revision History

Rev. No.	<u>History</u>		Draft Data	Remark		
Rev. 0.0	Initial release with Design Target.		Jan. 18th, 1995	Design Target		
Rev. 1.0	Release to Preliminary Data Sheet. 1.1. Replace Design Target to Preliminary	Apr. 22th, 1995	Preliminary			
Rev. 2.0	Release to final Data Sheet. 2.1. Delete Preliminary					
Rev. 3.0	Add Low Power Product and update D.C p 3.1. Add Low Power Products with Isb1=0 Mode(L-ver. only) 3.2. Update D.C parameters. Previous spec.	.5mA and Data Retention Updated spec. art) (12/15/17/20ns part)	Jul. 16th, 1996	Final		
Rev. 4.0	Add Industrial Temperature Range parts at 4.1. Add 32-Pin 300mil-SOJ Package. 4.2. Add Industrial Temperature Range parts as Commercial Temperature Range parts at 4.2.1. Add KM68V1002AI/ALI parts for Range. 4.2.2. Add ordering information. 4.2.3. Add the condition for operating 4.3. Add timing diagram to define twp as "Write Cycle(CS=Controlled)"	orts with the same parame- ge parts. or Industrial Temperature at Industrial Temp. Range.	Jun. 2nd, 1997	Final		
Rev. 5.0	5.1. Delete L-version.5.2. Delete Data Retention Characteristics5.3. Delete 17ns Part5.4. Add Capacitive load of the test environ		Feb. 25th, 1998	Final		

The attached data sheets are prepared and approved by SAMSUNG Electronics. SAMSUNG Electronics CO., LTD. reserve the right to change the specifications. SAMSUNG Electronics will evaluate and reply to your requests and questions on the parameters of this device. If you have any questions, please contact the SAMSUNG branch office near your office, call or contact Headquarters.



128K x 8 Bit High-Speed CMOS Static RAM(3.3V Operating)

FEATURES

- Fast Access Time 12, 15, 20ns(Max.)
- Low Power Dissipation

Standby (TTL) : 20mA(Max.) (CMOS) : 5mA(Max.)

Operating KM68V1002A - 12 : 140mA(Max.)

KM68V1002A - 15 : 135mA(Max.) KM68V1002A - 20 : 130mA(Max.)

- Single 3.3 ± 0.3 V Power Supply
- · TTL Compatible Inputs and Outputs
- · Fully Static Operation
 - No Clock or Refresh required
- · Three State Outputs
- Center Power/Ground Pin Configuration
- · Standard Pin Configuration

KM68V1002AJ : 32-SOJ-400 KM68V1002AT : 32-TSOP2-400F


GENERAL DESCRIPTION

The KM68V1002A is a 1,048,576-bit high-speed Static Random Access Memory organized as 131,072 words by 8 bits. The KM68V1002A uses 8 common input and output lines and has an output enable pin which operates faster than address access time at read cycle. The device is fabricated using Samsung's advanced CMOS process and designed for high-speed circuit technology. It is particularly well suited for use in high-density high-speed system applications. The KM68V1002A is packaged in a 400mil 32-pin plastic SOJ or TSOP2 forward.

ORDERING INFORMATION

KM68V1002A -12/15/20	Commercial Temp.
KM68V1002AI -12/15/20	Industrial Temp.


PIN CONFIGURATION(Top View)



PIN FUNCTION

Pin Name	Pin Function
A0 - A16	Address Inputs
WE	Write Enable
CS	Chip Select
ŌĒ	Output Enable
I/O1 ~ I/O8	Data Inputs/Outputs
Vcc	Power(+3.3V)
Vss	Ground

FUNCTIONAL BLOCK DIAGRAM

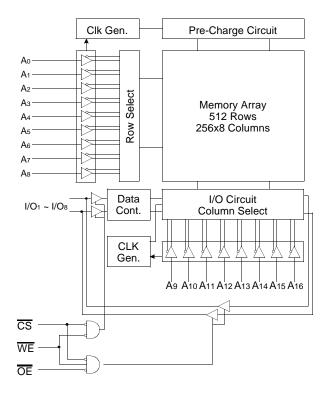



ABSOLUTE MAXIMUM RATINGS*

Param	eter	Symbol	Rating	Unit
Voltage on Any Pin Relative	to Vss	VIN, VOUT	-0.5 to 4.6	V
Voltage on Vcc Supply Rela	tive to Vss	Vcc	-0.5 to 4.6	V
Power Dissipation		Pb	1.0	W
Storage Temperature		Тѕтс	-65 to 150	°C
Operating Temperature	Commercial	TA	0 to 70	°C
	Industrial	TA	-40 to 85	°C

^{*} Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operating sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

RECOMMENDED DC OPERATING CONDITIONS(TA=0 to 70°C)

Parameter	Symbol	Min	Тур	Max	Unit
Supply Voltage	Vcc	3.0	3.3	3.6	V
Ground	Vss	0	0	0	V
Input High Voltage	ViH	2.2	-	Vcc + 0.3**	V
Input Low Voltage	VIL	-0.3*	-	0.8	V

NOTE: The above parameters are also guaranteed at industrial temperature range.

DC AND OPERATING CHARACTERISTICS(TA=0 to 70°C, Vcc=3.3±0.3V, unless otherwise specified)

Parameter	Symbol	Test Conditions		Min	Max	Unit
Input Leakage Current	ILI	VIN = Vss to Vcc	-2	2	μΑ	
Output Leakage Current	llo	CS=VIH or OE=VIH or WE=VIL VOUT=VSS to VCC	-2	2	μΑ	
Operating Current	Icc	Min. Cycle, 100% Duty	12ns	-	140	mA
		CS=VIL, VIN=VIH or VIL, IOUT=0mA	15ns	-	135	
		1001-01114	20ns	-	130	
Standby Current	Isb	Min. Cycle, CS=Vін	-	-	20	mA
	ISB1	f=0MHz, CS ≥Vcc-0.2V, Vin≥Vcc-0.2V or Vin≤0.2V		-	5	mA
Output Low Voltage Level	Vol	IoL=8mA	-	0.4	V	
Output High Voltage Level	Voн	IoH=-4mA		2.4	-	V

NOTE: The above parameters are also guaranteed at industrial temperature range.

CAPACITANCE*(TA=25°C, f=1.0MHz)

ltem	Symbol	Test Conditions	MIN	Max	Unit
Input/Output Capacitance	CI/O	VI/O=0V	-	8	pF
Input Capacitance	CIN	VIN=0V	-	6	pF

^{*} NOTE: Capacitance is sampled and not 100% tested.



^{*} V_{IL}(Min) = -2.0V a.c(Pulse Width≤10ns) for I≤20mA

^{**} ViH(Max) = Vcc + 2.0V a.c (Pulse Width≤10ns) for I≤20mA


AC CHARACTERISTICS(TA=0 to 70°C, Vcc=3.3±0.3V, unless otherwise noted.)

TEST CONDITIONS


Parameter	Value
Input Pulse Levels	0V to 3V
Input Rise and Fall Times	3ns
Input and Output timing Reference Levels	1.5V
Output Loads	See below

NOTE: The above test conditions are also applied at industrial temperature range.

Output Loads(A)



Output Loads(B) for thz, tLz, twhz, tow, toLz & toHz $\,$



READ CYCLE

Parameter	Cumbal	KM68V1	002A-12	KM68V1002A-15		KM68V1002A-20		l lmi4
Parameter	Symbol	Min	Max	Min	Max	Min	Max	Unit
Read Cycle Time	trc	12	-	15	-	20	-	ns
Address Access Time	taa	-	12	-	15	-	20	ns
Chip Select to Output	tco	-	12	-	15	-	20	ns
Output Enable to Valid Output	toe	-	6	-	7	-	9	ns
Chip Enable to Low-Z Output	tLZ	3	-	3	-	3	-	ns
Output Enable to Low-Z Output	tolz	0	-	0	-	0	-	ns
Chip Disable to High-Z Output	tHZ	0	6	0	7	0	9	ns
Output Disable to High-Z Output	tonz	0	6	0	7	0	9	ns
Output Hold from Address Change	tон	3	-	3	-	3	-	ns
Chip Selection to Power Up Time	tpu	0	-	0	-	0	-	ns
Chip Selection to Power DownTime	tPD	-	12	-	15	-	20	ns

NOTE: The above parameters are also guaranteed at industrial temperature range.



^{*} Capacitive Load consists of all components of the test environment.

^{*} Including Scope and Jig Capacitance


WRITE CYCLE

Parameter	Symbol	KM6161	KM6161002A-12 KM61		002A-15	KM6161002A-20		Unit
Parameter	Symbol	Min	Max	Min	Max	Min	Max	Unit
Write Cycle Time	twc	12	-	15	-	20	-	ns
Chip Select to End of Write	tcw	8	-	10	-	12	-	ns
Address Set-up Time	tas	0	-	0	-	0	-	ns
Address Valid to End of Write	taw	8	-	10	-	12	-	ns
Write Pulse Width(OE High)	twp	8	-	10	-	12	-	ns
Write Pulse Width(OE Low)	tWP1	12	-	15	-	20	-	ns
Write Recovery Time	twr	0	-	0	-	0	-	ns
Write to Output High-Z	twnz	0	6	0	7	0	9	ns
Data to Write Time Overlap	tow	6	-	7	-	9	-	ns
Data Hold from Write Time	tDH	0	-	0	-	0	-	ns
End Write to Output Low-Z	tow	3	-	3	-	3	-	ns


NOTE: The above parameters are also guaranteed at industrial temperature range.

TIMMING DIAGRAMS

TIMING WAVEFORM OF READ CYCLE(1) (Address Controlled, $\overline{CS} = \overline{OE} = V_{IL}$, $\overline{WE} = V_{IH}$)




TIMING WAVEFORM OF READ CYCLE(2) (WE=VIH)

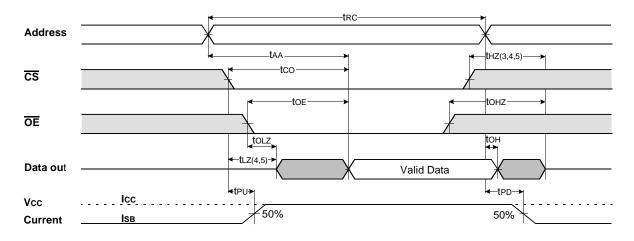


NOTES(READ CYCLE)

- 1. WE is high for read cycle.
- 2. All read cycle timing is referenced from the last valid address to the first transition address.
- 3. tHz and toHz are defined as the time at which the outputs achieve the open circuit condition and are not referenced to VoH or VoL levels.
- At any given temperature and voltage condition, tHz(Max.) is less than tLz(Min.) both for a given device and from device to device.
- 5. Transition is measured ±200mV from steady state voltage with Load(B). This parameter is sampled and not 100% tested.
- 6. Device is continuously selected with CS=VIL.
- 7. Address valid prior to coincident with $\overline{\text{CS}}$ transition low.
- 8. For common I/O applications, minimization or elimination of bus contention conditions is necessary during read and write cycle.

TIMING WAVEFORM OF WRITE CYCLE(1) (OE = Clock)

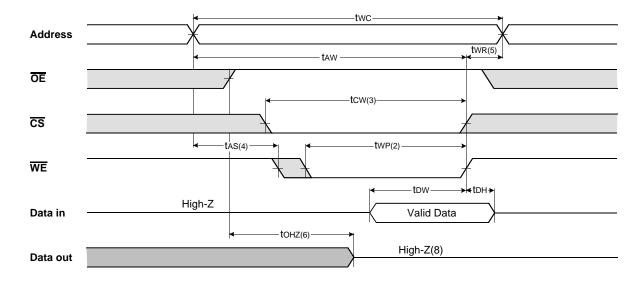


TIMING WAVEFORM OF WRITE CYCLE(2) (OE=Low Fixed)

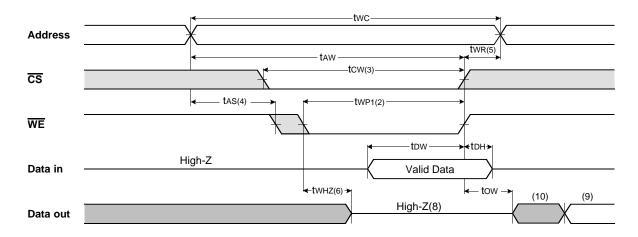



TIMING WAVEFORM OF WRITE CYCLE(3) (CS = Controlled)

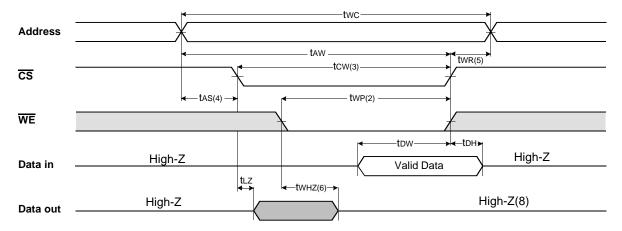

NOTES(WRITE CYCLE)

- 1. All write cycle timing is referenced from the last valid address to the first transition address.
 2. A write occurs during the overlap of a low \overline{CS} and \overline{WE} . A write begins at the latest transition \overline{CS} going low and \overline{WE} going low A write ends at the earliest transition \overline{CS} going high or \overline{WE} going high. two is measured from the beginning of write to the end of
- 3. tcw is measured from the later of $\overline{\text{CS}}$ going low to end of write.
- 4. tas is measured from the address valid to the beginning of write.
- 5. two is measured from the end of write to the address change. two applied in case a write ends as \overline{CS} or \overline{WE} going high.
- 6. If $\overline{\text{OE}}$, $\overline{\text{CS}}$ and $\overline{\text{WE}}$ are in the Read Mode during this period, the I/O pins are in the output low-Z state. Inputs of opposite phase of the output must not be applied because bus contention can occur.
- 7. For common I/O applications, minimization or elimination of bus contention conditions is necessary during read and write cycle.

 8. If CS goes low simultaneously with WE going or after WE going low, the outputs remain high impedance state.
- 9. Dout is the read data of the new address.
- 10. When \overline{CS} is low: I/O pins are in the output state. The input signals in the opposite phase leading to the output should not be

FUNCTIONAL DESCRIPTION


CS	WE	ŌĒ	Mode	I/O Pin	Supply Current
Н	X	X*	Not Select	High-Z	ISB, ISB1
L	Н	Н	Output Disable	High-Z	Icc
L	Н	L	Read	Dout	Icc
L	L	Х	Write	DIN	Icc

^{*} NOTE : X means Don't Care.



PACKAGE DIMENSIONS

32-SOJ-400 Units:millimeters/Inches

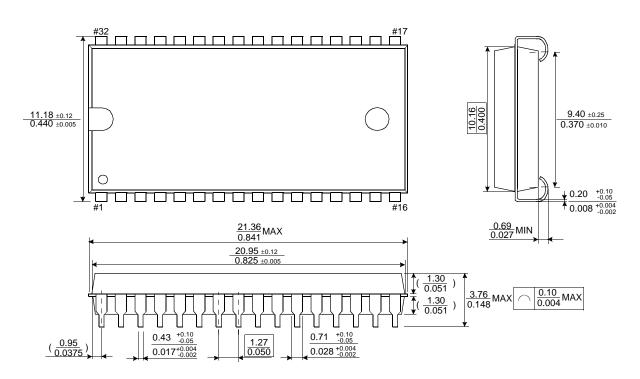

32-TSOP2-400F Units:millimeters/Inches

