TOSHIBA CMOS Digital Integrated Circuit Silicon Monolithic

# TC74HCT374AP,TC74HCT374AF,TC74HCT374AFW

### Octal D-Type Flip-Flop with 3-State Output

The TC74HCT374A is high speed CMOS OCTAL FLIP-FLOP with 3-STATE OUTPUT fabricated with silicon gate C<sup>2</sup>MOS technology.

It achieves the high speed operation similar to equivalent LSTTL while maintaining the CMOS low power dissipation.

Their inputs are compatible with TTL, NMOS, and CMOS output voltage levels.


This 8-bit D-type flip-flop is controlled by a clock input (CK) and an output enable input ( $\overline{OE}$ ).

All inputs are equipped with protection circuits against static discharge or transient excess voltage.


#### **Features**

- High speed:  $f_{max} = 62 \text{ MHz}$  (typ.) at  $V_{CC} = 5 \text{ V}$
- Low power dissipation:  $ICC = 4 \mu A \text{ (max)}$  at  $Ta = 25^{\circ}C$
- Compatible with TTL outputs:  $V_{IH} = 2 V (min)$  $V_{IL} = 0.8 V (max)$
- Wide interfacing ability: LSTTL, NMOS, CMOS
- Output drive capability: 15 LSTTL loads
- Symmetrical output impedance: |IOH| = IOL = 6 mA (min)
- Balanced propagation delays: t<sub>p</sub>LH ≃ t<sub>p</sub>HL
- Pin and function compatible with 74LS374

#### **Pin Assignment**



Note: xxxFW (JEDEC SOP) is not available in Japan.

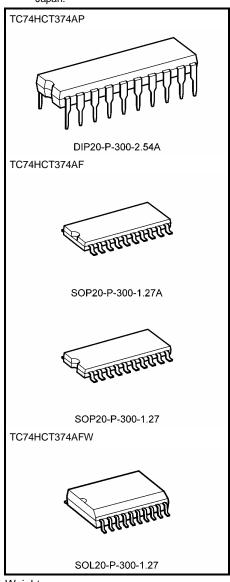

Weight

DIP20-P-300-2.54A : 1.30 g (typ.) SOP20-P-300-1.27A : 0.22 g (typ.) SOP20-P-300-1.27 : 0.22 g (typ.) SOL20-P-300-1.27 : 0.46 g (typ.)

## **IEC Logic Symbol**

OE (1) CK (11)	EN > C1		
DO (3) D1 (4) D2 (7) D3 (8) D4 (13) D5 (14) D6 (17) D7 (18)	1D	▷ ♡	(2) Q0 (5) Q1 (6) Q2 (9) Q3 (12) Q4 (15) Q5 (16) Q6 (19) Q7

### **Truth Table**


	Inputs					
ŌĒ	CK	D	Q			
Н	Х	Х	Z			
L	$\neg$	Х	Q <sub>n</sub>			
L		L	L			
L		Н	Н			

X: Don't care

Z: High impedance

Q<sub>n</sub>: No change

## **System Diagram**

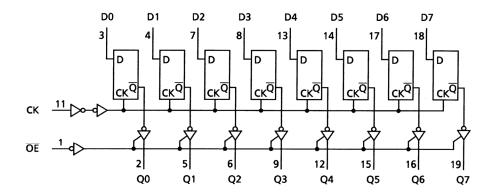

2



## **Absolute Maximum Ratings (Note 1)**

Characteristics	Symbol	Rating	Unit
Supply voltage range	Vcc	-0.5~7	V
DC input voltage	V <sub>IN</sub>	-0.5~V <sub>CC</sub> + 0.5	V
DC output voltage	V <sub>OUT</sub>	-0.5~V <sub>CC</sub> + 0.5	V
Input diode current	I <sub>IK</sub>	±20	mA
Output diode current	lok	±20	mA
DC output current	lout	±35	mA
DC V <sub>CC</sub> /ground current	Icc	±75	mA
Power dissipation	P <sub>D</sub>	500 (DIP) (Note 2)/180 (SOP)	mW
Storage temperature	T <sub>stg</sub>	-65~150	°C

Note 1: Exceeding any of the absolute maximum ratings, even briefly, lead to deterioration in IC performance or even destruction.

Note 2: 500 mW in the range of Ta = -40 to 65°C. From Ta = 65 to 85°C a derating factor of -10 mW/°C shall be applied until 300 mW.

### **Recommended Operating Conditions (Note)**

Characteristics	Symbol	Rating	Unit
Supply voltage	Vcc	4.5~5.5	V
Input voltage	V <sub>IN</sub>	0~V <sub>CC</sub>	V
Output voltage	V <sub>OUT</sub>	0~V <sub>CC</sub>	V
Operating temperature	T <sub>opr</sub>	-40~85	°C
Input rise and fall time	t <sub>r</sub> , t <sub>f</sub>	0~500	ns

Note: The recommended operating conditions are required to ensure the normal operation of the device.

Unused inputs must be tied to either VCC or GND.

### **Electrical Characteristics**

#### **DC Characteristics**

Characteristics Symbol		Test Condition		Ta = 25°C			Ta = -4	Unit		
Characteristics	Symbol			V <sub>CC</sub> (V)	Min	Тур.	Max	Min	Max	Offic
High-level input voltage	VIH	_		4.5~5.5	2.0	_	_	2.0	_	V
Low-level input voltage	V <sub>IL</sub>		_		_	_	0.8	_	0.8	V
High-level output	VoH	V <sub>IN</sub>	$I_{OH} = -20 \mu A$	4.5	4.4	4.5	_	4.4	_	V
voltage	VOH	$= V_{IH}$ or $V_{IL}$	$I_{OH} = -6 \text{ mA}$	4.5	4.18	4.31	_	4.13	_	
Low-level output	Low-level output	V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub>	$I_{OL} = 20 \mu A$	4.5	_	0.0	0.1	_	0.1	V
voltage V <sub>OL</sub>	VOL		I <sub>OL</sub> = 6 mA	4.5	1	0.17	0.26	_	0.33	V
3-state output off-state current	I <sub>OZ</sub>	$V_{IN} = V_{IH} \text{ or } V_{IL}$ $V_{OUT} = V_{CC} \text{ or GND}$		5.5	-		±0.5	_	±5.0	μА
Input leakage current	I <sub>IN</sub>	V <sub>IN</sub> = V <sub>CC</sub> or GND		5.5	_	_	±0.1	_	±1.0	μА
Quiescent supply I <sub>CC</sub> V <sub>IN</sub> =		V <sub>IN</sub> = V <sub>CC</sub> or GND		5.5			4.0	_	40.0	μΑ
current	Ic	Per input: V <sub>IN</sub> = 0.5 V or 2.4 V Other input: V <sub>CC</sub> or GND		5.5	_	_	2.0	_	2.9	mA

3



### Timing Requirements (input: $t_r = t_f = 6$ ns)

Characteristics	Symbol	Test Condition		Ta = 25°C		Ta = -40 ~85°C	Unit
			V <sub>CC</sub> (V)	Тур.	Limit	Limit	
Minimum pulse width	t <sub>W (H)</sub>		4.5	_	15	19	20
(CK)	t <sub>W (L)</sub>	_	5.5	_	14	17	ns
Minimum set-up time	4		4.5	_	15	19	
(Dn)	t <sub>S</sub>	_	5.5	_	14	17	ns
Minimum hold time	4.		4.5	_	0	0	
(Dn)	t <sub>h</sub>	_	5.5	_	0	0	ns
Clask fraguency	f		4.5	_	31	25	MHz
Clock frequency	I		5.5		37	30	IVITZ

#### AC Characteristics (input: $t_r = t_f = 6$ ns)

Characteristics	Test Cor Symbol		ndition		Ta = 25°C			Ta = -4	Unit	
Characteristics	Symbol		CL (pF)	V <sub>CC</sub> (V)	Min	Тур.	Max	Min	Max	Offic
Output transition time	t <sub>TLH</sub>		50	4.5	_	7	12	_	15	ns
Output transition time	t <sub>THL</sub>	_	30	5.5		6	11		14	110
_			50	4.5		20	30		38	
Propagation delay time	t <sub>pLH</sub>		30	5.5		17	25		31	ns
(CK-Q)	$t_{pHL}$	_	150	4.5		25	38		48	113
,			150	5.5		22	33		41	
		$RL = 1 K\Omega$	50	4.5		17	30	_	38	- ns
Output enable time	$t_{pZL}$			5.5	_	14	25	_	31	
Output enable time	t <sub>pZH</sub>		150	4.5	_	25	38	_	48	
			150	5.5	_	19	33	_	41	
Output disable time	t <sub>pLZ</sub>	$R_{I} = 1 k\Omega$	50	4.5	_	16	28	_	35	ns
Output disable time	$t_{pHZ}$	K[ = 1 K22	30	5.5		14	24		30	110
Maximum clock	4		50	4.5	31	50	_	25	_	MHz
frequency	f <sub>max</sub>	ax —	30	5.5	37	59	_	30	_	IVITIZ
Input capacitance	C <sub>IN</sub>	_	-		_	5	10	_	10	pF
Output capacitance	C <sub>OUT</sub>	_	_		_	10	_	_	_	pF
Power dissipation capacitance	C <sub>PD</sub> (Note)	_	_		_	48	_	_	_	pF

Note: CPD is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.

Average operating current can be obtained by the equation:

$$ICC (opr) = CPD \cdot VCC \cdot fIN + ICC/8 (per F/F)$$


And the total C<sub>PD</sub> when n pcs. of flip flop operate can be gained by the following equation:

4

$$C_{PD}$$
 (total) = 30 + 18 · n




## **Package Dimensions**

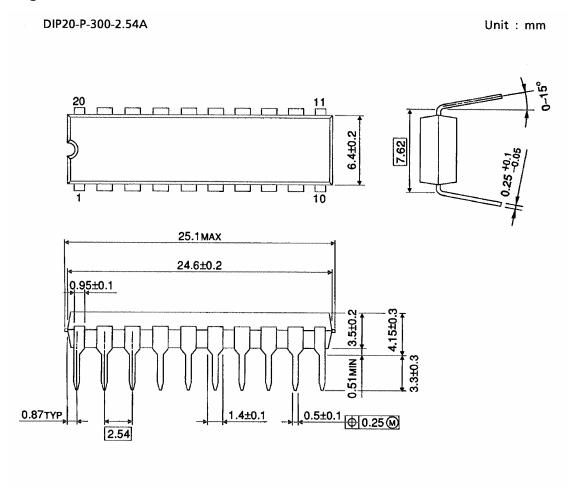

Weight: 1.30 g (typ.)


### **Package Dimensions**

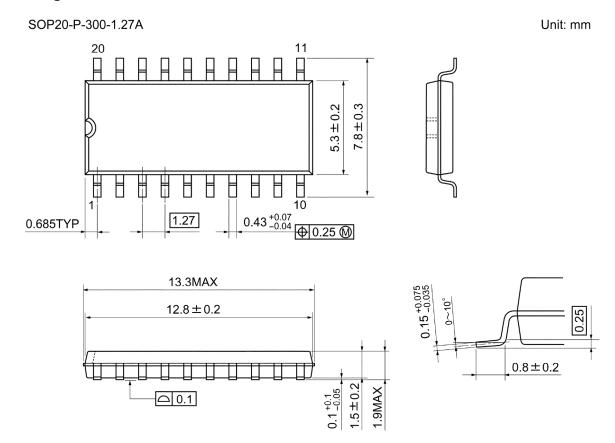

Weight: 0.22 g (typ.)




### **Package Dimensions**

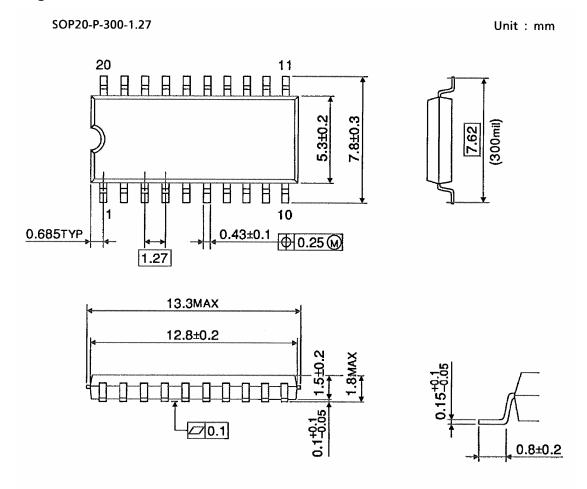

Weight: 0.22 g (typ.)



## **Package Dimensions (Note)**

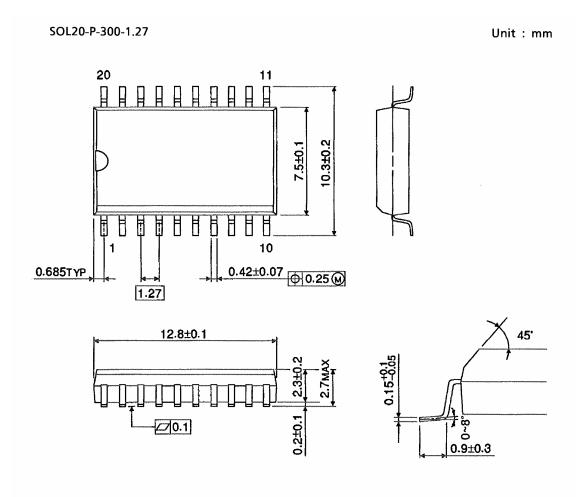

8

Note: This package is not available in Japan.

Weight: 0.46 g (typ.)

Note: Lead (Pb)-Free Packages

DIP20-P-300-2.54A SOP20-P-300-1.27A

#### **RESTRICTIONS ON PRODUCT USE**

060116EBA

- The information contained herein is subject to change without notice. 021023\_D
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
  In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc. 021023\_A
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk. 021023\_B
- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations. 060106\_Q
- The information contained herein is presented only as a guide for the applications of our products. No
  responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which
  may result from its use. No license is granted by implication or otherwise under any patent or patent rights of
  TOSHIBA or others. 021023\_c

9

• The products described in this document are subject to the foreign exchange and foreign trade laws. 021023\_E