

PBU401 - PBU407

4.0A BRIDGE RECTIFIER


NOT RECOMMENDED FOR NEW DESIGN USE GBU4005 - GBU410

- Low Forward Voltage Drop, High Current Capability
- Surge Overload Rating to 200A Peak
- Ideal for Printed Circuit Board Applications
- Case to Terminal Isolation Voltage 1500V
- Plastic Material: UL Flammability Classification Rating 94V-0
- UL Listed Under Recognized Component Index, File Number E95060
- Lead Free Finish, RoHS Compliant (Date Code 0514+) (Note 3)

Mechanical Data

Features

- Case: Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: As Marked on Case
- Mounting: Through Hole for #6 Screw
- Mounting Torque: 5.0 Inch-pounds Maximum
- Weight: 8.0 grams (approx.)
- Marking: Type Number



| PBU | | | | | | |
|----------------------|-------|-------|--|--|--|--|
| Dim | Min | Max | | | | |
| Α | 22.70 | 23.70 | | | | |
| В | 3.80 | 4.10 | | | | |
| С | 4.20 | 4.70 | | | | |
| D | 1.70 | 2.20 | | | | |
| E | 10.30 | 11.30 | | | | |
| G | 4.50 | 6.80 | | | | |
| н | 4.80 | 5.80 | | | | |
| J | 25.40 | _ | | | | |
| К | _ | 19.30 | | | | |
| L | 16.80 | 17.80 | | | | |
| М | 6.60 | 7.10 | | | | |
| N | 4.70 | 5.20 | | | | |
| Р | 1.20 | 1.30 | | | | |
| All Dimensions in mm | | | | | | |

Maximum Ratings and Electrical Characteristics @ T_A = 25°C unless otherwise specified


Single phase, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

| Characteristic | Symbol | PBU 401 | PBU 402 | PBU 403 | PBU 404 | PBU 405 | PBU 406 | PBU 407 | Unit |
|---|--|------------|------------|------------|------------|------------|------------|------------|------------------|
| Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage | V _{RRM} V _{RWM} V _R | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| RMS Reverse Voltage | V _{R(RMS)} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Average Rectified Output Current @ $T_C = 100^{\circ}C$ | lo | | • | | 4.0 | | | | Α |
| Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method) | I _{FSM} | | | | 200 | | | | А |
| Forward Voltage (per element) $@ I_F = 2.0A$ | V _{FM} | | | | 1.0 | | | | V |
| $\begin{tabular}{lllllllllllllllllllllllllllllllllll$ | | 10 1.0 | | | | | μA mA | | |
| I ² t Rating for Fusing (Note 2 |) l ² t | | | | 166 | | | | A ² s |
| Typical Thermal Resistance Junction to Case (Note 1 |) R _{0JC} | | | | 6.3 | | | | °C/W |
| Operating and Storage Temperature Range | T _j , T _{STG} | | | -(| 65 to +15 | 0 | | | °C |

Notes: 1. Thermal resistance junction to case mounted on heatsink.

2. Non-repetitive, for t > 1ms and t < 8.3ms.

3. EC Directive 2002/95/EC (RoHS) revision 13.2.2003. Glass and High Temperature Solder Exemptions Applied, see EU Directive Annex Notes 5 and 7.

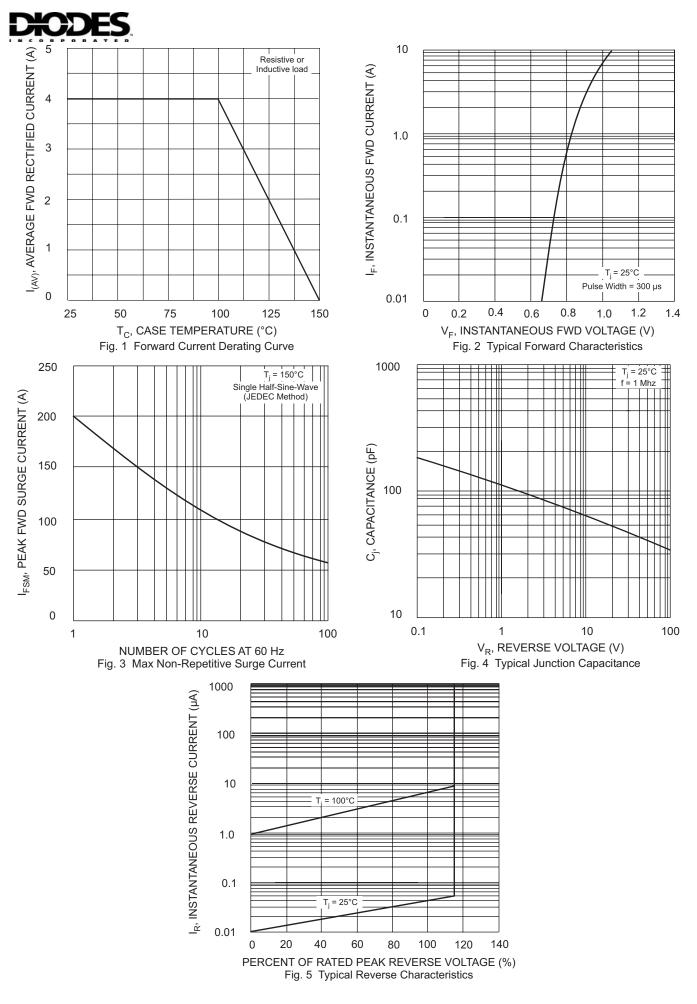



Ordering Information (Note 4)

| Device | Packaging | Shipping | | | |
|--------|-----------|-----------|--|--|--|
| PBU401 | PBU | 0.5K Bulk | | | |
| PBU402 | PBU | 0.5K Bulk | | | |
| PBU403 | PBU | 0.5K Bulk | | | |
| PBU404 | PBU | 0.5K Bulk | | | |
| PBU405 | PBU | 0.5K Bulk | | | |
| PBU406 | PBU | 0.5K Bulk | | | |
| PBU407 | PBU | 0.5K Bulk | | | |

Notes: 4. For packaging details, visit our website at http://www.diodes.com/datasheets/ap2008.pdf

IMPORTANT NOTICE

Diodes, Inc. and its subsidiaries reserve the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. Diodes, Inc. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

The products located on our website at **www.diodes.com** are not recommended for use in life support systems where a failure or malfunction of the component may directly threaten life or cause injury without the expressed written approval of Diodes Incorporated.