



#### SURFACE MOUNT SWITCHING DIODE

#### **Features**

- Fast Switching Speed
- Surface Mount Package Ideally Suited for Automated Insertion
- For General Purpose Switching Applications
- High Reverse Breakdown Voltage
- Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)
- Qualified to AEC-Q101 Standards for High Reliability

#### **Mechanical Data**

- Case: SOD123
- Case Material: Molded Plastic.
  UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Solderable per MIL-STD-202, Method 208 Lead Free Plating (Matte Tin Finish Annealed over Alloy 42 Leadframe)
- Polarity: Cathode Band
- Type Code: BAV19W: A8 or T2 or T3 BAV20W: T2 or T3
  - BAV21W: T3
- Weight: 0.01 grams (Approximate)



### Ordering Information (Note 5)

Part Number	Compliance	Case	Packaging					
BAV19W-7-F	BAV19W-7-F Commercial SOD123 3,000/Tape and Reel							
BAV20W-7-F	Commercial	SOD123	3,000/Tape and Reel					
BAV20WQ-7-F (Note 4)	BAV20WQ-7-F (Note 4) Automotive SOD123 3,000/Tape and Reel							
BAV21W-7-F	Commercial	SOD123	3,000/Tape and Reel					
BAV21WQ-7-F (Note 4)	BAV21WQ-7-F (Note 4) Automotive SOD123 3,000/Tape and Reel							
Notes: 1. No purposely added lead. Fully EU D	1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.							

No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
 See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and


Lead-free.

3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

4. Automotive products are AEC-Q101 qualified and are PPAP capable. Automotive, AEC-Q101 and standard products are and thermally the same, except where specified. For more information, please refer to https://www.diodes.com/quality/product-compliance-definitions/.

5. For packaging details, go to our website at http://www.diodes.com/products/packages.html.

# **Marking Information**



XX = Product Type Marking Code (See Page 1) YM = Date Code Marking Y = Year (ex: F = 2018)

M = Month (ex: 9 = September)

Date Code K	ley														
Year	1998	1999	2000		2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022
Code	J	K	L		Z	А	В	С	D	E	F	G	Н	J	K
Month	Jan	Fel	b	Mar	Apr	May	Ju	n	Jul	Aug	Sep	Oc	t I	Nov	Dec
Code	1	2		3	4	5	6		7	8	9	0		Ν	D



## Maximum Ratings (@T<sub>A</sub> = +25°C, unless otherwise specified.)

Characteristic		Symbol	BAV19W	BAV20W	BAV21W	Unit
Non-Repetitive Peak Reverse Voltage	V <sub>RM</sub>	120	200	250	V	
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	100	150	200	V
RMS Reverse Voltage		V <sub>R(RMS)</sub>	71	106	141	V
Forward Continuous Current (Note 6)	I <sub>FM</sub>		400		mA	
Average Rectified Output Current (Note 6)	lo	200			mA	
Non-Repetitive Peak Forward Surge Current	I <sub>FSM</sub>	2.5 0.5			А	
Repetitive Peak Forward Surge Current	I <sub>FRM</sub>	625				

## **Thermal Characteristics**

Characteristic	Symbol	Value	Unit
Power Dissipation (Note 7)	PD	250	mW
Thermal Resistance Junction to Ambient Air (Note 7)	R <sub>0JA</sub>	500	°C/W
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-65 to +150	0°


# Electrical Characteristics (@T<sub>A</sub> = +25°C, unless otherwise specified.)


Reverse Breakdown Voltage (Note 8)BAV19W BAV20W BAV21W120 V(BR)R120 200 250VIR = 100µAForward Voltage $V_{FM}$ $ 1.0$ $1.25$ VIF = 100mA IF = 200mAForward Voltage $V_{FM}$ $ 1.0$ $1.25$ VIF = 200mAPeak Reverse Current @ Rated DC Blocking Voltage (Note 8) $I_{RM}$ $ 100$ $15$ $nA$ $µA$ $T_{J}$ = +25°CTotal Capacitance $C_T$ $ 5.0$ $pF$ $V_R$ = 0, f = 1.0MHzReverse Recovery Time $t_{RR}$ $ 50$ $ns$ $I_F$ = $I_R$ = $30mA$ ,	Characteristic		Symbol	Min	Max	Unit	Test Condition
Forward Voltage $V_{FM}$ -1.25 $V$ $I_F = 200 \text{mA}$ Peak Reverse Current @ Rated DC Blocking Voltage (Note 8) $I_{RM}$ - $100$ $nA$ $T_J = +25^{\circ}\text{C}$ Total Capacitance $C_T$ - $5.0$ $pF$ $V_R = 0, f = 1.0 \text{MHz}$ Reverse Recovery Time $t_{RM}$ - $50$ $ns$ $I_F = I_R = 30 \text{mA},$	<b>3</b> ( )	BAV20W	V <sub>(BR)R</sub>	200	_	V	I <sub>R</sub> = 100μA
@ Rated DC Blocking Voltage (Note 8)IRM—15 $\mu$ AT_J = +100°CTotal CapacitanceCT—5.0pFV <sub>R</sub> = 0, f = 1.0MHzReverse Recovery Timetop—50psIF = I <sub>R</sub> = 30mA,	Forward Voltage		V <sub>FM</sub>	—	-	V	
Reverse Recovery Time $I_F = I_R = 30 \text{ mA},$			I <sub>RM</sub>	_			-
	Total Capacitance		CT		5.0	pF	V <sub>R</sub> = 0, f = 1.0MHz
IRR = 0.1 x I <sub>R</sub> , R <sub>L</sub> = 10	Reverse Recovery Time		t <sub>RR</sub>	_	50	ns	$I_F = I_R = 30mA,$ $I_{RR} = 0.1 \times I_R, R_L = 100W$

7. Part mounted on FR-4 PC board with minimum recommended pad layout, which can be found on our website at <a href="http://www.diodes.com/package-outlines.html">http://www.diodes.com/package-outlines.html</a>.

8. Short duration pulse test used to minimize self-heating effect.



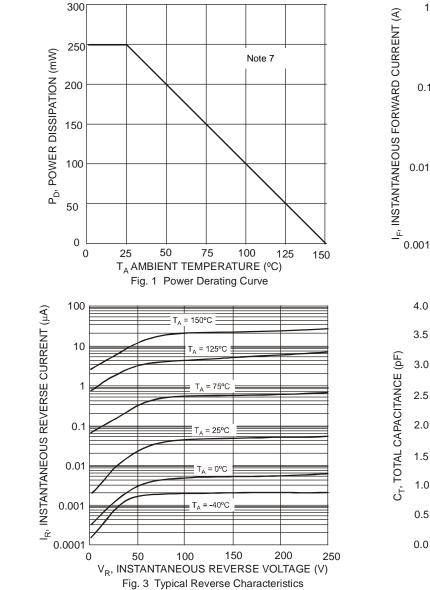


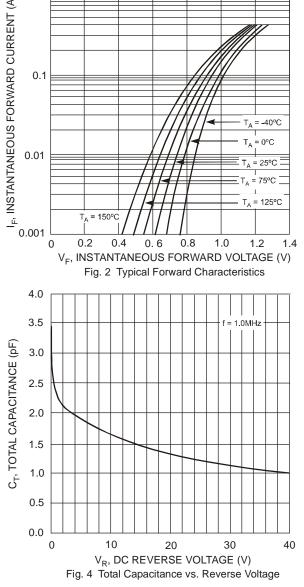



## **Package Outline Dimensions**

Please see http://www.diodes.com/package-outlines.html for the latest version.

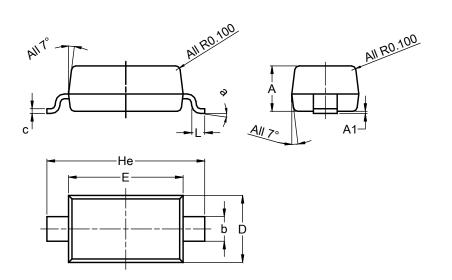


SOD123									
Dim									
Α	1.00	1.35	1.05						
A1	0.05								
b	0.52	0.62	0.57						
C	0.10	0.15	0.11						
D	1.40	1.70	1.55						
Е	2.55	2.85	2.65						
He	3.55	3.85	3.65						
L	0.25	0.40	0.30						
а	0°	8º							
All I	All Dimensions in mm								

### **Suggested Pad Layout**

Please see http://www.diodes.com/package-outlines.html for the latest version.



SOD123



Dimensions	Value (in mm)
Х	0.900
X1	4.050
Y	0.950



#### IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

#### LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
  - 1. are intended to implant into the body, or
  - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2018, Diodes Incorporated

www.diodes.com