
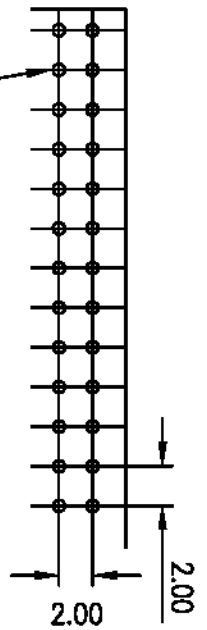
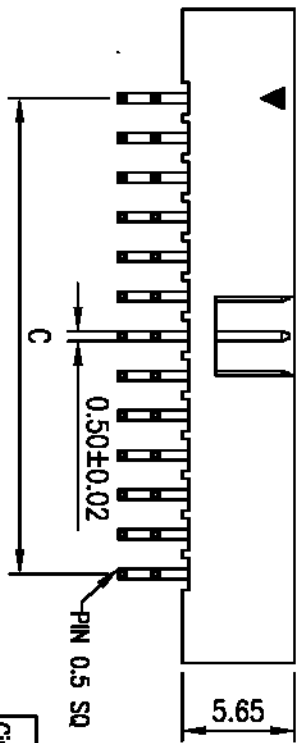




RoHS compliant

# 2.0mm (.079") Box Header

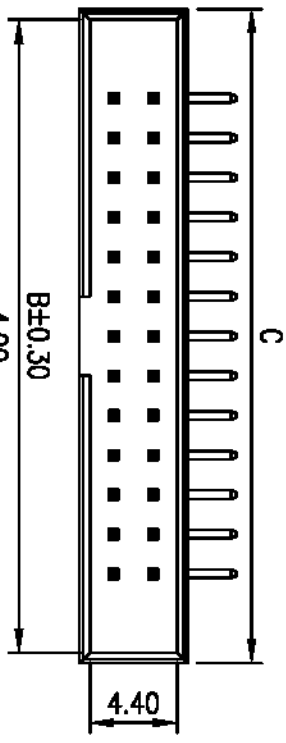

## Ordering Information

YY-4750-XXRX



## Features:

- \* Available in 06 through 64 Circuits
- \* Material: P.B.T U194-V0
- \* Accepts YY-1970-HXX Series Housing
- \* 0.5mm(.020") Square Pin
- \* Pin Material: Brass/Gold-Plated

## Specifications:

- \* Pitch Between Poles 2.54mm
- \* Rated Voltage 250V AC,DC
- \* Rated Current 1A
- \* Withstand Voltage 500V AC/minute
- \* Insulation Resistance 1000M Ohms/min
- \* Temperature Range -55C~+105C

Circuits	Part No	Dimension mm		
		A	B	C
2X3	YY-4750-06R	4.00	12.10	13.20
2X4	YY-4750-08R	6.00	14.10	15.20
2X5	YY-4750-10R	8.00	16.10	17.20
2X6	YY-4750-12R	10.00	18.10	19.20
2X7	YY-4750-14R	12.00	20.10	21.20
2X8	YY-4750-16R	14.00	22.10	23.20
2X10	YY-4750-20R	18.00	26.10	27.20
2X11	YY-4750-22R	20.00	28.10	29.20
2X12	YY-4750-24R	22.00	30.10	31.20



Circuits	Part No	Dimension mm		
		A	B	C
2X13	YY-4750-26R	24.00	32.10	33.20
2X15	YY-4750-30R	28.00	36.10	37.20
2X16	YY-4750-32R	30.00	38.10	39.20
2X17	YY-4750-34R	32.00	40.10	41.20
2X20	YY-4750-40R	38.00	46.10	47.20
2X22	YY-4750-44R	42.00	50.10	51.20
2X25	YY-4750-50R	48.00	56.10	57.20
2X30	YY-4750-60R	58.00	66.10	67.20
2X34	YY-4750-68R	66.00	74.10	75.20

EDITION	DATE	MODIFY	VIEW		毅耀實業股份有限公司 YOUNG YAK ENTERPRISE CO.,LTD. TEL:886-2-2999-9629 FAX:886-2-2999-0575	DRAW BY	AUDITING	APPROVAL	DATE	DWG NO	TOLERANCE
A0	2004.08.06	DRAWING									





RoHS compliant

# 2.0mm (.079") Box Header

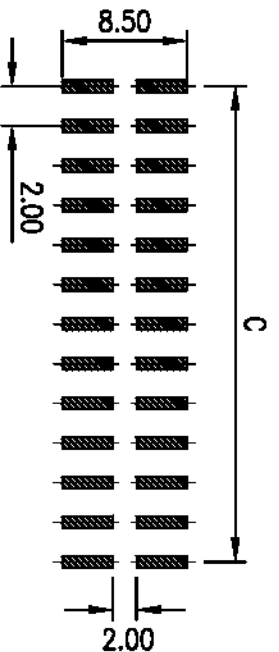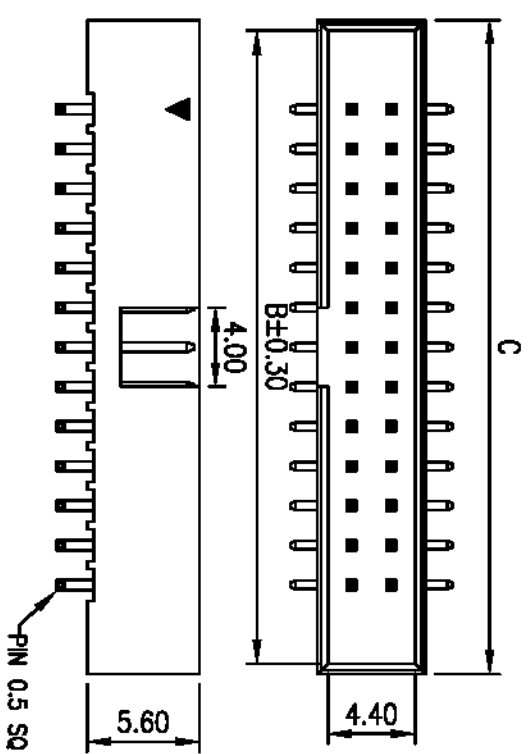

## Ordering Information

YY-4750-SXXXS

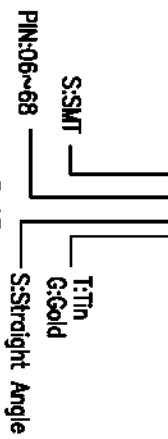

## Features:

- \* Available in 06 through 64 Circuits
- \* Material: P.B.T UL94-V0
- \* Accepts YY-1970-HXX Series Housing
- \* 0.5mm(.020") Square Pin
- \* Pin Material: Brass/Gold-Plated

## Specifications:

- \* Pitch Between Poles 2.54mm
- \* Rated Voltage 250V AC,DC
- \* Rated Current 1A
- \* Withstand Voltage 500V AC/minute
- \* Insulation Resistance 1000M Ohms/min
- \* Temperature Range -55C~+105C

Circuits	Part No	Dimension mm		
		A	B	C
2X3	YY-4750-S06	4.00	12.10	13.20
2X4	YY-4750-S08	6.00	14.10	15.20
2X5	YY-4750-S10	8.00	16.10	17.20
2X6	YY-4750-S12	10.00	18.10	19.20
2X7	YY-4750-S14	12.00	20.10	21.20
2X8	YY-4750-S16	14.00	22.10	23.20
2X10	YY-4750-S20	18.00	26.10	27.20
2X11	YY-4750-S22	20.00	28.10	29.20
2X12	YY-4750-S24	22.00	30.10	31.20



Circuits	Part No	Dimension mm		
		A	B	C
2X13	YY-4750-S26	24.00	32.10	33.20
2X15	YY-4750-S30	28.00	36.10	37.20
2X16	YY-4750-S32	30.00	38.10	39.20
2X17	YY-4750-S34	32.00	40.10	41.20
2X20	YY-4750-S40	38.00	46.10	47.20
2X22	YY-4750-S44	42.00	50.10	51.20
2X25	YY-4750-S50	48.00	56.10	57.20
2X30	YY-4750-S60	58.00	66.10	67.20
2X34	YY-4750-S68	66.00	74.10	75.20

EDITION	DATE	MODIFY	VIEW	YOUNG YAK ENTERPRISE CO.,LTD.	DRAW BY	AUDITING	APPROVAL	DATE	DWG NO	TOLERANCE
A0	2004.08.06	DRAWING		毅耀實業股份有限公司 YOUNG YAK ENTERPRISE CO.,LTD.	Art Serth	JEFF	Jessica	2004.08.06	YY-4750-SXXXS	0 ±0.30
				TEL:886-2-2999-9629 FAX:886-2-2999-0575						.00 ±0.20





RoHS compliant

# 2.0mm (.079") Box Header

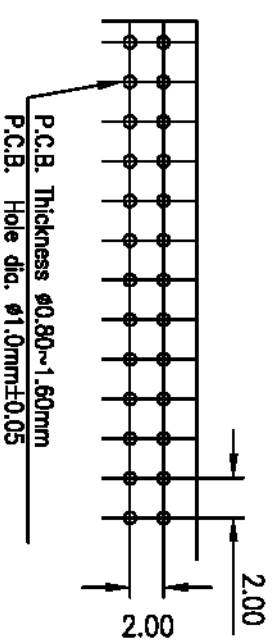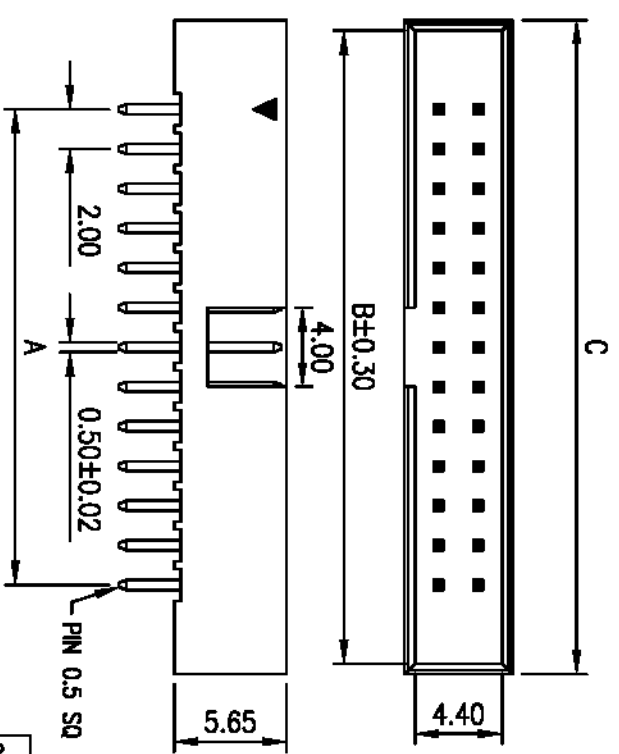

## Ordering Information

YY-4750-XXSX



## Features:

- \* Available in 06 through 64 Circuits
- \* Material: P.B.T UL94-V0
- \* Accepts YY-1970-HXX Series Housing
- \* 0.5mm(.020") Square Pin
- \* Pin Material: Brass/Gold-Plated

## Specifications:

- \* Pitch Between Poles 2.54mm
- \* Rated Voltage 250V AC,DC
- \* Rated Current 1A
- \* Withstand Voltage 500V AC/minute
- \* Insulation Resistance 1000M Ohms/Min
- \* Temperature Range -55°C~+105°C

Circuits	Part No	Dimension mm		
		A	B	C
2X3	YY-4750-06S	4.00	12.10	13.20
2X4	YY-4750-08S	6.00	14.10	15.20
2X5	YY-4750-10S	8.00	16.10	17.20
2X6	YY-4750-12S	10.00	18.10	19.20
2X7	YY-4750-14S	12.00	20.10	21.20
2X8	YY-4750-16S	14.00	22.10	23.20
2X10	YY-4750-20S	18.00	26.10	27.20
2X11	YY-4750-22S	20.00	28.10	29.20
2X12	YY-4750-24S	22.00	30.10	31.20

Circuits	Part No	Dimension mm		
		A	B	C
2X13	YY-4750-26S	24.00	32.10	33.20
2X15	YY-4750-30S	28.00	36.10	37.20
2X16	YY-4750-32S	30.00	38.10	39.20
2X17	YY-4750-34S	32.00	40.10	41.20
2X20	YY-4750-40S	38.00	46.10	47.20
2X22	YY-4750-44S	42.00	50.10	51.20
2X25	YY-4750-50S	48.00	56.10	57.20
2X30	YY-4750-60S	58.00	66.10	67.20
2X34	YY-4750-68S	66.00	74.10	75.20

EDITION	DATE	MODIFY	VIEW		<b>毅耀實業股份有限公司</b> YOUNG YAK ENTERPRISE CO.,LTD. TEL:886-2-2999-9629 FAX:886-2-2999-0575	DRAW BY	AUDITING	APPROVAL	DATE	DWG NO	TOLERANCE
A0	2004.08.06	DRAWING									

