



CUSTOMER COPY FOR REFERENCE ONLY

Surface ISO 1301	tolerance ISO R 406 ISO R 1109		scale 5:1	max. temp. SEE NOTE 1
				min. temp. SEE NOTE 1
Stamp part no. / rev. / lot = area indicated by X		max. temp.		
date 88 07 26	name HP	EURO QUICKIE HEADER STRAIGHT 0.76 $\mu$ m/30 $\mu$ inch GXT.		
lot 880801	signature P. Pignatelli	DU PONT		
type 880801		DU PONT CONNECTOR SYSTEMS		
A 36891	89 07 21	PGR	71931	A 213 1 of 2
rev. no.	date	des. by	substitutes	part. no. 5039

PRODUCT N°	N° OF POS	DIM "A"	DIM "B"	DIM "C"	DIM "D"	
71931	- X06	2 × 3	5.08 2000	13.15 5177	22.86 9000	26.92 1.0598
	- X08	2 × 4	7.62 3000	15.69 6177	25.40 10000	29.46 1.1598
	- X10	2 × 5	10.16 4000	18.23 7177	27.96 11000	32.00 1.2598
	- X14	2 × 7	15.24 6000	23.31 9177	33.02 13000	37.08 1.4598
	- X16	2 × 8	17.78 7000	25.85 10177	35.58 14000	39.62 1.5598
	- X18	2 × 9	20.32 8000	28.39 11177	38.10 15000	42.16 1.6598
	- X20	2 × 10	22.86 9000	30.93 12177	40.64 16000	44.70 1.7598
	- X26	2 × 13	30.48 12000	38.55 15177	48.26 19000	52.32 2.0598
	- X34	2 × 17	40.64 16000	48.71 19177	58.42 23000	62.48 2.4598
	- X40	2 × 20	48.26 19000	56.33 22177	66.04 26000	70.10 2.7598
- X44	2 × 22	53.34 21000	61.41 24177	71.12 28000	75.18 2.9598	
- X50	2 × 25	60.96 24000	69.03 27177	78.74 31000	82.80 3.2598	
- X60	2 × 30	73.66 29000	81.73 32177	91.44 36000	95.50 3.7598	
71931	- X64	2 × 32	78.74 31000	86.81 34177	96.52 38000	100.58 3.9598

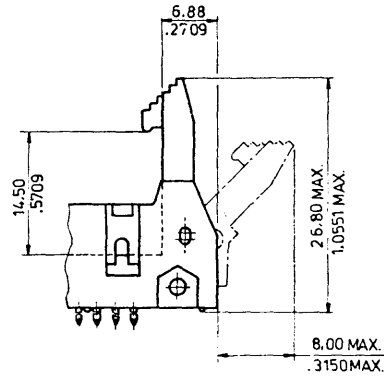


STANDARD LATCH

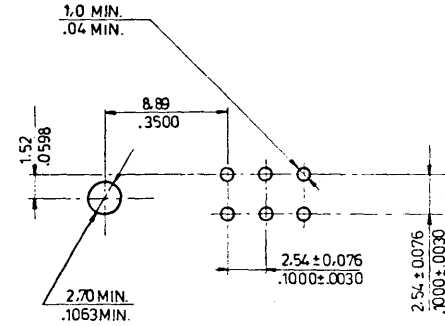

RECOMMENDED HOLE PATTERN

NOTES:

- MATERIAL : CONTACT : PHOSPHOR BRONZE.  
PLATING : CONTACT AREA 0.76µm/30µinch GX  
OVER 1.27µm/50µinch Ni  
SOLDER SIDE :  
TIN LEAD OVER NICKEL.  
PLASTIC PARTS: 30% GLASS FILLED  
POLYESTER FLAME RETARDANT  
PER UL 94-V0.  
COLOR : GREY.
- THIS POLARIZING FEATURE DOES NOT EXIST ON DASHES -X06,-X08,-X10,-X14.
- THIS POLARIZING SLOT DOES NOT EXIST ON DASHES -X06 AND -X08.
- THIS FEATURE DOES NOT EXIST ON PRODUCTS 2X3 THRU 2X17.



LOW PROFILE LATCH

71931	5YY		●			●	
	-4YY		●			●	
	-3YY		●		●		
	-2YY	●				●	
	-1YY	●			●		
71931	-0YY	●			●		
PRODUCT CODE	2.90		4.50		WITHOUT LATCH	WITH STANDARD LATCH	WITH LOW PROFILE LATCH
	1142		.1772		EJECTOR LATCH		
P:LENGTH		DIM."L"					

CUSTOMER COPY FOR REFERENCE ONLY

ISO 1302	tolerance ISO R 1106 ISO R 1101					SEE NOTE 1
						SEE NOTE 1
		stamp part no. / no. for in stock indicated by X	date	name	name	
		dr: 880726	date	EURO QUICKIE	EURO QUICKIE	
		chr: 880801	date	HEADER STRAIGHT	HEADER STRAIGHT	
		app: 880801	date	0.76µm/30µinch GTX	0.76µm/30µinch GTX	
			date	71931	71931	
A 16891	09 07 21	PSR	DU PONT CONNECTOR SYSTEMS			213
ref. no.	date	of issue by	subcontractor	reference no.	5039	2-2