

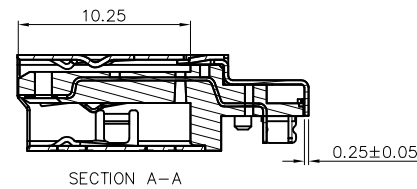
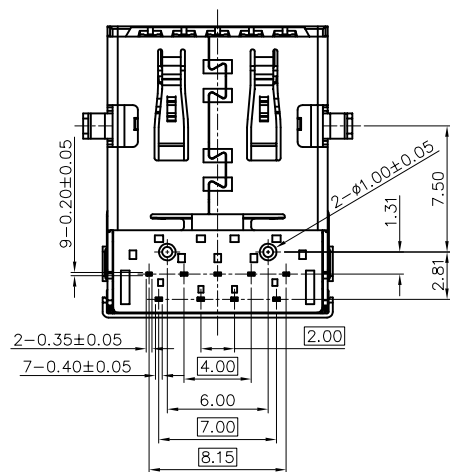
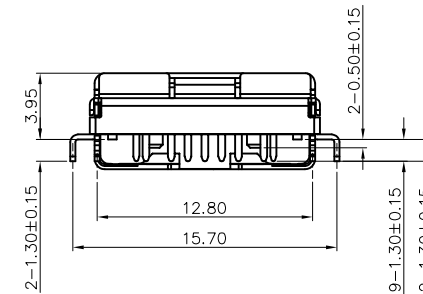
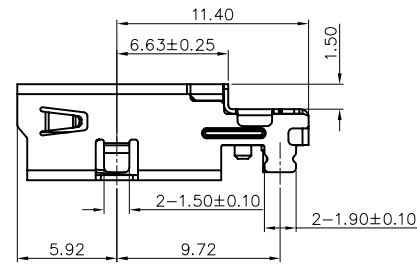


RECOMMENDED PCB LAYOUT (COMPONENT SIDE)
(TOLERANCE: ±0.05)

- NOTES:
1.MATERIAL:
1.1 HOUSING: SEE TABLE
1.2 CONTACTS: SEE TABLE
1.3 SHELL: SEE TABLE
2.FINISH:
2.1 CONTACT: SEE TABLE
2.2 SHELL: SEE TABLE
3.THE CONNECTOR IS RoHS COMPLIANT. AND MEET USB3.0 GEN 1 DATA TRANSFER RATE REQUIREMENT
4.DATE CODE: XXXXXX
YEAR _____
MONTH _____ FACTORY _____
DATE _____
5.SPEC PLS. REFER TO PS-55928-XXXXX-XXX(ASUS)
6.PACKING REFER TO 30127-XXXXX-XX-TRP
7.P/N: 30127- 009 0 X - XXX

CKTS _____
PACKING: _____
0: TAPE&REEL _____
PLATING:
001: BLUE
2: GOLD FLASH ON CONTACT AREA

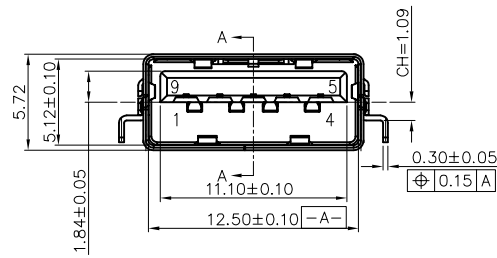

3D VIEW

No.	Part Name	Q'TY	Material	Finish
1	HOUSING	1	PA9T+GF	UL 94V-0
2	SHELL	1	STAINLESS STEEL(SUS201)	50u" MIN. NICKEL PLATING
3	TERMINAL	9	PHOSPHOR BRONZE	50u" MIN. NI UNDER PLATED OVER ALL CONTACT AREA: REFER TO P/N SOLDER TAILS:120u" MIN. MATTE TIN PLATED
4	BACK SHELL	1	STAINLESS STEEL(SUS201)	50u" MIN. NICKEL PLATING

Pin #	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

一般公差
TOLERANCES
X. ±0.5 .XX ±0.15
.X ±0.25 .XXX ±0.1
ANGLES ±2°

宏致電子股份有限公司
Aces Electronics Co.,Ltd.

品名 (TITLE)
USB3.0 STD SINK A TYPE
T/H R/A CH=1.09mm

圖號 (DWG.NO)
30127-XXXXX-XXX

檢驗尺寸標示
SYMBOLS INDICATE CLASSIFICATION DIMENSION
 MARK IS CRITICAL DIM.
 MARK IS MAJOR DIM.

表面處理 (FINISH)
-:-

比例 (SCALE)
-:-

單位 (UNITS)
mm

製圖 (DR)
17/02/22
TINA

審核 (CHKD)
DAVID

核准 (APPD)
JACK

張數 (SHEET)
1 OF 1

SIZE
A4

REV
A