

MultiModem® rCell

Intelligent HSPA Wireless Router




The MultiModem® rCell intelligent HSPA wireless router offers standards-based tri-band HSPA performance via the integrated cellular modem. This ready-to-deploy, standalone router integrates seamlessly with virtually any application. The intelligent embedded operating system allows for automatic/persistent connectivity for mission-critical applications and enhanced machine-to-machine (M2M) functionality. The MultiModem rCell intelligent wireless router includes 10/100BaseT Ethernet and RS-232 serial connectivity and can be desktop or panel mounted.

Features

- Tri-band HSPA 7.2
- Quad-band GSM/GPRS/EDGE
- Models with GPS tracking capability
- NMEA-0183 V3.01 compliant GPS messages
- 10/100BaseT Ethernet LAN connectivity
- RS-232 port for connecting legacy equipment
- Embedded operating system for enhanced M2M functionality
- Stateful Packet Inspection firewall with packet filter rules
- Supports IPSec VPN tunnels for secure LAN-to-LAN access
- 3DES and AES encryption
- Built-in dynamic DNS client
- SMA antenna connector(s) and SIM socket
- Desktop or panel mounting
- FCC, Industry Canada, PTCRB and R&TTE certified
- Web-based management and configuration
- Two-year warranty

Benefits

- Intelligent Embedded OS
- Stateful Packet Inspection firewall
- Supports VPN connections
- Ethernet and RS-232 connectivity
- Carrier approved

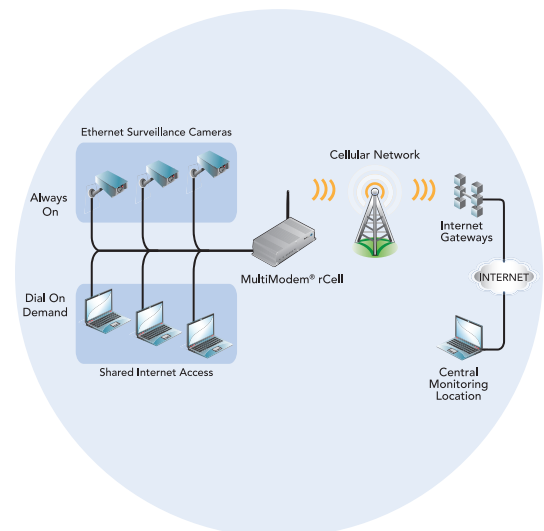

Highlights

Applications. The MultiModem rCell intelligent wireless router with HSPA support is ideal for highly data-intensive, mission-critical applications such as remote video surveillance, downloading large files or where there is a need for shared Internet access over a high-speed wireless connection. For asset tracking and fleet management applications, models with a dedicated GPS receiver are available.

Embedded OS for Enhanced M2M Connectivity. Multi-Tech's embedded operating system provides a web-based programming interface providing easy access to many of the advanced features offered by the MultiModem rCell.

For example, the router can be configured for one of three connectivity modes: always on – when powered on, the router automatically establishes a connection to the wireless network and will re-establish the data link if the connection is lost. Wake-up on ring/Caller ID – this setting allows the router to establish a data link when the router detects an incoming ring or when the router detects an incoming ring based on a particular Caller ID number. Dial-on-demand – when the router is configured for dial on demand, it will establish a data link when LAN activity is detected.

Secure VPN Connections. The MultiModem rCell intelligent wireless router uses the IPSec industry standard protocol, data encryption, and the Internet to provide high performance, secure VPN connections. For LAN-to-LAN connectivity, the MultiModem rCell wireless router utilizes the IPSec protocol to provide tunnels with strong 3DES or AES encryption using IKE and PSK key management. Sized appropriately for M2M applications with support for two concurrent VPN tunnels.

Reduces Development Time. The MultiModem rCell intelligent wireless router can make your existing and next generation device communication-ready without requiring any hardware changes to its design. It actually provides faster time-to-market because it relieves the burden and expense of obtaining PTCRB and RF approvals.

Multiple Interface Options. The MultiModem rCell intelligent wireless router is designed around multiple interface options including Ethernet and RS-232 serial interfaces, to provide you with seamless connectivity for your application. Each interface option offers unique features and benefits related to the technology it supports.

Comprehensive Service and Support. The Multi-Tech commitment to service means we provide a two-year product warranty and service that includes free technical support, 24-hour web site and ftp support.

Specifications

General Features

Quad-band GSM/GPRS/EDGE 850/900/1800/1900 MHz

Packet Data Features

HSPA: 7.2/UMTS/EDGE/GPRS

HSPA: 7.2M bps max. download, 5.76M bps max. upload

Frequency Bands

3G: 850/1900/2100 MHz

2G: 850/900/1800/1900 MHz

GPS

Position: 2.5 meters

Aquisition: Hot start 1 second; cold start 29 seconds avg.

Sensitivity: Tracking -161 dBm

Protocol: NMEA-0183 V3.01, GGA, GLL, GSA, GSV, RMC, VTG

Connectors

LAN: RJ-45, 10/100BaseT

RS-232 Data: DE-9 female, 921.6K bps max serial speed

RF & GPS Antenna: 50 ohm SMA female

Power: 2.5mm miniature screw

SIM: Standard 1.8V & 3V SIM receptacle

Power Requirements

9V to 32VDC

Physical Description

2.8" L x 7.0" W x 1.2" H; 11.5 oz.

(7.1 cm x 17.8 cm x 3.0 cm; 326g)

Environment

Operating: -22° to +140° F (-30° to +60° C)

Storage: -40° to +185° F (-40° to +85° C)

Humidity: 20% to 90% non-condensing

Approvals

CE Mark

EMC: FCC Part 15, 22, 24; EN 55022, EN 55024, EN 301 489-1, EN 301 489-3 (GPS models only), EN 301 489-7, EN 301 489-24, EN 301 511; RSS 132, 133, 102

Safety: cUL 60950-1, UL 60950-1; IEC 60950-1, AS/NZS60950-1

Network: PTCRB

Ordering Information

Product	Description	Region
MTCBA-H4-EN2-Px*	Intelligent HSPA 7.2 Router	Regional
MTCBA-H4-EN2-GP-Px*	Intelligent HSPA 7.2 Router (GPS)	Regional

Ordering Codes

-P1	Generic - Europe, Rogers, Telus
-P2	For AT&T Networks (USA)
-NAM	Includes US Style Power Plug
-EU	Includes Euro Style Power Plug
-GB/IE	Includes UK Style Power Plug

* Use ordering codes for specific build options. Go to www.multitech.com for detailed product model numbers.

Produced in the US of US and non-US components.

Features and specifications are subject to change without notice.

Trademarks / Registered Trademarks: MultiModem, Multi-Tech, and the Multi-Tech logo: Multi-Tech Systems, Inc. / All other products and technologies are the trademarks or registered trademarks of their respective holders.

World Headquarters

Tel: (763) 785-3500
(800) 328-9717

www.multitech.com

EMEA Headquarters

Multi-Tech Systems (EMEA)
United Kingdom

Tel: +(44) 118-959 7774