
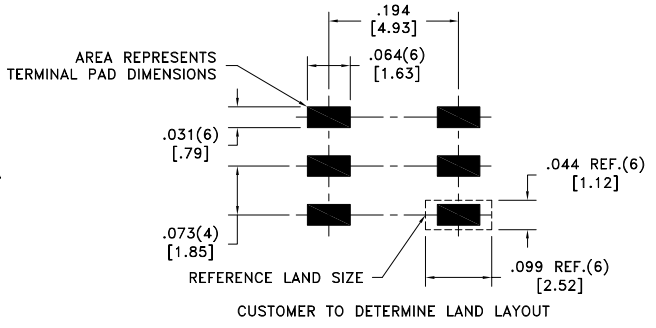
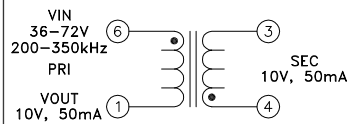


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

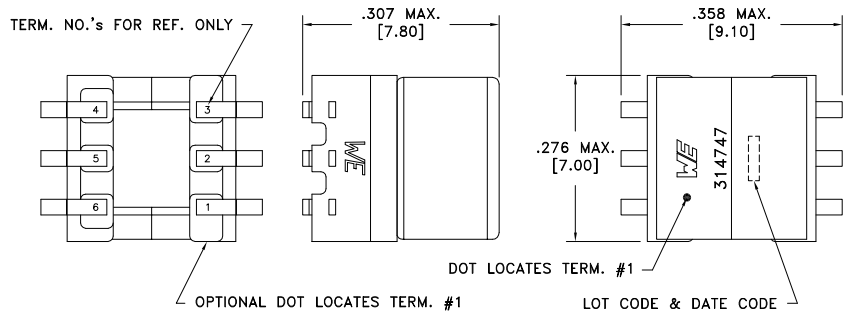

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	6-1 @20°C	0.184 ohms ±10%
D.C. RESISTANCE	4-3 @20°C	0.579 ohms ±15%
INDUCTANCE	6-1 100kHz, 100mVAC, Ls	33.0uH ±20%
SATURATION CURRENT	6-1 20%, rolloff from initial	540mA
LEAKAGE INDUCTANCE	6-1 tie(3+4), 200kHz, 100mVAC, Ls	105nH typ., 185nH max.
DIELECTRIC	1-3 2250VDC, 1 second	1800VDC, 1 minute
URNS RATIO	(4-3):(6-1)	1:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.


Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1:

- Basic insulation for a primary circuit at at working voltage of 100Vpeak, Overvoltage Category II, Pollution Degree 2. PRI to SEC, SEC to Core, PRI to Core
- Clause R.2 compliant

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications
		Method: Tape & Reel
		PKG-1021
		www.we-online.com/midcom
6B	10/15	
6A	9/15	SEE REVISION SHEET FOR REVISION LEVEL



Tolerances unless otherwise specified:
Angles: ±1°
Fractions: ±1/64
Decimals: ±.005 [.13]
Footprint: ±.005 [.13]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER

eiSos p/n: 750314747



PART NO.
750314747

SPECIFICATION SHEET 1 OF 1