


# W480EI-IM-A

Mini-ITX, LGA1200 socket for the 10<sup>th</sup> Gen CPU, W480E chipset, 2\*SO-DIMM.  
1\*PCIe x16, 2\*DP, DVI-D, LVDS/eDP, 2\*M.2 slot, USB Type C

## Features

- Two 260-pin SO-DIMM up to 64GB DDR4 2933/2666/2400/2133 MHz SDRAM.
- Supports 3 displays configuration by multiple interface: 2\*DP/ DVI-D /LVDS or eDP
- 7-year longevity supply
- Wide temperature range: 0~60°C

## Specifications

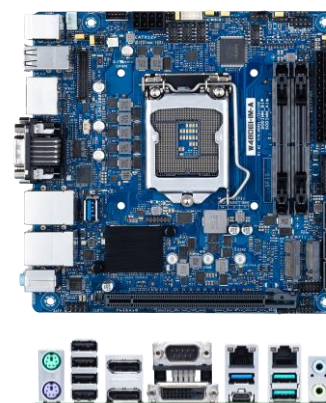


<b>Processor System</b>	CPU	LGA1200 Socket for The 10th Generation Intel® Xeon, Core™ i9/ i7/ i5/ i3 Processors Supports 14nm CPU Max. 95W TDP
	Chipset	Intel® W480E Chipset
<b>Memory</b>	Technology	DDR4 2933/2666/2400/2133 MHz (ECC support)
	Max.	Overall: 64GB, Per Module:32GB
	Socket	2 x SO-DIMM
<b>Display</b>	Display Port	2, Supports DP 1.4
	DVI-D	1
	eDP/LVDS	1 x Header (Support either eDP or LVDS ; switched by BIOS)
<b>Expansion Slot</b>	PCIe	1 x PCIe 3.0/2.0 x16 Slot *Bifurcation Support(16x to 8x+8x or 8x+4x+4x )
	M.2	1 x M.2 Socket 1 with E key, Type 2230 for WIFI/BT device (PCIe & CNVi) 1 x M.2 Socket 3 with M key, Type 2242/2260/2280(PCIe x4 & SATA mode)
<b>Ethernet</b>	Speed	10/100/1000 Mbps
	Controller	1 x Intel® I210AT, 1 x Intel® I219LM
	Teaming	Yes
	Connector	2 x RJ-45
<b>Audio</b>	Codec	Realtek ALC897 High Definition Audio
	Connector	Line-Out, Line-In
<b>Storage</b>	SATA port	3 x SATA Gen 3.0, Up to 6Gb/s
	M.2	1 x M.2 Socket 3 with M key, Type 2242/2260/2280(PCIe x4 & SATA mode)
<b>Rear I/O</b>	Display Port	2
	DVI-D	1
	USB3.2 Gen2	3 (2*Type A, 1*type C)
	USB3.2 Gen1	1 (type A)
	USB2.0	4 (Type A)
	Ethernet	2 x RJ45
	Serial Port	1 (RS232/422/485)
	Audio jack	2
	PS/2	1 x Keyboard, 1x Mouse
<b>Internal Connector</b>	Serial Port	4 x COM Header (1 x RS232/422/485, 3 x RS232)
	USB3.2 Gen1	1 x USB3.2 Gen1 Stick Connector 1 x Header Support Additional 2 x USB3.2 Gen1 Ports
	USB2.0	1 x Header Support Additional 2 x USB2.0 Ports
	CPU Fan	1 x Header (PWM Mode)
	Chassis Fan	1 x Header (PWM Mode)
	Disable ME	1 x Header
	LVDS eDP selection	1 x Header
	I <sup>2</sup> C	1 x Header
	Panel SW	1 x Header
	Front Panel Audio (AAFP)	1 x Header
	System Panel	1 x Header (10-1 Pin)
	SP/DIF	1 x Header
	Chassis Intrusion	1 x Header
	Speaker	1 x Header
	Clear CMOS	1 x Header
	LPC Debug	1 x Header
GPIO	1 x Header (8 Bit)	

# Specifications

<b>Internal Connector</b>	AT/ATX Select	1 x Header
	Power Connector	1 x 8-pin ATX Power Connector, 1 x 24-pin ATX Power Connector
	COM 1/2 Ring/ +5V/ +12V Selection	2 x Jumpers
<b>Watchdog Timer</b>	H/W	YES
<b>Security</b>	TPM	1 x SPI TPM header
<b>Power</b>	Power Type	both ATX mode and DC in (need an extra card)
	Voltage	DC in 12V
<b>Operating System</b>	Microsoft Windows	Windows® 10 (64bit ) / Win10 IoT Enterprise
	Linux	Ubuntu, RedHat Enterprise, Fedora Workstation, OpenSUSE
<b>Environment</b>	Operating Temperature	0~60° C
	Non-Operating Temperature	-40~85° C
	Relative Humidity	0%~85%
<b>Dimension</b>	Form Factor	Mini-ITX, 170 x 170 mm
<b>Certification</b>	Safety	CE, FCC

# Block Diagram

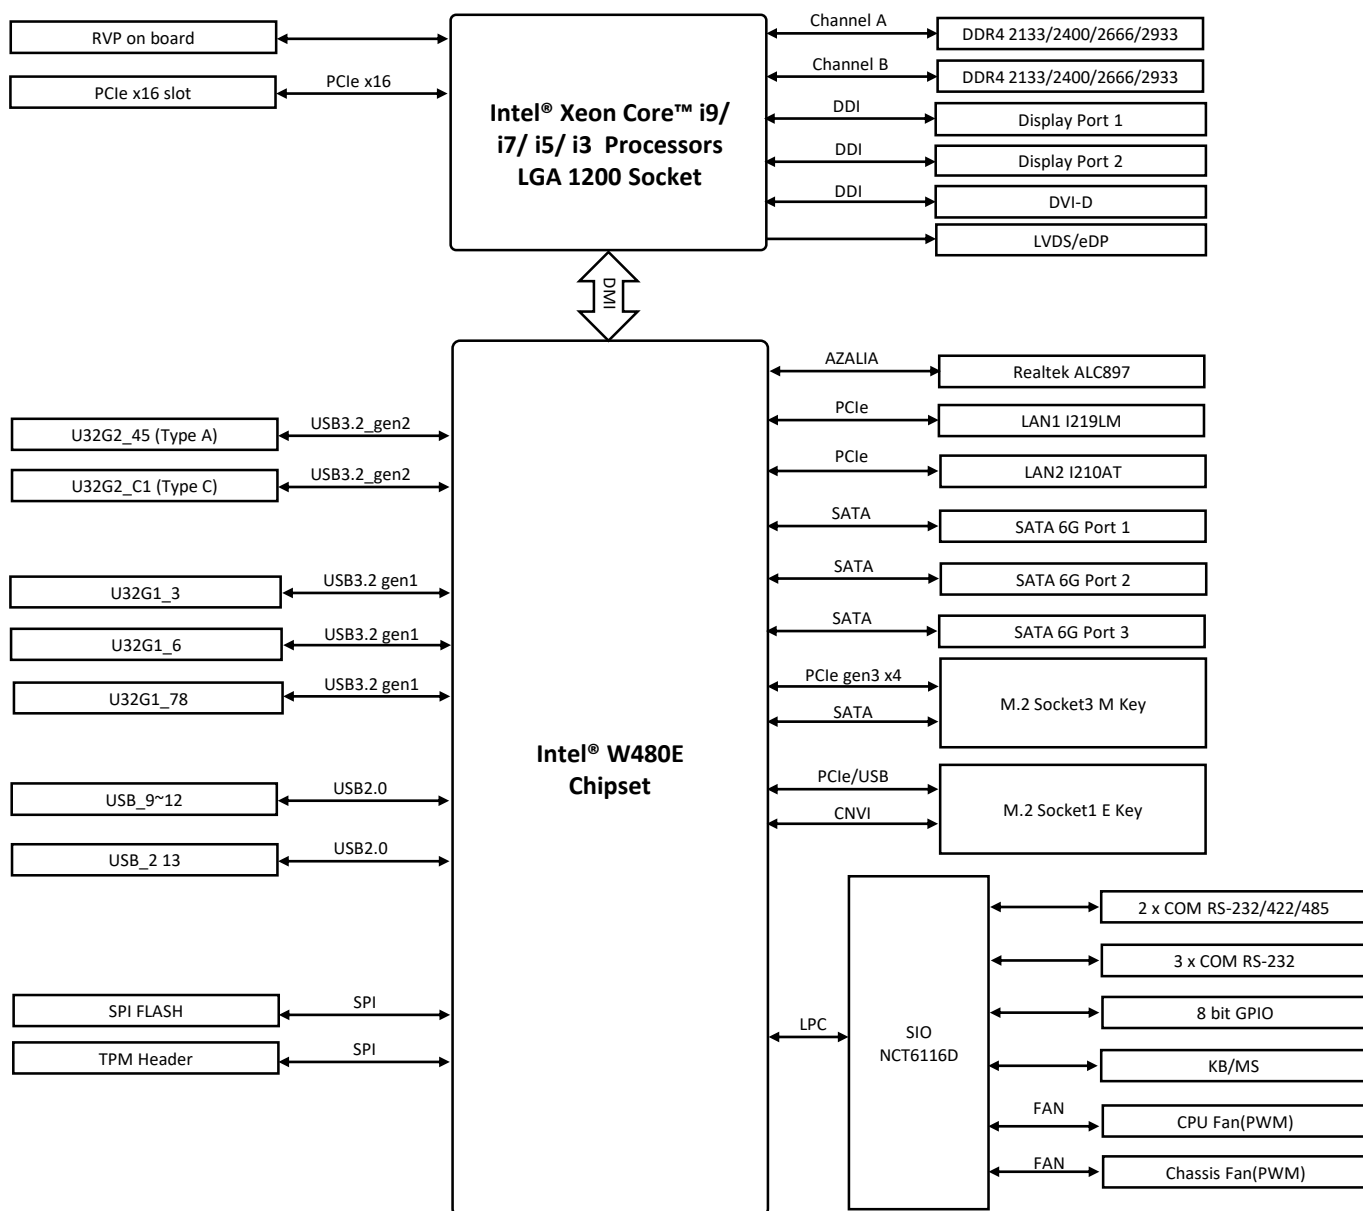

## Order Information

Model name	Part number	Description
W480EI-IM-A	90ME02D0*	LGA1200,W480E,DVI-D,2*DP,MB

\* The part number might vary for different regulations and package. Please consult the TPM in your region for exact 90PN.

## Packing List

Part number	Description	Quantity
13020*	IO shield	1
14013*	SATA 6G CABLE	1
13ME0*	Screw Pack	1
13ME0*	HEX pack	1

\* The part number might vary due to part number revision.