

MCT2M, MCT2EM, MCT210M, MCT271M

Phototransistor Optocouplers

Features

- UL recognized (File # E90700, Vol. 2)
- IEC60747-5-2 recognized (File # 102497)
 - Add option V (e.g., MCT2VM)


Applications

- Power supply regulators
- Digital logic inputs
- Microprocessor inputs


Description

The MCT2XXM series optoisolators consist of a gallium arsenide infrared emitting diode driving a silicon phototransistor in a 6-pin dual in-line package.

Schematic

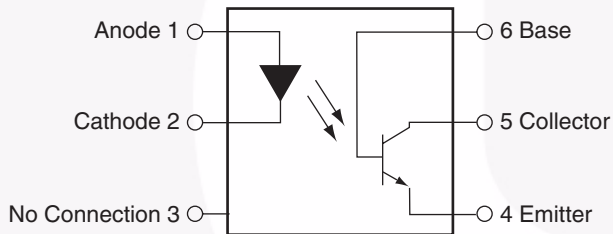

Package Outlines

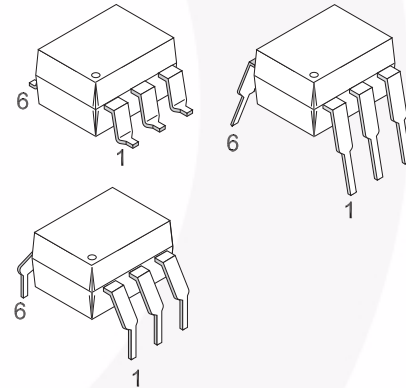

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

| Symbol | Parameter | Value | Units |
|---------------------|--|----------------|-------|
| TOTAL DEVICE | | | |
| T_{STG} | Storage Temperature | -40 to +150 | °C |
| T_{OPR} | Operating Temperature | -40 to +100 | °C |
| T_{SOL} | Lead Solder Temperature | 260 for 10 sec | °C |
| P_D | Total Device Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C | 250 | mW |
| | | 2.94 | mW/°C |
| EMITTER | | | |
| I_F | DC/Average Forward Input Current | 60 | mA |
| V_R | Reverse Input Voltage | 3 | V |
| $I_F(\text{pk})$ | Forward Current – Peak (300 μs , 2% Duty Cycle) | 3 | A |
| P_D | LED Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C | 120 | mW |
| | | 1.41 | mW/°C |
| DETECTOR | | | |
| I_C | Collector Current | 50 | mA |
| V_{CEO} | Collector-Emitter Voltage | 30 | V |
| P_D | Detector Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C | 150 | mW |
| | | 1.76 | mW/°C |

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise specified)**Individual Component Characteristics**

| Symbol | Parameter | Test Conditions | Device | Min. | Typ.* | Max. | Units |
|-----------------|-------------------------------------|---|----------------------------|------|-------|------|---------------|
| EMITTER | | | | | | | |
| V_F | Input Forward Voltage | $I_F = 20\text{mA}$ | MCT2M MCT2EM MCT271M | | 1.25 | 1.50 | V |
| | | $T_A = 0^\circ\text{C} - 70^\circ\text{C}$, $I_F = 40\text{mA}$ | MCT210M | | 1.33 | | |
| I_R | Reverse Leakage Current | $V_R = 3.0\text{V}$ | MCT2M MCT2EM MCT271M | | 0.001 | 10 | μA |
| | | $T_A = 0^\circ\text{C} - 70^\circ\text{C}$, $V_R = 6.0\text{V}$ | MCT210M | | | | |
| DETECTOR | | | | | | | |
| BV_{CEO} | Collector-Emitter Breakdown Voltage | $I_C = 1.0\text{mA}$, $I_F = 0$ | ALL | 30 | 100 | | V |
| | | $T_A = 0^\circ\text{C} - 70^\circ\text{C}$ | MCT210M | | | | |
| BV_{CBO} | Collector-Base Breakdown Voltage | $I_C = 10\mu\text{A}$, $I_F = 0$ | MCT2M MCT2EM MCT271M | 70 | 120 | | V |
| | | $T_A = 0^\circ\text{C} - 70^\circ\text{C}$ | MCT210M | 30 | | | |
| BV_{ECO} | Emitter-Collector Breakdown Voltage | $I_E = 100\mu\text{A}$, $I_F = 0$ | MCT2M MCT2EM MCT271M | 7 | 10 | | V |
| | | $T_A = 0^\circ\text{C} - 70^\circ\text{C}$ | MCT210M | 6 | 10 | | |
| I_{CEO} | Collector-Emitter Dark Current | $V_{CE} = 10\text{V}$, $I_F = 0$ | ALL | | 1 | 50 | nA |
| | | $V_{CE} = 5\text{V}$, $T_A = 0^\circ\text{C} - 70^\circ\text{C}$ | | | | 30 | μA |
| I_{CBO} | Collector-Base Dark Current | $V_{CB} = 10\text{V}$, $I_F = 0$ | ALL | | | 20 | nA |
| C_{CE} | Capacitance | $V_{CE} = 0\text{V}$, $f = 1\text{MHz}$ | ALL | | 8 | | pF |

*All typical $T_A = 25^\circ\text{C}$ **Isolation Characteristics**

| Symbol | Parameter | Test Conditions | Min | Typ* | Max | Units |
|-----------|--------------------------------|--|-----------|------|-----|----------|
| V_{ISO} | Input-Output Isolation Voltage | $f = 60\text{Hz}$, $t = 1 \text{ sec.}$ | 7500 | | | Vac(pk) |
| R_{ISO} | Isolation Resistance | $V_{I-O} = 500 \text{ VDC}$ | 10^{11} | | | Ω |
| C_{ISO} | Isolation Capacitance | | | 0.2 | 2 | pF |

*All typicals at $T_A = 25^\circ\text{C}$

Electrical Characteristics (Continued) ($T_A = 25^\circ\text{C}$ unless otherwise specified)**Transfer Characteristics**

| Symbol | Parameter | Test Conditions | Device | Min. | Typ.* | Max. | Unit |
|---------------------------|--|---|----------------------------|------|-------|------|---------------|
| DC CHARACTERISTICS | | | | | | | |
| CTR | Output Collector Current | $T_A = 0^\circ\text{C} - 70^\circ\text{C}$ | MCT210M | 150 | | | % |
| | | $I_F = 10\text{mA}, V_{CE} = 10\text{V}$ | MCT2M MCT2EM | 20 | | | |
| | | | MCT271M | 45 | | 90 | |
| | | | MCT210M | 50 | | | |
| $V_{CE(SAT)}$ | Collector-Emitter Saturation Voltage | $I_C = 2\text{mA}, I_F = 16\text{mA}$ | MCT2M MCT2EM MCT271M | | | 0.4 | V |
| | | $I_C = 16\text{mA}, I_F = 32\text{mA}, T_A = 0^\circ\text{C} - 70^\circ\text{C}$ | MCT210M | | | | |
| AC CHARACTERISTICS | | | | | | | |
| t_{on} | AC Characteristic Saturated Turn-on Time from 5V to 0.8V | $I_F = 15\text{mA}, V_{CC} = 5\text{V}, R_L = 2\text{k}\Omega, R_B = \text{Open (Fig. 11)}$ | MCT2M MCT2EM | | 1.1 | | μs |
| | | $I_F = 20\text{mA}, V_{CC} = 5\text{V}, R_L = 2\text{k}\Omega, R_B = 100\text{k}\Omega \text{ (Fig. 11)}$ | MCT2M MCT2EM | | 1.3 | | |
| t_{off} | Saturated Turn-off Time from SAT to 2.0 V | $I_F = 15\text{mA}, V_{CC} = 5\text{V}, R_L = 2\text{k}\Omega, R_B = \text{Open (Fig. 11)}$ | MCT2M MCT2EM | | 50 | | μs |
| | | $I_F = 20\text{mA}, V_{CC} = 5\text{V}, R_L = 2\text{k}\Omega, R_B = 100\text{k}\Omega \text{ (Fig. 11)}$ | MCT2M MCT2EM | | 20 | | |
| t_{on} | Turn-on Time | $I_F = 10\text{mA}, V_{CC} = 10\text{V}, R_L = 100\Omega$ | MCT2M MCT2EM | | 2 | | μs |
| t_{off} | Turn-off Time | $I_F = 10\text{mA}, V_{CC} = 10\text{V}, R_L = 100\Omega$ | MCT2M MCT2EM | | 2 | | μs |
| t_r | Rise Time | $I_F = 10\text{mA}, V_{CC} = 10\text{V}, R_L = 100\Omega$ | MCT2M MCT2EM | | 2 | | μs |
| t_f | Fall Time | $I_F = 10\text{mA}, V_{CC} = 10\text{V}, R_L = 100\Omega$ | MCT2M MCT2EM | | 1.5 | | μs |
| t_{on} | Saturated turn-on time | $I_F = 16\text{mA}, R_L = 1.9\text{k}\Omega, V_{CC} = 5\text{V (Fig. 11)}$ | MCT271M | | 1.0 | | μs |
| t_{off} | Saturated turn-off time (Approximates a typical TTL interface) | | | | 48 | | μs |
| t_{on} | Saturated turn-on time | $I_F = 16\text{mA}, R_L = 4.7\text{k}\Omega, V_{CC} = 5\text{V (Fig. 20)}$ | MCT271M | | 1.0 | | μs |
| t_{off} | Saturated turn-off time (Approximates a typical low power TTL interface) | | | | 98 | | μs |
| t_r | Saturated rise time | $I_F = 16\text{mA}, R_L = 560\Omega, V_{CC} = 5\text{V (Fig. 11, 12)}$ | MCT210M | | 1.0 | | μs |
| t_f | Saturated fall time | | | | 11 | | μs |
| $T_{PD(HL)}$ | Saturated propagation delay – HIGH to LOW | $I_F = 16\text{mA}, R_L = 2.7\text{k}\Omega \text{ (Fig. 11, 12)}$ | MCT210M | | 1.0 | | μs |
| $T_{PD(LH)}$ | Saturated propagation delay – LOW to HIGH | | | | 50 | | μs |
| t_r | Non-saturated rise time | $I_C = 2\text{mA}, V_{CC} = 5\text{V}, R_L = 100\Omega \text{ (Fig. 11)}$ | MCT210M | | 2 | | μs |
| t_f | Non-saturated fall time | | | | 2 | | μs |
| t_{on} | Non-saturated turn-on time | $I_C = 2\text{mA}, V_{CC} = 5\text{V}, R_L = 100\Omega \text{ (Fig. 20)}$ | MCT271M | | 2 | 7 | μs |
| t_{off} | Non-saturated turn-off time | | | | 2 | 7 | μs |

*All typicals at $T_A = 25^\circ\text{C}$

Safety and Insulation Ratings

As per IEC 60747-5-2, this optocoupler is suitable for “safe electrical insulation” only within the safety limit data. Compliance with the safety ratings shall be ensured by means of protective circuits.

| Symbol | Parameter | Min. | Typ. | Max. | Unit |
|------------|---|--------|-----------|------|------------|
| | Installation Classifications per DIN VDE 0110/1.89 Table 1 | | | | |
| | For Rated Main Voltage < 150Vrms | | I-IV | | |
| | For Rated Main voltage < 300Vrms | | I-IV | | |
| | Climatic Classification | | 55/100/21 | | |
| | Pollution Degree (DIN VDE 0110/1.89) | | 2 | | |
| CTI | Comparative Tracking Index | 175 | | | |
| V_{PR} | Input to Output Test Voltage, Method b, $V_{IORM} \times 1.875 = V_{PR}$, 100% Production Test with $t_m = 1$ sec, Partial Discharge < 5pC | 1594 | | | V_{peak} |
| | Input to Output Test Voltage, Method a, $V_{IORM} \times 1.5 = V_{PR}$, Type and Sample Test with $t_m = 60$ sec, Partial Discharge < 5pC | 1275 | | | V_{peak} |
| V_{IORM} | Max. Working Insulation Voltage | 850 | | | V_{peak} |
| V_{IOTM} | Highest Allowable Over Voltage | 6000 | | | V_{peak} |
| | External Creepage | 7 | | | mm |
| | External Clearance | 7 | | | mm |
| | Insulation Thickness | 0.5 | | | mm |
| RIO | Insulation Resistance at T_s , $V_{IO} = 500V$ | 10^9 | | | Ω |

Typical Performance Curves

Fig. 1 LED Forward Voltage vs. Forward Current

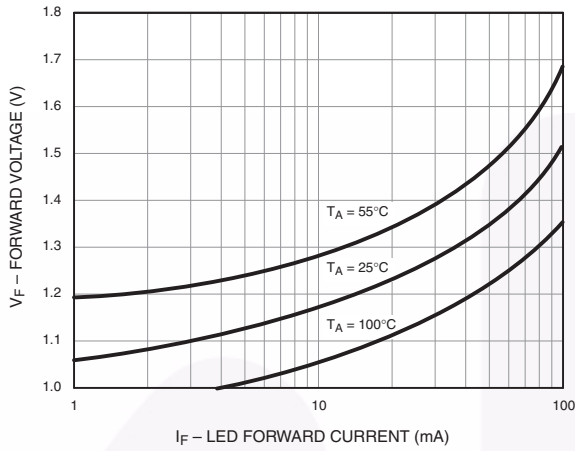


Fig. 2 Normalized CTR vs. Forward Current

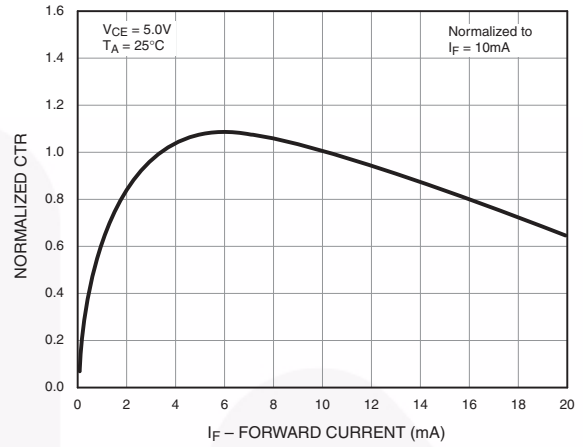


Fig. 3 Normalized CTR vs. Ambient Temperature

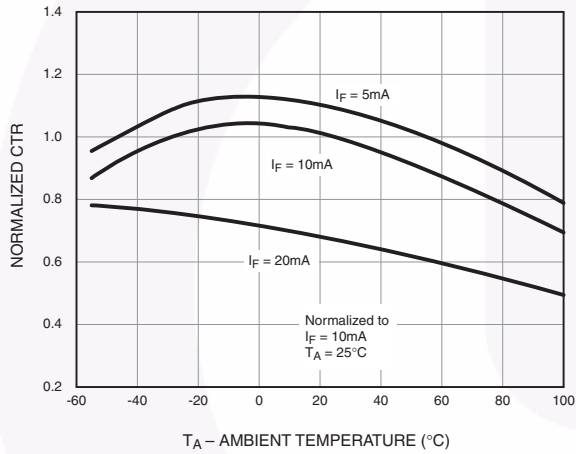


Fig. 4 CTR vs. RBE (Unsaturated)

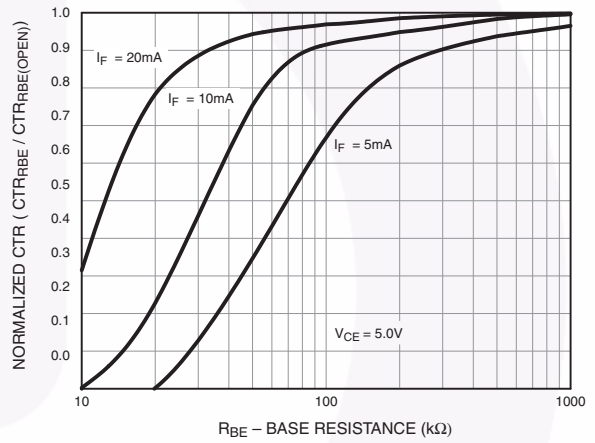


Fig. 5 CTR vs. RBE (Saturated)


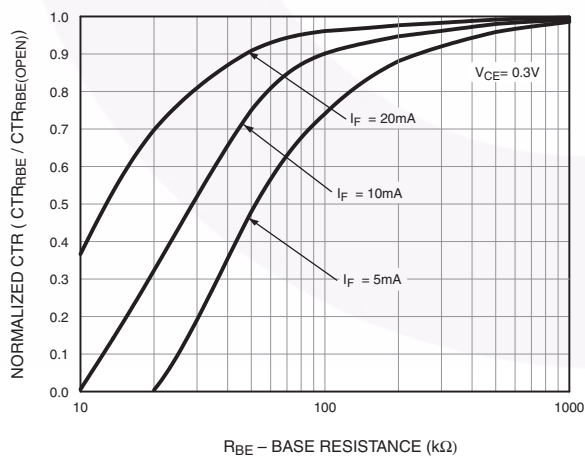


Fig. 6 Collector-Emitter Saturation Voltage vs Collector Current

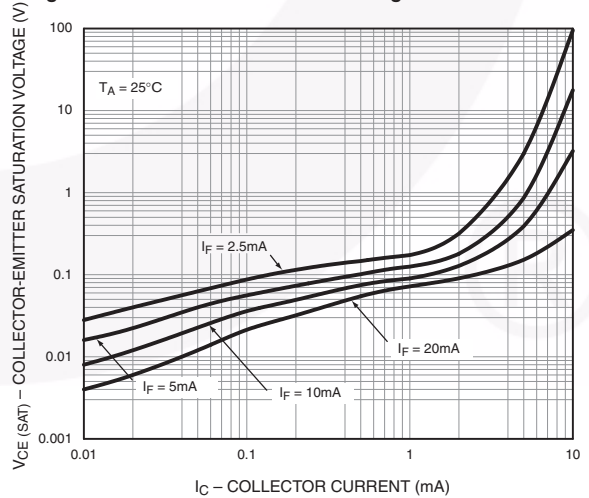

Typical Performance Curves (Continued)

Fig. 7 Switching Speed vs. Load Resistor

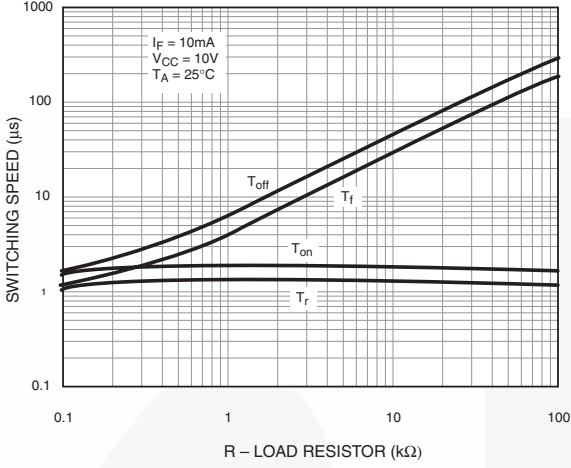


Fig. 8 Normalized t_{on} vs. R_{BE}

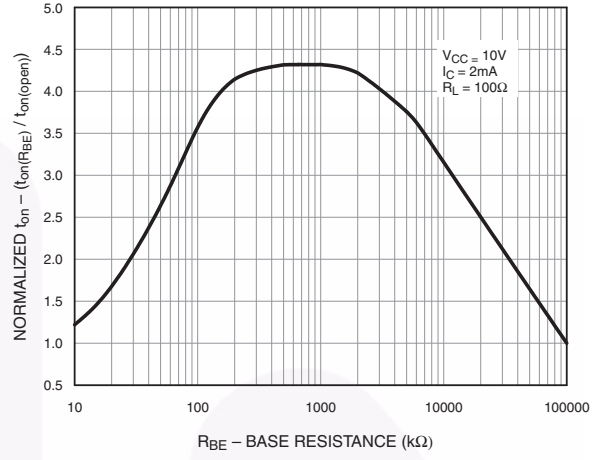


Fig. 9 Normalized t_{off} vs. R_{BE}


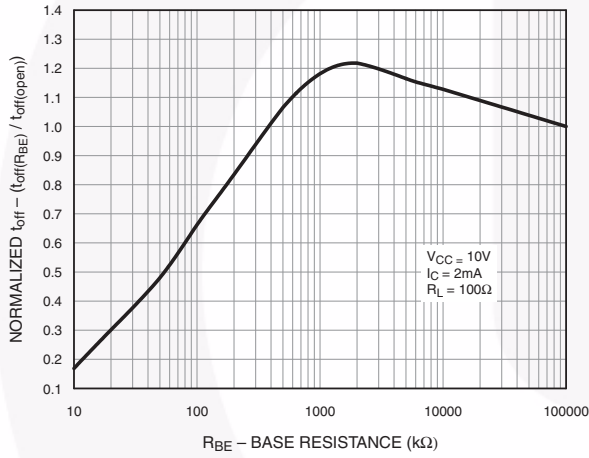


Fig. 10 Dark Current vs. Ambient Temperature

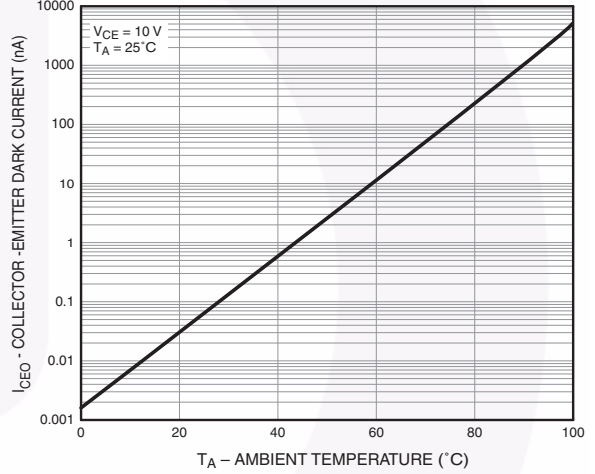

Typical Electro-Optical Characteristics

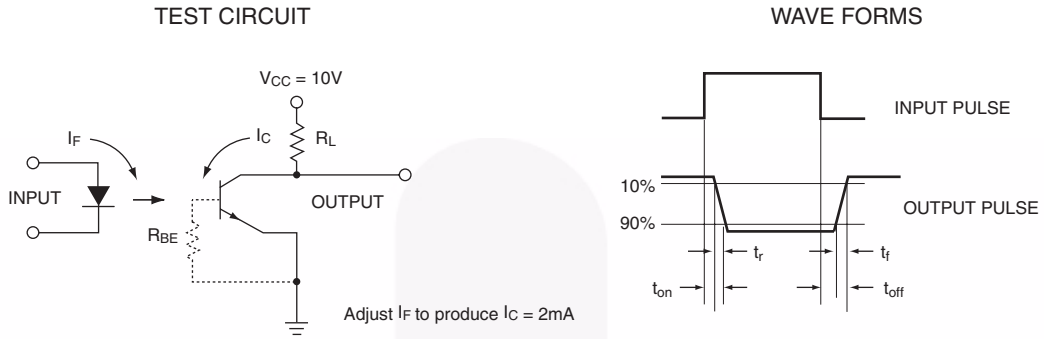


Figure 11. Switching Time Test Circuit and Waveforms


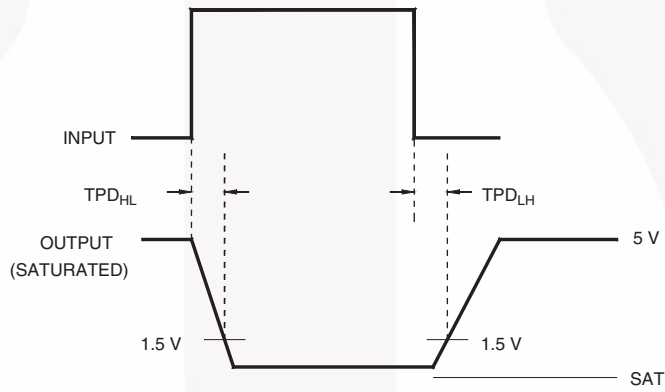


Figure 12. Switching Time Waveforms (MCT210M)

Ordering Information

| Option | Order Entry Identifier (Example) | Description |
|-----------|----------------------------------|---|
| No suffix | MCT2M | Standard Through Hole Device (50 units per tube) |
| S | MCT2SM | Surface Mount Lead Bend |
| SR2 | MCT2SR2M | Surface Mount; Tape and Reel (1,000 units per reel) |
| T | MCT2TM | 0.4" Lead Spacing |
| V | MCT2VM | IEC60747-5-2 |
| TV | MCT2TVM | IEC60747-5-2, 0.4" Lead Spacing |
| SV | MCT2SVM | IEC60747-5-2, Surface Mount |
| SR2V | MCT2SR2VM | IEC60747-5-2, Surface Mount, Tape and Reel (1,000 units per reel) |


Marking Information

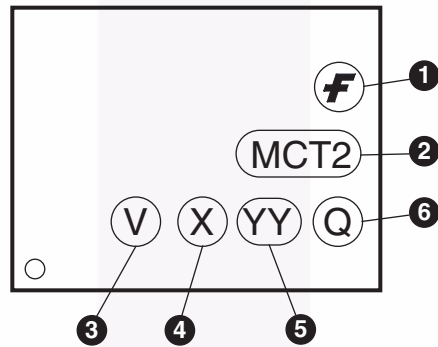


| Definitions | |
|-------------|--|
| 1 | Fairchild logo |
| 2 | Device number |
| 3 | VDE mark (Note: Only appears on parts ordered with VDE option – See order entry table) |
| 4 | One digit year code, e.g., '7' |
| 5 | Two digit work week ranging from '01' to '53' |
| 6 | Assembly package code |


*Note – Parts that do not have the 'V' option (see definition 3 above) that are marked with date code '325' or earlier are marked in portrait format.

Carrier Tape Specification

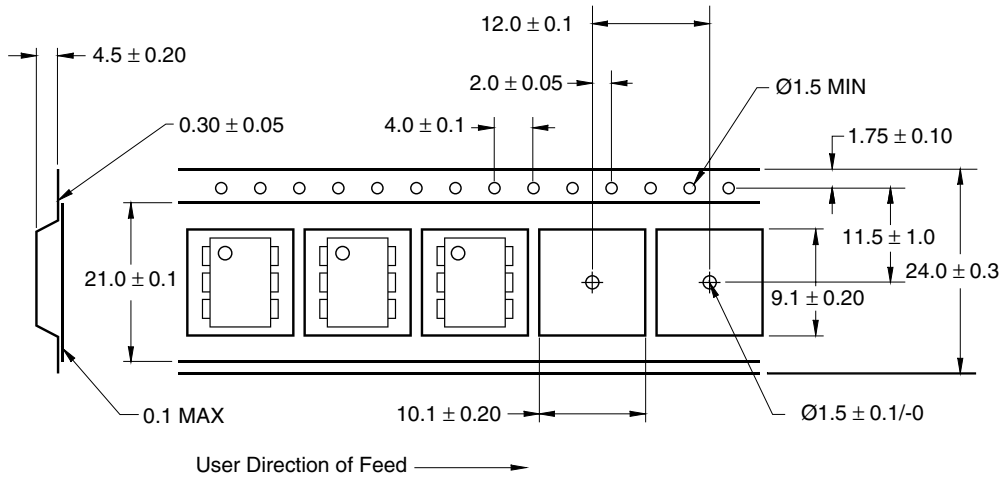

Reflow Profile

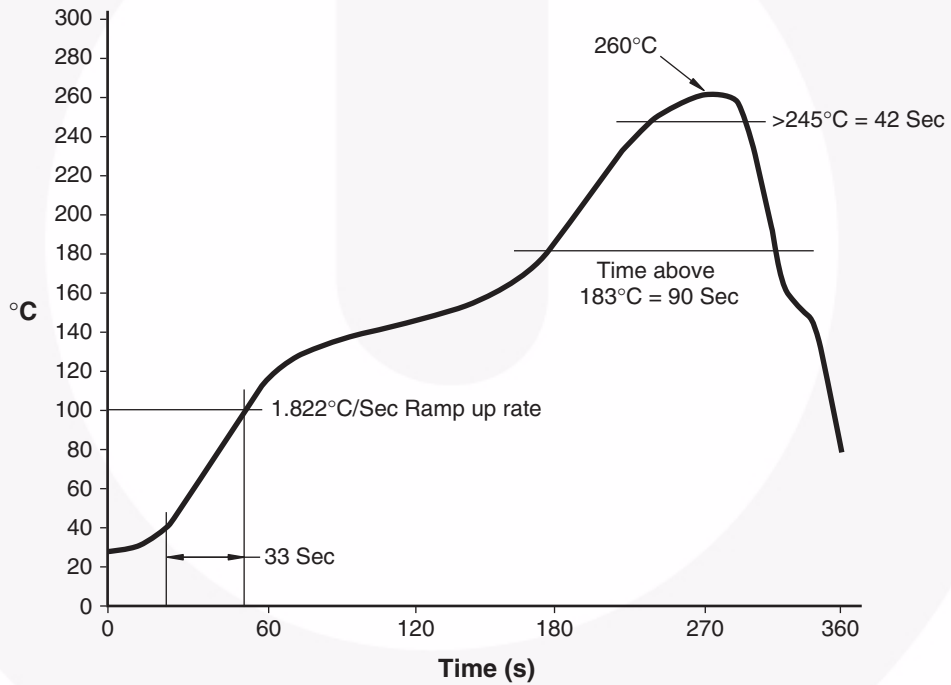

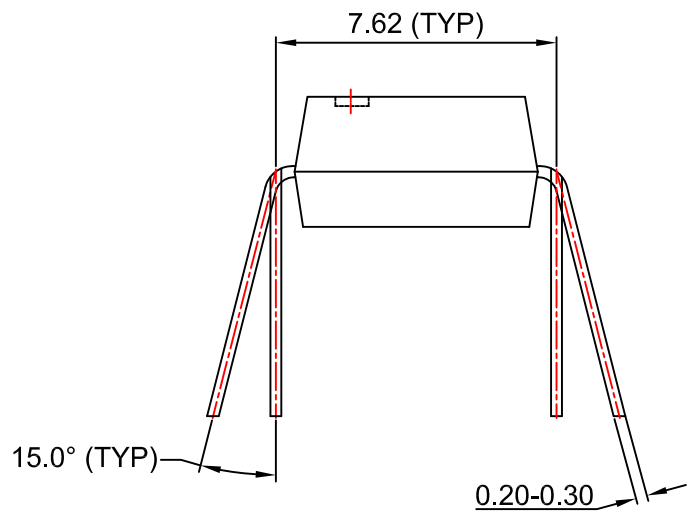

NOTES:

- A) NO STANDARD APPLIES TO THIS PACKAGE.
- B) ALL DIMENSIONS ARE IN MILLIMETERS.
- C) DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSION
- D) DRAWING FILENAME AND REVISION: MKT-N06BREV4.





LAND PATTERN RECOMMENDATION



NOTES:

- A) NO STANDARD APPLIES TO THIS PACKAGE.
- B) ALL DIMENSIONS ARE IN MILLIMETERS.
- C) DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSION
- D) DRAWING FILENAME AND REVISION : MKT-N06CREV4.





TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

- | | | | |
|--------------------------|--|---------------------------------------|------------------|
| AccuPower™ | F-PFS™ | OPTOPLANAR® | SYSTEM GENERAL® |
| AttitudeEngine™ | FRFET® | Power Supply WebDesigner™ | TinyBoost® |
| Awinda® | Global Power Resource SM | PowerTrench® | TinyBuck® |
| AX-CAP®* | GreenBridge™ | PowerXS™ | TinyCalc™ |
| BitSiC™ | Green FPS™ | Programmable Active Droop™ | TinyLogic® |
| Build it Now™ | Green FPS™ e-Series™ | QFET® | TINYOPTO™ |
| CorePLUS™ | Gmax™ | QS™ | TinyPower™ |
| CorePOWER™ | GTO™ | Quiet Series™ | TinyPWM™ |
| CROSSVOL™ | IntelliMAX™ | RapidConfigure™ | TinyWire™ |
| CTL™ | ISOPLANAR™ | Saving our world, 1mW/W/kW at a time™ | TranSiC™ |
| Current Transfer Logic™ | Making Small Speakers Sound Louder and Better™ | SignalWise™ | TriFault Detect™ |
| DEUXPEED® | MegaBuck™ | SmartMax™ | TRUECURRENT®* |
| Dual Cool™ | MICROCOUPLER™ | SMART START™ | μSerDes™ |
| EcoSPARK® | MicroFET™ | Solutions for Your Success™ | UHC® |
| EfficientMax™ | MicroPak™ | SPM® | Ultra FRFET™ |
| ESBC™ | MicroPak2™ | STEALTH™ | UniFET™ |
| F [®] | MillerDrive™ | SuperFET® | VCX™ |
| Fairchild® | MotionMax™ | SuperSOT™-3 | VisualMax™ |
| Fairchild Semiconductor® | MotionGrid® | SuperSOT™-6 | VoltagePlus™ |
| FACT Quiet Series™ | MTi® | SuperSOT™-8 | XST™ |
| FACT® | MTx® | SupreMOS® | Xsens™ |
| FastvCore™ | MVN® | SyncFET™ | 仙童® |
| FETBench™ | mWSaver® | Sync-Lock™ | |
| FPS™ | OptoHiT™ | | |
| | OPTOLOGIC® | | |

* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. TO OBTAIN THE LATEST, MOST UP-TO-DATE DATASHEET AND PRODUCT INFORMATION, VISIT OUR WEBSITE AT [HTTP://WWW.FAIRCHILDSEMI.COM](http://www.fairchildsemi.com). FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

AUTHORIZED USE

Unless otherwise specified in this data sheet, this product is a standard commercial product and is not intended for use in applications that require extraordinary levels of quality and reliability. This product may not be used in the following applications, unless specifically approved in writing by a Fairchild officer: (1) automotive or other transportation, (2) military/aerospace, (3) any safety critical application – including life critical medical equipment – where the failure of the Fairchild product reasonably would be expected to result in personal injury, death or property damage. Customer's use of this product is subject to agreement of this Authorized Use policy. In the event of an unauthorized use of Fairchild's product, Fairchild accepts no liability in the event of product failure. In other respects, this product shall be subject to Fairchild's Worldwide Terms and Conditions of Sale, unless a separate agreement has been signed by both Parties.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Terms of Use

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS

Definition of Terms

| Datasheet Identification | Product Status | Definition |
|--------------------------|-----------------------|---|
| Advance Information | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice. |
| Preliminary | First Production | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design. |
| Obsolete | Not In Production | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only. |