


Data sheet

chainflex® CF211



Measuring system cable (Class 4.2.2.1) ● For medium duty applications ● PVC outer jacket
● Shielded ● Oil-resistant ● Flame retardant

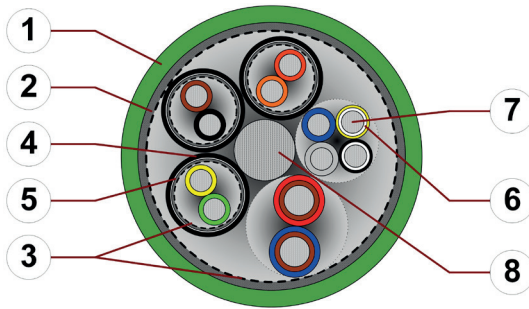

1. Outer jacket: Pressure extruded, oil-resistant PVC mixture
2. Overall shield: Extremely bending-stable braid made of tinned copper wires
3. Banding: Plastic foil
4. Element jacket: Mechanically high-quality TPE mixture
5. Element shield: Extremely bending-stable wrapping made of tinned copper wires
6. Core insulation: Mechanically high-quality TPE mixture
7. Conductor: Fine-wire strand in highly bending-stable version consisting of tinned copper wires
8. Strain relief: Tensile stress-resistant centre element

Example image
For detailed overview please see design table

Cable structure

	Conductor	Very finely stranded special cores of particularly high-flex design made of tinned copper wires.
	Core insulation	Mechanically high-quality TPE mixture.
	Core structure	According to measuring system specification.
	Core identification	According to measuring system specification. ▶ Product range table
	Element shield	Extremely bending-resistant, tinned copper cover. Coverage approx. 90 % optical
	Element jacket	TPE mixture on pair shielding adapted to suit the requirements in e-chains®.
	Intermediate layer	Foil taping over the outer layer.
	Overall shield	Extremely bending-resistant braiding made of tinned copper wires. Coverage approx. 55 % linear, approx. 80 % optical
	Outer jacket	Low-adhesion, oil-resistant PVC mixture, adapted to suit the requirements in e-chains® (following DIN EN 50363-4-1). Colour: Yellow-green (similar to RAL 6018) Printing: black

„00000 m**** igus chainflex CF211.----① -----② E310776 cRUus AWM
Style -----③ VW-1 AWM I/II A/B 80°C 300V FT1 EAC/CTP CE RoHS-II
conform www.igus.de +++ chainflex cable works +++

* **Length printing:** Not calibrated. Only intended as an orientation aid.
① / ② Cable identification according to Part No. (see technical table).
③ Printing of the UL Style (see certifications for details).
Example: ... chainflex **CF211.011 (4x(2x0.34)+4x0.5)C E310776 ...**



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Data sheet

chainflex® CF211








Measuring system cable (Class 4.2.2.1) ● For medium duty applications ● PVC outer jacket
● Shielded ● Oil-resistant ● Flame retardant



Example image

Dynamic information

	Bend radius	e-chain® linear flexible fixed	minimum 10 x d minimum 8 x d minimum 5 x d
	Temperature	e-chain® linear flexible fixed	+5 °C up to +70 °C -5 °C up to +70 °C (following DIN EN 60811-504) -15 °C up to +70 °C (following DIN EN 50305)
	v max.	unsupported gliding	5 m/s 3 m/s
	a max.		30 m/s ²
	Travel distance		Unsupported travels and up to 10 m for gliding applications, Class 2



These values are based on specific applications or tests. They do not represent the limit of what is technically feasible.

Guaranteed service life according to guarantee conditions

Double strokes	5 million	7.5 million	10 million
Temperature, from/to [°C]	R min. [factor x d]	R min. [factor x d]	R min. [factor x d]
+5/+15	12.5	13.5	14.5
+15/+60	10	11	12
+60/+70	12.5	13.5	14.5

Minimum guaranteed service life of the cable under the specified conditions.
The installation of the cable is recommended within the middle temperature range.

Electrical information

	Nominal voltage	50 V 300 V (following UL)
	Testing voltage	500 V













Data sheet

chainflex® CF211



Measuring system cable (Class 4.2.2.1) ● For medium duty applications ● PVC outer jacket
● Shielded ● Oil-resistant ● Flame retardant

Properties and approvals

	Oil resistance	Oil-resistant (following DIN EN 50363-4-1), Class 2
	Flame retardant	According to IEC 60332-1-2, FT1, VW-1
	Silicone-free	Free from silicone which can affect paint adhesion (following PV 3.10.7 – status 1992)
	UL verified	Certificate No. B129699: „igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year“
	UL/CSA AWM	See table UL/CSA AWM for details
	NFPA	Following NFPA 79-2018, chapter 12.9
	EAC	Certificate No. RU C-DE.ME77.B.00295/19 (TR ZU)
	REACH	In accordance with regulation (EC) No. 1907/2006 (REACH)
	Lead-free	Following 2011/65/EC (RoHS-II/RoHS-III)
	Cleanroom	According to ISO Class 2. The outer jacket material of this series complies with CF5.10.07 - tested by IPA according to standard DIN EN ISO 14644-1
	CE	Following 2014/35/EU



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Example image

Data sheet

chainflex® CF211



Measuring system cable (Class 4.2.2.1) ● For medium duty applications ● PVC outer jacket
● Shielded ● Oil-resistant ● Flame retardant



Example image

Properties and approvals

UL/CSA AWM Details

Part No.	UL style core insulation	UL style outer jacket	UL Voltage Rating [V]	UL Temperature Rating [°C]
CF211.001	10467	2464	300	80
CF211.002	10467	2464	300	80
CF211.004	10467	2464	300	80
CF211.006	10467	2464	300	80
CF211.009	10467	2464	300	80
CF211.010	10467	2464	300	80
CF211.011	10467	2464	300	80
CF211.014	10467	2464	300	80
CF211.015	10467	2464	300	80
CF211.016	10467	2464	300	80
CF211.017	10467	2464	300	80
CF211.018	10467	2464	300	80
CF211.019	10467	2464	300	80
CF211.022	10467	2464	300	80
CF211.024	10467	2464	300	80
CF211.027	10467	2464	300	80
CF211.028	11602	20601	300	80
CF211.032	10467	2464	300	80
CF211.033	10467	2464	300	80
CF211.036	10467	2464	300	80
CF211.037	10467	2464	300	80
CF211.038	10467	2464	300	80
CF211.039	10467	2464	300	80



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Data sheet

chainflex® CF211




Measuring system cable (Class 4.2.2.1) ● For medium duty applications ● PVC outer jacket
 ● Shielded ● Oil-resistant ● Flame retardant



Example image

Typical lab test setup for this cable series

Test bend radius R	approx. 75 - 135 mm
Test travel S	approx. 1 - 15 m
Test duration	minimum 2 - 4 million double strokes
Test speed	approx. 0.5 - 2 m / s
Test acceleration	approx. 0.5 - 1.5 m / s ²

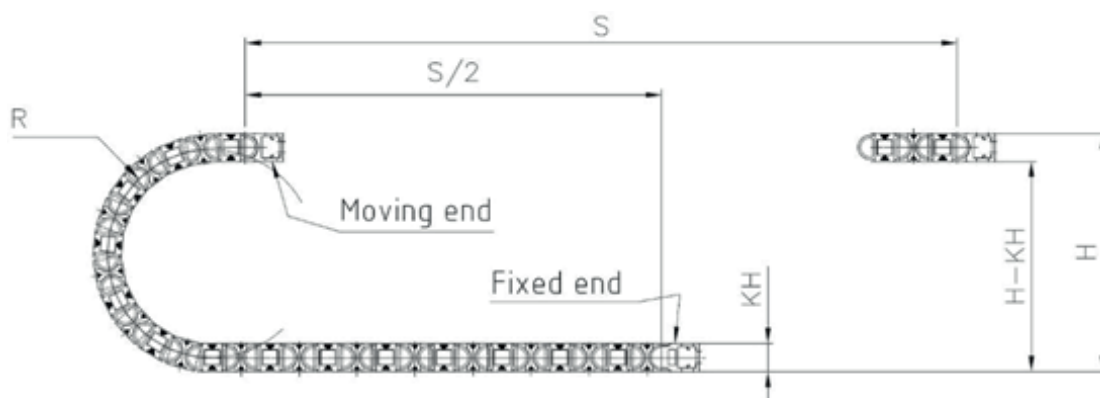

Typical application areas

- For medium duty applications, Class 4
- Unsupported travel distances and up to 10 m for gliding applications, Class 2
- Light oil influence, Class 2
- No torsion, Class 1
- Preferably indoor applications, but also outdoor ones at temperatures > 5 °C
- Storage and retrieval units for high-bay warehouses, machining units/package machines, Handling, indoor cranes, Wood/stone processing



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Data sheet

chainflex® CF211



Measuring system cable (Class 4.2.2.1) ● For medium duty applications ● PVC outer jacket
● Shielded ● Oil-resistant ● Flame retardant



Technical tables:

Mechanical information

Part No.	Number of cores and conductor nominal cross section [mm ²]	Outer diameter (d) max. [mm]	Copper index [kg/km]	Weight [kg/km]
CF211.001	(3x(2x0.14)C+(4x0.14)+(2x0.5))C	9.0	64	100
CF211.002	(3x(2x0.14)C+2x(0.5)C)C	9.5	66	106
CF211.004	(2x(2x(2x0.14))+(4x0.14)C+(4x0.5)C)	10.0	70	115
CF211.006	(3x(2x0.14)C+(4x0.14)+(4x0.25)+(2x0.5)C)	10.0	76	122
CF211.009	(4x(2x0.25)+2x0.5)C	8.0	49	79
CF211.010	(4x(2x0.25)+2x1.0)C	8.5	61	92
CF211.011	(4x(2x0.34)+4x0.5)C	9.5	72	109
CF211.014	(4x(2x0.25)C+(2x0.5)C)	10.5	77	124
CF211.015	(4x(2x0.14)+4x0.5)C	8.5	54	86
CF211.016	(3x(2x0.25)C)C	9.0	51	89
CF211.017	(4x(2x0.14)+(4x0.14)C+4x1.0)C	10.0	92	134
CF211.018	(2x(2x0.25)+2x0.5)C	6.5	34	54
CF211.019	(3x(2x0.25)C+(3x0.25)+2x1.0)C	10.0	86	125
CF211.022	((2x0.25)+5x0.5)C	7.0	46	71
CF211.024	((4x0.14)+2x(2x0.34))C	7.0	36	61
CF211.027	(5x(2x0.14)+2x0.5)C	8.0	45	75
CF211.028	(2x(2x0.15)+(2x0.38))C	7.5	40	77
CF211.032	3x(2x0.14)C+(3x0.14)C	8.0	35	79
CF211.033	4x(2x0.14)C+2x(1.0)C	9.5	64	112
CF211.036	(5x(2x0.25))C	8.0	42	69
CF211.037	(6x(2x0.25))C	8.5	51	83
CF211.038	(3x(2x0.14)+(2x0.34))C	7.5	33	62
CF211.039	(4x(2x0.14)C+2x(0.5)C)C	10.0	77	125

Note: The given outer diameters are maximum values and may tend toward lower tolerance limits.
G = with green-yellow earth core x = without earth core

Electrical information

Conductor nominal cross section [mm ²]	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2) [Ω/km]	Maximum current rating at 30 °C [A]
0.14	145.0	2.5
0.15	146.0	2.5
0.25	85.0	5
0.34	62.0	7
0.38	60.0	7
0.5	42.0	10
1.0	21.0	17

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Example image

Data sheet

chainflex® CF211



Measuring system cable (Class 4.2.2.1) ● For medium duty applications ● PVC outer jacket
 ● Shielded ● Oil-resistant ● Flame retardant

Design table

Part No.	Core group	Colour code	Core design
CF211.001	3x(2x0.14)C	green/yellow, black/brown, red/orange	
	(4x0.14)	grey/blue/white-yellow/white-black	
	(2x0.5)	brown-red, brown-blue	
CF211.002	3x(2x0.14)C	green/yellow, black/brown, red/orange	
	2x(0.5)C	black, red	
CF211.004	2x(2x(2x0.14))	(brown/green)/(yellow/violet), (grey/pink)/(red/black)	
	(4x0.14)C	yellow-black/red-black/green-black/blue-black	
	(4x0.5)	brown-green/white-green/blue/white	
CF211.006	3x(2x0.14)C	green/yellow, black/brown, red/orange	
	(4x0.14)	grey/blue/white-yellow/white-black	
	(4x0.25)	brown-yellow/brown-grey/green-black/green-red	
	(2x0.5)	brown-red, brown-blue	
CF211.009	4x(2x0.25)	brown/green, blue/violet, grey/pink, red/black	
	2x0.5	white, brown	
CF211.010	4x(2x0.25)	brown/green, blue/violet, grey/pink, red/black	
	2x1.0	white, brown	
CF211.011	4x(2x0.34)	black/brown, red/orange, green/yellow, blue/violet	
	4x0.5	black-white, red-white, yellow-white, blue-white	

Example image



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Data sheet

chainflex® CF211



Measuring system cable (Class 4.2.2.1) ● For medium duty applications ● PVC outer jacket
 ● Shielded ● Oil-resistant ● Flame retardant

Design table

Part No.	Core group	Colour code	Core design
CF211.014	4x(2x0.25)C	white/brown, green/yellow, grey/pink, blue/red	
	(2x0.5)	black no. 1/black no. 2	
CF211.015	4x(2x0.14)	brown/green, yellow/violet, grey/pink, red/black	
	4x0.5	blue, white, brown-green, white-green	
CF211.016	3x(2x0.25)C	white/brown, green/yellow, grey/pink	
	4x(2x0.14)	red/black, brown/green, yellow/violet, grey/pink	
CF211.017	(4x0.14)C	blue-black/yellow-black/red-black/green-black	
	4x1.0	white-green, brown-green, blue, white	
	2x(2x0.25)	red/black, grey/pink	
CF211.018	2x0.5	white, brown	
	3x(2x0.25)C	brown/green, grey/pink, red/black	
CF211.019	(3x0.25)	blue/violet/yellow	
	2x1.0	white, brown	
	(2x0.25)	white/brown	
CF211.022	5x0.5	green, yellow, grey, pink, blue	



Example image



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Data sheet

chainflex® CF211



Measuring system cable (Class 4.2.2.1) ● For medium duty applications ● PVC outer jacket
 ● Shielded ● Oil-resistant ● Flame retardant

Design table

Part No.	Core group	Colour code	Core design
CF211.024	(4x0.14)	yellow/grey/violet/pink	
	2x(2x0.34)	white-green/white, brown-green/blue	
CF211.027	5x(2x0.14)	brown/green, yellow/grey, white/violet, red/black, pink/blue	
	2x0.5	white-green, white-red	
CF211.028	2x(2x0.15)	green/yellow, pink/blue	
	(2x0.38)	red/black	
CF211.032	3x(2x0.14)C	green/black, yellow/black, red/black	
	(3x0.14)C	grey/pink/black	
CF211.033	4x(2x0.14)C	yellow/black, red/black, blue/black, green/black	
	2x(1.0)C	white, brown	
CF211.036	5x(2x0.25)	white/brown, green/yellow, grey/pink, blue/red, black/violet	
CF211.037	6x(2x0.25)	white/brown, green/yellow, grey/pink, blue/red, black/violet, grey-pink/red-blue	



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Textirahmen_



Data sheet

chainflex® CF211



Measuring system cable (Class 4.2.2.1) ● For medium duty applications ● PVC outer jacket
 ● Shielded ● Oil-resistant ● Flame retardant



Textirahmen_

Part No.	Core group	Colour code	Core design
CF211.038	3x(2x0.14)	white/brown, green/yellow, grey/pink	
	(2x0.34)	blue/red	
CF211.039	(4x(2x0.14)C	green/yellow, grey/pink, blue/red, black/violet	
	2x(0.5)C	white, brown	



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year

