


3.7kW Single-Phase 208/230V Switched PDU - LX Platform, 7 C13, 1 C19 Outlets, C20 / L6-20P Inputs, 0U 988mm, TAA

MODEL NUMBER: PDUMV20HVNET2LX

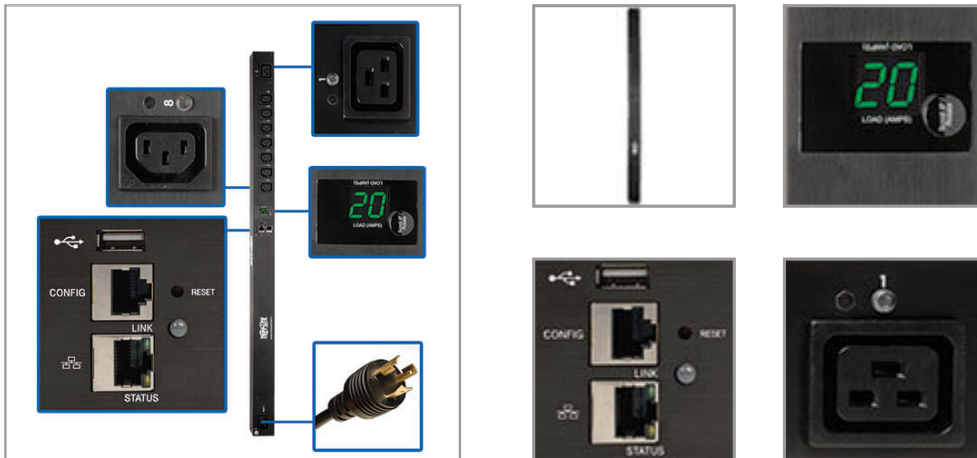

3.7kW vertical PDU distributes, monitors and manages single-phase power in an IT or industrial environment. Built-in Java-free network interface helps you remotely monitor load levels to prevent overloads that cause downtime.

Description

The PDUMV20HVNET2LX 3.3-3.7kW Single-Phase Switched PDU provides advanced network control and remote power monitoring with the ability to turn on, turn off, reboot or lock out power to each outlet. Recommended for your IT or industrial application, it features eight switched outlets (seven C13 and one C19) with included plug-lock insert sleeves to prevent cables from becoming accidentally disconnected. The C20 inlet is compatible with a wide variety of user-supplied power cords for connecting to an AC source, generator or protected UPS. A detachable 10-ft. (3.05 m) cord with NEMA L6-20P plug is included.

The built-in Java-free HTML5-based LX Platform network interface enables full remote access for PDU status monitoring and email notifications via secure web browser, SNMP, telnet or SSH. It supports 10/100 Mbps auto-sensing for optimum communication with an Ethernet network. Optional EnviroSense2 modules (sold separately) provide a variety of environmental monitoring capabilities. Protocols supported include IPv4, IPv6, HTTP, HTTPS, SMTP, SNMPv1, SNMPv2c, SNMPv3, Telnet, SSH, CLI, FTP, DHCP and NTP.

A digital ammeter allows you to monitor the total connected load in real time to ensure it remains well below maximum capacity with no danger of overload. The switched PDU mounts in 0U of space in EIA-standard 19-inch racks using the included toolless mounting buttons or the included rack-mounting brackets. Use the included PDUMVROTATEBRKT kit to install the unit with outlets facing the rear for better airflow or equipment access.

Features

Distributes, Monitors and Manages Network-Grade AC Power 3.3-3.7kW 208/230 switched PDU with single-phase input C20 inlet compatible with wide variety of user-supplied power cords Detachable 10-ft. (3.05 m) cord with NEMA L6-20P plug included Firmware upgrades support future product enhancements

7 C13 and 1 C19 Switched Outlets Distribute AC Power Individual outlets can be remotely controlled to power up, power down, reboot or lock out devices Included plug-lock inserts prevent cables from becoming accidentally disconnected

Digital Ammeter Reports total connected equipment load in real time Supports IP-address self-ID Rotates 180° for easy reading at either angle

Highlights

- 3.3-3.7kW 208/230 single-phase switched 1-meter 0U PDU
- 8 individually controllable outlets—7 C13, 1 C19
- Pre-installed WEBCARDLX with latest version of PADM20 for IP-based Auto Probe feature
- Digital ammeter for on-site load monitoring in real time
- C20 inlet input with detachable 10-ft. (3.05 m) NEMA L6-20P power cord

Package Includes

- PDUMV20HVNET2LX 3.3-3.7kW Single-Phase Switched PDU
- Built-in LX Platform interface
- Detachable NEMA L6-20P to C19 power cord, 10-ft. (3.05 m)
- Configuration cable
- (8) Plug-lock inserts
- Rack-mounting hardware
- PDUMVROTATEBRKT mounting bracket accessory
- Owner's manual

Built-In LX Platform Interface Pre-installed WEBCARDLX with the latest version of PowerAlert Device Manager firmware (PADM20) provides enhanced remote management capabilities. PADM20 and PowerAlert Element Manager (PAEM) form a powerful tool for expanding maintenance functions in large installations, including firmware update checks and backup and restoration of device configurations. IP-based Auto Probe detects lost connectivity and restores service autonomously.

Easy 0U Installation in EIA-Standard 19 in. Racks Mounts vertically using included toolless buttons or rack-mounting brackets. Included PDUMVROTATEBRKT allows mounting with rear-facing outlets.

TAA-Compliant Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases.

Specifications

OVERVIEW	
UPC Code	037332205278
PDU Type	Switched
INPUT	
PDU Input Voltage	208; 230
Recommended Electrical Service	Single-phase 16/20A 230/208V service
Maximum Input Amps	16
Maximum Input Amps Details	Agency de-rated to 16A continuous
Input Connection Type	C20 inlet accepts included L6-20P input cable
PDU Plug Type	NEMA L6-20P; IEC-320 C20
Input Phase	Single-Phase
Input Cord Length (ft.)	10
Input Cord Length (m)	3.05
OUTPUT	
Output Capacity Details	3.7kW (230V), 3.3kW (208V) / 16A total capacity; 16A max per C19 outlet; 12A (10A CE) max per C13 outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(7) C13; (1) C19
Output Nominal Voltage	208/230V
Customized Load Management Receptacles	Each outlet is individually controllable via remote interface
USER INTERFACE, ALERTS & CONTROLS	
Front Panel LCD Display	Digital meter reports PDU output current in amps
Front Panel LEDs	24 power availability LEDs confirm power off/on status for each built-in outlet; LX Platform Interface: Network Link/Activity Status LED (Yellow), Network Speed LED (Green); LX Platform status LED (Green)
Switches	Push button to rotate the digital meter readout and display network address. LX Platform Interface: Recessed reset switch for interface reboot and factory reset

SURGE / NOISE SUPPRESSION	
Automatic Shut-Off	No
PHYSICAL	
Material of Construction	Metal
Form Factors Supported	0U vertical rackmount; includes rackmount brackets. Supports toolless mounting in button-mount compatible racks
PDU Form Factor	Vertical (0U)
Shipping Dimensions (hwd / in.)	41.54 x 5.79 x 3.94
Shipping Dimensions (hwd / cm)	105.51 x 14.71 x 10.01
Shipping Weight (lbs.)	6.00
Shipping Weight (kg)	2.72
Unit Dimensions (hwd / in.)	38.900 x 2.190 x 1.930
Unit Dimensions (hwd / cm)	98,8 x 5,6 x 4,9
Unit Weight (lbs.)	3.9
Unit Weight (kg)	1.77
ENVIRONMENTAL	
Operating Temperature Range	0C ~ 50C (32F ~ 122F)
Storage Temperature Range	-30°C to +60°C (-22°F to +140°F)
Relative Humidity	5-95% non-condensing
Operating Elevation (ft.)	0-10,000
Operating Elevation (m)	0-3000
COMMUNICATIONS	
PowerAlert Software	LX Platform Interface: PowerAlert Device Manager
Communications Cable	RJ45-to-DB9 configuration/console Access cable
Network Monitoring Port	Network Monitoring Port Attribute - RJ45 Network port, RJ45 Config/Console Access port; USB A port supports a variety of Envirosense2 environmental and control modules. See Accessories>Management Hardware section for more information about these modules
SNMP Compatibility	Pre-installed LX platform interface provides remote monitoring via Java-free HTML5 web interface, Telnet, SSH, CLI and SNMP management systems
Network Compatibility	10 Mbps; 100 Mbps (Fast Ethernet)
FEATURES & SPECIFICATIONS	
High Availability PDU Features	Auto Probe Monitoring and Reboot (included); Auto Load Shedding
STANDARDS & COMPLIANCE	
Product Certifications	CAN/CSA-C22.2 No. 60950-1 (Canada); NOM (Mexico); UL 60950-1

TRIPP-LITE

by **EAT•N**

1000 Eaton Boulevard
Cleveland, OH 44122
United States

Product Compliance	RoHS; CE (Europe); FCC Part 15 Class A (USA); Trade Agreements Act (TAA)
WARRANTY & SUPPORT	
Product Warranty Period (Worldwide)	2-year limited warranty

TRIPP-LITE

by **EAT•N**

© 2022 Eaton. All Rights Reserved.
Eaton is a registered trademark. All other trademarks
are the property of their respective owners.