


U.I. Lapp GmbH	PRODUCT INFORMATION	
	SKINTOP® ST	07.11.2014

Various accessories (e.g. multiple sealing inserts)
 High oil-resistance for maximum reliability
 Permanent vibration protection
 Optimum strain relief
 Wide, variable clamping ranges




Good chemical resistance



Wide clamping range



Mechanical resistance



Optimum strain relief



Temperature-resistant



Variety of approval certifications

Application range

Used in areas where cables and wires need to be safely inserted into housings
 Machine and equipment manufacturing
 Photovoltaic
 Automation technology

Product Make-up

PG connection thread

Norm references / Approvals

UL File Nr. E79903


Note

Refer to SKINTOP® PG accessories for suitable accessories
 Counter nut to be used: SKINTOP® GMP-GL

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Product Management	Document: LAPP_PRO1066EN.pdf	1 / 4
--------------------	------------------------------	-------

U.I. Lapp GmbH	PRODUCT INFORMATION	
	SKINTOP® ST	07.11.2014

Technical Data


Caution:	Refer to Appendix T21 for the installation dimensions and torques
Classification:	ETIM 5.0 Class-ID: EC000441 ETIM 5.0 Class-Description: cable screw gland
Colour delivered:	Silver grey (RAL 7001) Light grey (RAL 7035) Black (RAL 9005), UV-resistant
Material:	Body: Polyamide Seal: CR
Tests:	GGVS: TÜ.EGG.020-95
Protection rating:	IP 68 - 5 bar
Temperature range:	-20°C to +100°C


Product Management	Document: LAPP_PRO1066EN.pdf	2 / 4
--------------------	------------------------------	-------

SKINTOP® ST

07.11.2014

Part number	Article designation / size	Clamping range ØF (mm)	SW (mm)	Overall length/ C (mm)	Thread length/ D (mm)	Pieces / PU
SKINTOP® ST silver grey						
53015000	ST 7	2,5 - 6,5	15	32.0	8.0	100
53015010	ST 9	3,5 - 8	19	36.0	8.0	100
53015020	ST 11	4 - 10	22	38.0	8.0	100
53015030	ST 13,5	6 - 12	24	41.0	9.0	100
53015040	ST 16	9 - 14	27	44.0	10.0	50
53015050	ST 21	13 - 18	33	49.0	11.0	50
53015060	ST 29	14 - 25	42	56.0	11.0	25
53015070	ST 36	24 - 32	53	66.0	13.0	10
53015080	ST 42	35 - 38	60	68.0	13.0	5
53015090	ST 48	39 - 44	65	69.0	14.0	5
SKINTOP® ST black						
53015200	ST 7	2,5 - 6,5	15	32.0	8.0	100
53015210	ST 9	3,5 - 8	19	36.0	8.0	100
53015220	ST 11	4 - 10	22	38.0	8.0	100
53015230	ST 13,5	6 - 12	24	41.0	9.0	100
53015240	ST 16	9 - 14	27	44.0	10.0	50
53015250	ST 21	13 - 18	33	49.0	11.0	50
53015260	ST 29	14 - 25	42	56.0	11.0	25
53015270	ST 36	24 - 32	53	66.0	13.0	10
53015280	ST 42	35 - 38	60	68.0	13.0	5
53015290	ST 48	39 - 44	65	69.0	14.0	5
SKINTOP® ST light grey						
53018000	ST 7	2,5 - 6,5	15	32.0	8.0	100
53018010	ST 9	3,5 - 8	19	36.0	8.0	100
53018020	ST 11	4 - 10	22	38.0	8.0	100
53018030	ST 13,5	6 - 12	24	41.0	9.0	100
53018040	ST 16	9 - 14	27	44.0	10.0	50
53018050	ST 21	13 - 18	33	49.0	11.0	50
53018060	ST 29	14 - 25	42	56.0	11.0	25
53018070	ST 36	24 - 32	53	66.0	13.0	10
53018080	ST 42	35 - 38	60	68.0	13.0	5
53018090	ST 48	39 - 44	65	69.0	14.0	5

U.I. Lapp GmbH	PRODUCT INFORMATION	 LAPP GROUP
SKINTOP® ST		07.11.2014

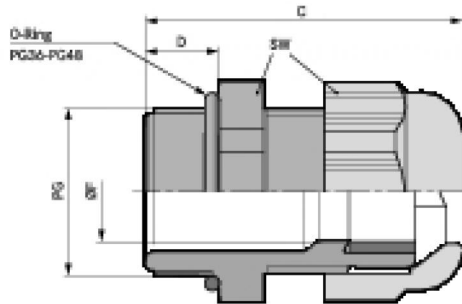

Product Management	Document: LAPP_PRO1066EN.pdf	4 / 4
--------------------	------------------------------	-------